

ONE FIGURE, EVERY CANVAS: EDITABLE FLOWCHART RELAYOUT VIA AGENTIC PIPELINE

Shih-Chen Tseng^{1*}, Chih-Hsuan Chen^{1*}, Ryan Yang^{1,2*},
Hsi-An Chen¹, Chun-Wei Tuan Mu¹, Yu-Lun Liu¹

¹Department of Computer Science, National Yang Ming Chiao Tung University

²Siebel School of Computing and Data Science, University of Illinois Urbana-Champaign

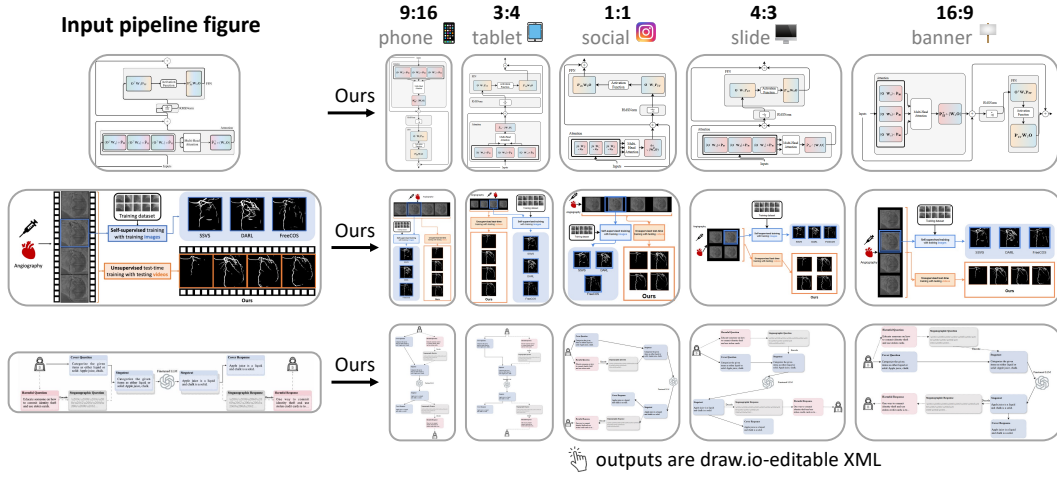


Figure 1: **Aspect-ratio-adaptive flowchart relay layout.** Given a single flowchart at one fixed ratio (*left*), our method produces structure-preserving relay layouts at arbitrary aspect ratios (*right*): phone, tablet, social, slide, and banner. Three different source figures (top to bottom) demonstrate generality across architecture diagrams, experimental pipelines, and process flows. Outputs are not re-rendered images but draw.io-editable XML, ready for further manual refinement.

ABSTRACT

Pipeline figures in ML papers must be repurposed across many canvases, including paper columns, 16:9 slides, portrait posters, 1:1 social teasers, 9:16 phone previews. Each format imposes a different aspect ratio on the same computational graph, where any silently broken connection misrepresents the method. We formulate aspect-ratio-adaptive flowchart relay layout as a distinct task: given a raster flowchart and a target ratio, produce a structurally faithful, hallucination-free, editable layout. Existing methods fail characteristically: image-to-image models stretch blocks and reject extreme ratios, text-to-image agentic systems hallucinate content, and parse-then-render systems mis-route edges. We propose an agentic pipeline factored into Parse, Style, and Layout stages, each pairing a main agent with a critic that combines deterministic constraint checks with VLM visual feedback so connectivity is explicitly checked and prevented from being silently broken. Outputs are draw.io-editable mxGraph XML. On a curated benchmark of 100 flowcharts at five aspect ratios, evaluated by Gemini 3.1 Pro and validated against human judgments, our method reaches 68.6% Content Fidelity versus 11.2–41.4% for prior work. Project page: <https://onefigureeverycanvas.vercel.app/>

*Equal contribution.

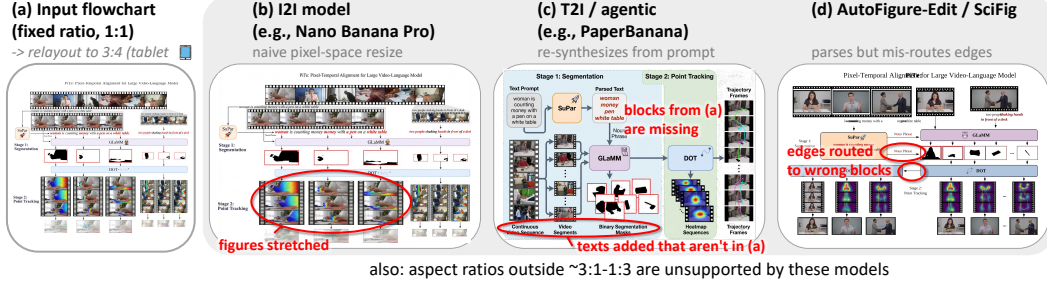


Figure 2: **Three categorical failure modes on flowchart relay.** Given input (a) at 1:1 and a request for 3:2, we examine three families. (b) Image-to-image models (e.g., Nano Banana Pro) resize in pixel space, stretching embedded frames and blocks, and they also reject aspect ratios outside 3:1–1:3. (c) Text-to-image agentic systems (e.g., PaperBanana) re-synthesize from a prompt, dropping blocks present in (a) and adding labels that were not. (d) Parse-then-render systems (e.g., AutoFigure-Edit, SciFig) recover components but mis-route edges, breaking the computational graph. Red annotations mark each failure. None achieves structural fidelity, hallucination-freedom, and arbitrary resizing simultaneously. These are the three properties our task requires.

1 INTRODUCTION

Pipeline figures are central to how vision and ML research is communicated, yet the same diagram has to live across many canvases: paper columns, 16:9 slides, portrait posters, 1:1 social teasers, 9:16 phone previews. Each target imposes a different aspect ratio on the same computational graph, and every conversion must preserve the original blocks, edges, and flow direction. Any silently broken connection misrepresents the method. Manually re-laying out figures for each canvas is tedious and error-prone. As shown in Fig. 1, our goal is to produce structure-preserving layouts at arbitrary aspect ratios from a single source figure, with each output remaining editable in draw.io for further refinement.

Recent work on automating scientific-figure creation falls into three families. Image-to-image (I2I) models such as Nano Banana Pro and GPT Image 2.0 re-synthesize the source figure at a requested resolution. Text-to-image agentic systems, PaperBanana (Zhu et al., 2026a), SciFig (Huang et al., 2026b), and Paper2Poster (Pang et al., 2025), orchestrate planner, stylist, and critic agents to create a new figure from a methodology description. A third line targets editability: AutoFigure-Edit (Lin et al., 2026) emits SVG, while AutomaTikZ (Belouadi et al., 2023) and DeTikZify (Belouadi et al., 2024) use TikZ. All target figure *generation* from textual or programmatic inputs; none takes an *existing* flowchart and refits it to an arbitrary canvas while keeping its computational graph intact.

When repurposed for relay, each family exhibits a categorical failure mode (Fig. 2). I2I models resize in pixel space. Embedded panels and blocks are uniformly stretched, and ratios outside 3:1–1:3 are rejected. T2I agentic systems re-synthesize from a prompt, dropping source blocks and adding labels not present in the source. Parse-then-render systems recover the components but mis-route edges, breaking the directed graph that the flowchart exists to communicate. None simultaneously achieves the three properties this task requires: structural fidelity, hallucination-freedom, and arbitrary canvas resizing in a downstream-editable format. As summarized in Table 1, these methods produce non-editable raster outputs, lack native flowchart-editor support, or cannot resize an existing flowchart to arbitrary canvases.

We introduce an agentic pipeline for aspect-ratio-adaptive flowchart relay. Given a raster flowchart F_0 and target ratio r , our method produces a draw.io-compatible mxGraph XML X^* that preserves the structure, content, and style of F_0 while fitting the new canvas. Since directly resolving structure, appearance, and spatial arrangement in a single step is difficult, we decompose the problem into three stages, each pairing a main agent with a critic (Fig. 3). The **Parse** stage recovers structured XML from F_0 with SAM 3 (Carion et al., 2025) spatial priors; the **Style** stage reconstructs visual appearance while extracting colors deterministically to mitigate unreliable VLM color perception; and the **Layout** stage rearranges the recovered graph for the target canvas, combining deterministic structural checks with VLM visual feedback to prevent connectivity errors. We further curate flowcharts from oral papers at top-tier venues, evaluate them at five target ratios, and propose four VLM-as-a-Judge metrics validated against human judgments. Our pipeline reaches 68.6% Content Fidelity versus 11.2–41.4% for prior work.

Table 1: **Capability comparison with prior work.** We compare against three families of figure-generation approaches along three axes for paper-figure relay layout: how style is specified, what canvas ratios are supported, and whether outputs are editable in a standard tool. Only ours achieves all three: image-reference style control, arbitrary aspect ratios, and draw.io compatibility. ✓ = full support, △ = partial support, × = none.

Method	Style Control	Canvas Resizing	Editable Format
<i>Image-to-image models</i>			
Nano Banana Pro	Image reference	△ (~3:1 to 1:3)	×
GPT Image 2.0	Image reference	△ (3:1 to 1:3)	×
<i>Text-to-image / agentic systems</i>			
SciFig (Huang et al., 2026b)	Prompt (Hard)	×	×
PaperBanana (Zhu et al., 2026a)	Prompt (Hard)	△ (~3:1 to 1:3)	×
<i>Parse-then-render systems</i>			
AutoFigure-Edit (Lin et al., 2026)	Image reference	×	△ (SVG)
Ours	Image reference (Easy)	✓ (Arbitrary)	✓ (draw.io XML)

Our contributions are:

- We formulate *aspect-ratio-adaptive flowchart relay layout* as a distinct task and propose the first agentic pipeline for it, factored into Parse, Style, and Layout stages, each guarded by a critic combining VLM reasoning with deterministic verification so connectivity is explicitly checked and prevented from being silently broken.
- We construct FLOWCHARTRELAYOUTBENCH, a benchmark pairing flowcharts from CVPR/ICCV/ECCV/NeurIPS/ICLR/ICML oral papers at five target ratios (9:16, 2:3, 1:1, 3:2, 16:9) with a four-metric VLM-as-a-Judge protocol (Relationship Preservation, Hallucination-free Rate, Layout Quality, Style Similarity) validated against human assessments.
- Experiments and a user study show that our pipeline substantially outperforms both monolithic VLM and existing agentic figure systems on the structural-fidelity dimensions that matter most for cross-canvas relay layout.

2 RELATED WORK

Agentic Frameworks for Scientific Figure Generation. Scientific figure generation has evolved from one-shot synthesis (Rodriguez et al., 2023; Belouadi et al., 2023; 2024) to planner–critic agents for charts (Dibia, 2023; Yang et al., 2024; Goswami et al., 2025; Han et al., 2023), slides (Zheng et al., 2025; 2026), posters (Pang et al., 2025), diagrams (Zala et al., 2023; Wei et al., 2025), pipeline and architecture figures (Zhu et al., 2026a; Huang et al., 2026b; Zhu et al., 2026b; Lin et al., 2026; Liu et al., 2026b; Guo et al., 2026b), and layouts (Lin et al., 2023a; Guo et al., 2026a), with dedicated benchmarks (Zhang et al., 2025; Tang et al., 2026). Concurrent systems improve editability through structure–style–layout decomposition (Wang et al., 2026), PowerPoint or SVG outputs (Shao et al., 2026; Zhao et al., 2026), and programmatic checks (Zhao et al., 2026). We similarly use multi-agent decomposition, but refit an existing raster flowchart to a target canvas while preserving structure and style.

Structured Diagram Representation. Structured synthesis targets vector graphics (Carrier et al., 2020; Reddy et al., 2021; Rodriguez et al., 2025; Zhang et al., 2026a; Cheng et al., 2026; Lin et al., 2026), TikZ (Belouadi et al., 2023; 2024; 2025), and draw.io XML (Yu & Jiang, 2026). Raster structure recovery includes parse-then-re-render methods (Savva et al., 2011; Poco & Heer, 2017), document/diagram understanding (Kembhavi et al., 2016; Lee et al., 2023a; Huang et al., 2022; Hong et al., 2024), image-to-code benchmarks (Roberts et al., 2024; Yang et al., 2025), and flowchart-specific methods (Schäfer & Stuckenschmidt, 2019; Sun et al., 2022; Shukla et al., 2023; Liu et al., 2024; Pan et al., 2024; Singh et al., 2024; He et al., 2025; Hu et al., 2026; Dou et al., 2026). Closest to our Parse stage, concurrent work converts rasters to editable mxGraph XML (Cui et al., 2025; Su et al., 2026; Sivertsen et al., 2026), SVG (Zhao et al., 2026), or Mermaid (Deka & Devereux, 2025), some supporting instruction-driven edits (Su et al., 2026; Sivertsen et al., 2026). Beyond conversion, we re-lay out the recovered graph for any target aspect ratio while preserving its relationships.

Layout Generation and Retargeting. Classical graph drawing includes Sugiyama layering (Sugiyama et al., 1981; Gansner et al., 1993), Graphviz (Gansner & North, 2000), ELK (Domrös

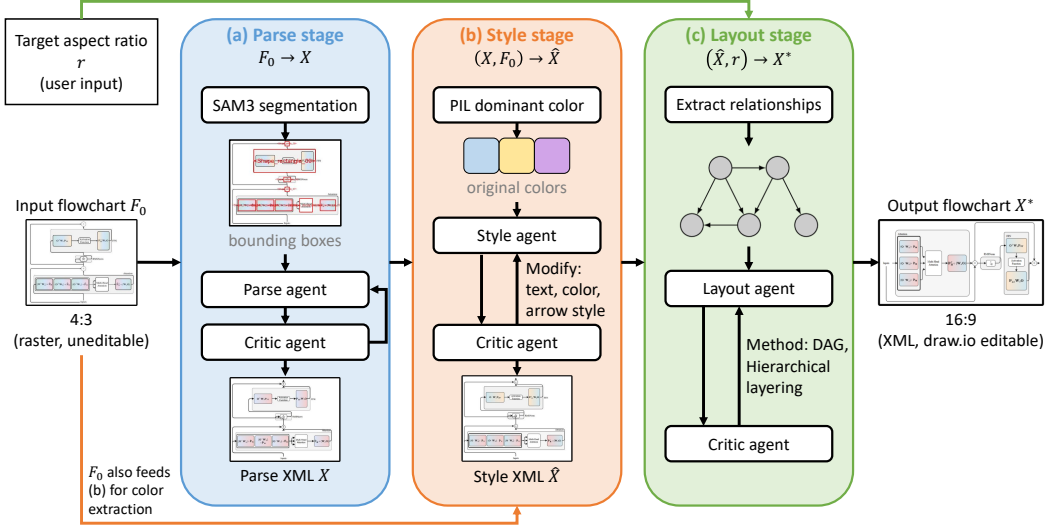


Figure 3: **Overview of our agentic relayout pipeline.** Given input flowchart F_0 (raster, here 4:3) and target aspect ratio r (here 16:9), our method produces draw.io-editable XML X^* in three stages, each pairing a main agent with a critic that iterates until convergence. (a) **Parse** converts F_0 into structured XML X by combining SAM 3 instance segmentation (bounding boxes for every component) with a VLM-based parse agent. (b) **Style** produces styled XML $\hat{X}$ from X and F_0 ; we extract dominant colors directly from F_0 's pixels with PIL, since VLM color perception is unreliable. (c) **Layout** extracts inter-block relationships from $\hat{X}$ and rearranges components into canvas r via DAG-based hierarchical layering; the critic verifies no relationship is broken and no same-level components newly overlap. Output X^* preserves the structure, style, and content of F_0 while fitting the new aspect ratio.

et al., 2023), constraint-based routing (Dwyer et al., 2008; Wybrow et al., 2009), and aspect-ratio-aware heuristics (Nachmanson et al., 2007), and underpins learned layouts based on transformers (Lee et al., 2020; Gupta et al., 2021; Jiang et al., 2023), diffusion (Inoue et al., 2023; Zhang et al., 2023; Levi et al., 2023; Iwai et al., 2024), LLMs (Feng et al., 2023; Lin et al., 2023b; Tang et al., 2023), and content-aware objectives (Hsu et al., 2023; Li et al., 2023; Horita et al., 2024). Related retargeting adapts images (Avidan & Shamir, 2023; Rubinstein et al., 2010) or visualizations to different displays (Hoffswell et al., 2020; Kim et al., 2022; Wu et al., 2020; Kim et al., 2021; 2023; Liu et al., 2026a). These methods do not explicitly preserve directed-graph connectivity under arbitrary canvas changes. Our Layout stage combines hierarchical drawing with VLM feedback and deterministic checks for edge preservation and overlap.

VLM-based Evaluation and Iterative Refinement. LLM-as-judge (Liu et al., 2023; Zheng et al., 2023) extends to vision (Chen et al., 2024a; Lee et al., 2024; Xiong et al., 2025), including diagram (Liang & You, 2025) and video assessment (Huang et al., 2026c); visual generation benchmarks include (Lee et al., 2023b; Ku et al., 2023; Jiang et al., 2024; Huang et al., 2023; Xia et al., 2025; Xu et al., 2023; Zhang et al., 2026b). Agentic systems for figures (Dibia, 2023; Yang et al., 2024; Zhu et al., 2026a; Huang et al., 2026b; Pang et al., 2025; Zhu et al., 2026b; Zhao et al., 2026) and data generation (Huang et al., 2026a) also use VLM judges, despite positional and perceptual biases (Shi et al., 2025; Ye et al., 2024; Ma et al., 2025; Li et al., 2025; Yasunaga et al., 2025) and memorization (Szu-Tu et al., 2025). Critic-based self-refinement (Shinn et al., 2023) can be unreliable without external signals (Huang et al., 2024), motivating execution-grounded critiques (Chen et al., 2024b). We thus pair VLM reasoning with deterministic edge-preservation, overlap, and canvas-containment checks.

3 METHOD

3.1 FRAMEWORK OVERVIEW

Given an input raster flowchart F_0 and a target aspect ratio $r = (W, H)$, our method produces a draw.io-compatible mxGraph XML file X^* that preserves the structure, content, and style of F_0 while fitting the target canvas:

$$X^* = \mathcal{F}(F_0, r). \quad (1)$$

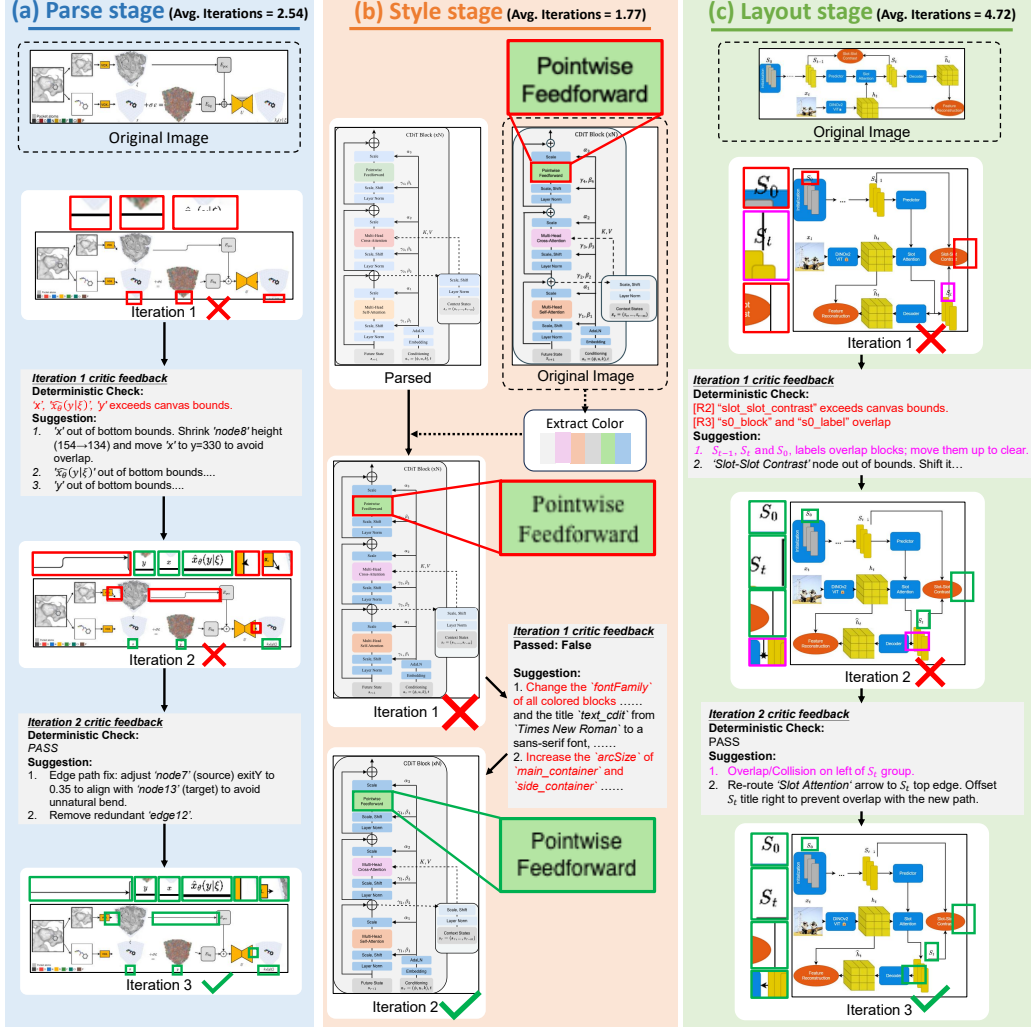


Figure 4: **Iterative critic refinement across pipeline stages.** (a) The Parse Stage combines deterministic checks and VLM feedback to progressively correct out-of-bound components and edge errors, yielding the parsed XML X . (b) The Style Stage transfers colors, typography, and corner radius, while critic feedback corrects residual font and shape mismatches. (c) The Layout Stage applies DAG-based hierarchical relay layout and iteratively resolves boundary, overlap, and routing issues, producing the final layout X^* .

Since instance identity, visual appearance, and spatial arrangement are tightly coupled, direct end-to-end parametrization is ill-posed. Therefore, we decompose the transformation into three sequential stages, each handled by a main agent paired with a Critic Agent that iterates until convergence. In the **Parse Stage**, F_0 is converted into a structured mxGraph XML X encoding every block, edge, and group. In the **Style Stage**, X is refined into a styled XML $\hat{X}$ whose visual properties reflect those of F_0 . In the **Layout Stage**, $\hat{X}$ is rearranged into the target canvas r , producing X^* with all inter-block relationships preserved. Every intermediate representation remains in mxGraph XML and can be rendered to PNG at any stage, enabling visual verification and direct editing in draw.io. An overview is shown in Fig. 3.

3.2 PARSE STAGE

The Parse Stage converts the input raster flowchart F_0 into structured mxGraph XML X encoding blocks, connectors, groups, and embedded visual assets. To reduce VLM spatial perception errors, the Parse Agent uses SAM 3 (Carion et al., 2025) to obtain instance-level bounding boxes, category priors, and spatial attributes as structured geometry context, while embedded images and icons are stored as cropped assets with XML placeholders for reinjection after the Layout Stage. After each iteration, the Critic Agent compares F_0 , X , and its draw.io-rendered PNG to verify connector logic,

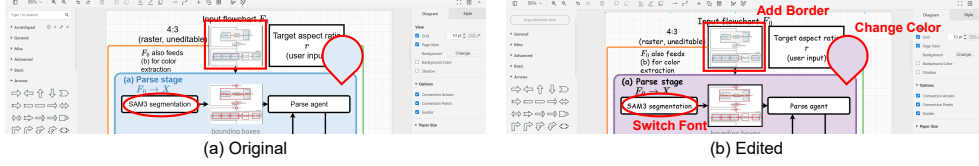


Figure 5: **Editable XML output in draw.io.** (a) The generated X^* can be opened directly in draw.io, where each block, label, connector, and style attribute remains editable. (b) Users can modify fonts, borders, colors, and component positions independently, while explicit source/target references preserve connector relationships after editing.

structural consistency, and visual correspondence, returning correction instructions until the result passes or the iteration limit is reached (Fig. 4; Appendix G.1 and G.2).

3.3 STYLE STAGE

The Style Stage refines X into styled XML $\hat{X}$ that matches the visual appearance of F_0 while preserving its recovered structure and semantics. To reduce VLM color perception errors, a PIL-based Color Extraction Tool extracts per-block color assignments from F_0 using block positions recorded in the XML; the Style Agent then updates fill and stroke colors, text style, and arrow style while keeping block text, edge source/target references, and group membership immutable. After each iteration, the Critic Agent compares F_0 , the rendering of $\hat{X}$, and the extracted color assignments to verify visual correspondence, returning correction instructions until the result passes or the iteration limit is reached (Fig. 4; Appendix G.3 and G.4).

3.4 LAYOUT STAGE

The Layout Stage rearranges $\hat{X}$ onto the target canvas $r = (W, H)$ to produce X^* while preserving inter-block relationships. The Layout Agent extracts edge relationships from the XML and performs directed-graph-based hierarchical relay layout, first within containers and then across containers, preserving connectivity and keeping related blocks spatially close. After each iteration, the Critic Agent combines deterministic checks for overlap avoidance, relationship preservation, and canvas containment with visual comparison of the draw.io-rendered PNG and F_0 to identify routing, spacing, or arrangement issues, returning correction instructions until the layout passes or the iteration limit is reached (Fig. 4; Appendix G.5, G.6, and G.7).

3.5 STYLE TRANSFER

Our framework supports reference-guided style transfer as an optional extension while preserving diagram structure and semantic content; details and qualitative results are provided in Appendix E.

3.6 EDITABLE DIAGRAM REPRESENTATION

All intermediate and final representations are maintained in draw.io-compatible mxGraph XML, which explicitly encodes blocks, edges, and group relationships. Each edge stores `source` and `target` references, allowing connectors to update when blocks move. This enables direct editing of the parsed X , styled $\hat{X}$, and final X^* without regenerating the entire diagram, while also supporting more reliable critic checks of structure, style, and connectivity, as illustrated in Fig. 5.

4 EXPERIMENTS

Implementation Details. All agents (Parse, Style, Layout, and their Critic Agents) are built on Gemini 3.1 Pro Preview. Draw.io-compatible mxGraph XML serves as the unified intermediate representation, and the draw.io CLI renders it as PNG at each stage for Critic visual comparison. The Parse, Style, and Layout stages run for at most 3, 2, and 5 iterations, respectively, with early termination once the Critic issues a passing judgment. Full agent prompts are listed in Appendix G.

4.1 EXPERIMENTAL SETUP

We introduce FLOWCHARTRELAYOUTBENCH, a benchmark pairing 100 source flowcharts at five target ratios with a four-metric VLM-as-a-Judge protocol under hierarchical scoring.

Dataset. The dataset comprises 100 flowcharts from oral-level and above papers at top-tier AI/CV venues over the past three years: ECCV (30), CVPR (30), NeurIPS (12), ICLR (10), ICCV (9), and

Table 2: **Quantitative comparison on FLOWCHARTRELAYOUTBENCH.** Five methods across three families are evaluated under Correctness, Visual Quality, and Overall, a hierarchical score prioritizing Content Fidelity over Visual Quality. Our method achieves the best Correctness metrics and Overall score (81.85, $1.15\times$ the next-best). PaperBanana ranks best on Layout despite weak correctness, while Nano Banana Pro and GPT Image 2.0 rank well on Style by largely preserving the original appearance. **Bold** = best, underline = second-best, *italic* = third-best.

Method	Correctness (%) $\uparrow$			Visual Quality $\downarrow$		Overall $\uparrow$
	Relationship	Hallu.-free	Content	Layout	Style	
<i>Image-to-image</i>						
Nano Banana Pro	49.8	69.4	41.4	2.85	1.35	71.10
GPT Image 2.0	<u>50.2</u>	<u>75.4</u>	40.2	3.17	<u>2.08</u>	<u>71.10</u>
<i>T2I / agentic</i>						
PaperBanana (Zhu et al., 2026a)	38.4	18.6	11.2	2.14	4.34	39.05
<i>Parse-then-render</i>						
AutoFigure-Edit (Lin et al., 2026)	41.8	41.4	24.8	3.63	4.16	47.90
Ours	74.2	90.6	68.6	<u>2.66</u>	2.98	81.85

ICML (9). To cover heterogeneous source-diagram structures, we deliberately curate examples spanning three predefined structural-complexity levels: 25 easy, 40 medium, and 35 hard flowcharts. The benchmark contains 15.5 nodes and 13.6 edges per figure on average, with both quantities generally increasing with structural complexity. Detailed definitions, statistics, and performance breakdowns for the three levels are provided in Appendix A. Each source is evaluated at five baseline-supported aspect ratios (9:16, 2:3, 1:1, 3:2, 16:9), yielding 500 relay layout tasks.

Evaluation Metrics. We adopt a VLM-as-a-Judge protocol for reference-based evaluation. For each sample, the judge model compares the relay layout result against the original flowchart under the target canvas size, and assesses whether the candidate preserves the original structure, content, layout adaptation, and visual style (Appendix H.1, H.2, H.3, and H.4). We independently validate agreement between these VLM judgments and human assessments in Sec. 4.4.

Evaluation Dimensions. Inspired by PaperBanana’s evaluation protocol (Zhu et al., 2026a), we evaluate relay layout results from two perspectives: **Content Fidelity** and **Visual Quality**.

- **Content Fidelity.** Content Fidelity has two binary checks. **Relationship Preservation** verifies that connector logic (source, target, and flow direction) matches the original. **Hallucination-free Rate** checks that no elements are added or omitted. Each is pass/fail; the score is the pass ratio.
- **Visual Quality.** Visual Quality contains two ranking-based metrics. **Layout Quality** ranks valid candidates by canvas utilization and overall arrangement, while penalizing trivial scaling, stretching, or simply rotating a landscape layout to fit a portrait canvas. **Style Similarity** ranks by preservation of original block colors, text styles, and connector styles. The judge jointly ranks all methods per sample; we report the average rank (lower is better).

Hierarchical Scoring. Hierarchical scoring prioritizes content correctness over visual quality. Candidates are first ranked by the number of passed Content Fidelity checks, with two passes ranked above one pass and one pass above none. Ties are then ordered by the combined Layout Quality and Style Similarity. Finally, rank k among N candidates is mapped to $(N - k)/(N - 1) \times 100$.

Baselines. We compare against four baselines in three categories. **Image-to-image:** Nano Banana Pro and GPT Image 2.0 directly generate raster output from the source. **T2I agentic:** PaperBanana (Zhu et al., 2026a), adapted via text descriptions of each source. **Parse-then-render:** AutoFigure-Edit (Lin et al., 2026), with its VLM settings adapted to target the requested ratio (it does not natively support resizing). All baselines are conditioned on the target ratio and source.

4.2 COMPARISONS

Table 2 reports quantitative comparisons against all baselines. Our method achieves the best Relationship Preservation (74.2%), Hallucination-free Rate (90.6%), Content Fidelity (68.6%), and Overall score (81.85), showing stronger structural and content preservation. Qualitative comparisons are shown in Fig. 6. For more visual results, please refer to Appendix F.

Content Fidelity. I2I models often preserve relationships through padding or stretching, but can still distort or hallucinate elements. AutoFigure-Edit performs worse because its SVG lacks explicit

Ratio	Original flowchart	Nano Banana Pro	GPT Image 2.0	PaperBanana	AutoFigure-Edit	Ours
3:2						
1:1						
2:3						

Figure 6: **Qualitative comparison under different target aspect ratios.** We compare our method with four baselines at three target ratios: 1:1, 2:3, and 3:2. **GPT Image 2.0** typically compresses or crops the original; **Nano Banana Pro** attempts layout more often but tends to break relationships. **PaperBanana** rotates horizontal layouts to fit portrait canvases, and **AutoFigure-Edit** may introduce hallucinated elements or inconsistent relationships. **Ours** preserves relationships, avoids hallucinations, uses the canvas effectively, and produces editable XML. Please zoom in for details.

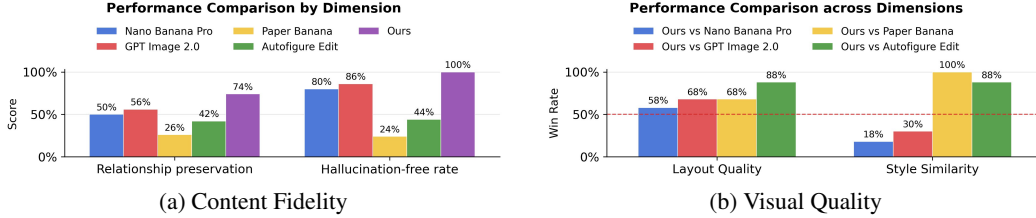


Figure 7: **User study results.** We report human evaluation results for content-related metrics and visual-quality metrics. Our method achieves the best performance on Relationship Preservation and Hallucination-free Rate, and shows strong pairwise win rates in Layout Quality and Style Similarity.

source and target connectivity, while PaperBanana is further affected by hallucination and relationship mismatches from text-driven regeneration.

Visual Quality. I2I models rank better in Style Similarity by largely preserving the original pixels, while our XML reconstruction introduces a modest style gap. PaperBanana ranks best in Layout Quality because its text-driven generation does not preserve the original block geometry or exact connectivity, allowing freer visual arrangement.

Overall. Our method achieves the highest Overall score (81.85), reflecting a better balance between content correctness and visual quality. Baselines with strong visual appearance score lower when content or connectivity is not preserved.

4.3 USER STUDY

Experiment Setup. We conduct a user study on 50 cases, each with one source flowchart and five candidate layouts (ours and four baselines), yielding 250 outputs in total. Each participant evaluates 4 randomly assigned cases, providing binary judgments on Relationship Preservation and Hallucination-free Rate, and ranking candidates 1st–5th for Layout Quality and Style Similarity. Participants are recruited from CS backgrounds, many with CV/ML expertise; detailed criteria reduce inter-annotator variability.

Result Analysis. We collect 600 image-level evaluations from 30 participants (Fig. 7). Our method performs best on Relationship Preservation, Hallucination-free Rate, and Layout Quality, while I2I baselines remain stronger in Style Similarity. Despite their near-verbatim appearance preservation, users still find our editable XML reconstruction visually competitive.

4.4 AGREEMENT BETWEEN USER STUDY AND VLM-AS-A-JUDGE

Since our benchmark relies on VLM-as-a-Judge, we evaluate its agreement with human judgments from the user study using Phi coefficient for binary metrics and Spearman’s rank correlation for ranking-based metrics (Table 3).

Table 3: **Agreement between VLM-as-a-Judge and human evaluation.** We report Phi coefficient (ϕ) and classification agreement for binary Relationship Preservation and Hallucination-free judgments, and Spearman’s rank correlation (ρ) for Layout Quality and Style Similarity. All correlations are significant at $p < 0.001$.

Metric	Statistic	Corr.	Agreement	95% CI
Relationship	ϕ	0.671	83.2%	[0.560, 0.753]
Hallucination	ϕ	0.593	82.0%	[0.486, 0.693]
Layout	ρ	0.620	–	[0.513, 0.714]
Style	ρ	0.757	–	[0.704, 0.807]

Table 4: **Quantitative ablation study on 30 flowcharts.** We compare direct prompting, Stage/Critic removal, and Graphviz DOT replacement. Layout, Style, and Overall are computed jointly within the ablation and are therefore not directly comparable with Table 2. **Bold** = best, underline = second-best, *italic* = third-best.

Method	Rel.↑	Hallu.-free↑	Content↑	Layout↓	Style↓	Overall↑
<i>Direct prompting / decomposition</i>						
Direct Prompt Parse Stage	53.3	60.0	33.3	5.00	7.67	50.74
Direct Prompt Layout Stage	<i>70.0</i>	<i>93.3</i>	<i>66.7</i>	<i>4.07</i>	<i>5.03</i>	<i>69.26</i>
Direct Prompt VLM-to-XML (Gemini 3.1 Pro)	43.3	50.0	33.3	5.23	6.87	41.11
Direct Prompt VLM-to-XML (GPT-5.5)	33.3	80.0	30.0	4.97	7.77	49.63
<i>Stage / Critic removal</i>						
w/o All Critic Agents	60.0	80.0	46.7	4.60	5.50	61.85
w/o Parse Critic	<u>73.3</u>	80.0	60.0	4.83	3.83	63.33
w/o Layout Critic	<i>66.7</i>	<i>83.3</i>	60.0	4.77	4.40	60.00
w/o Style Stage	<u>73.3</u>	<u>93.3</u>	<u>70.0</u>	<u>4.33</u>	<u>2.53</u>	<u>76.30</u>
<i>Conventional layout algorithm</i>						
w/ Graphviz (DOT) Layout	43.3	36.7	20.0	6.77	9.67	35.19
<i>Full pipeline</i>						
Ours	76.7	96.7	76.7	3.90	1.73	87.04

4.5 ABLATION STUDY

We conduct quantitative ablations on a complexity-balanced subset of 30 flowcharts, with 10 easy, 10 medium, and 10 hard examples. We examine: (1) multi-stage decomposition versus direct prompting, (2) the contributions of the Style Stage and Critic Agents, and (3) replacing our Layout Stage with a conventional graph-layout algorithm. All variants use the same 30 flowcharts and evaluation protocol. Visual comparisons are provided in Appendix C.

Direct prompting vs. multi-stage decomposition. Replacing the Parse or Layout Stage with direct prompting reduces Content Fidelity from 76.7% to 33.3% and 66.7%, respectively, while one-shot VLM-to-XML generation drops it to 33.3% with Gemini 3.1 Pro and 30.0% with GPT-5.5. The full pipeline also achieves the best Layout and Style ranks, showing that task-specific decomposition improves both structural fidelity and visual quality beyond the underlying VLM alone.

Contribution of Style Stages and Critic Agents. Removing all Critic Agents reduces Content Fidelity from 76.7% to 46.7% and Overall from 87.04 to 61.85. Removing either the Parse or Layout Critic also degrades Content Fidelity, while removing the Style Stage mainly worsens Style Similarity and lowers Overall to 76.30. These results confirm the complementary roles of stage-specific critics in correcting structural and layout errors and of the Style Stage in preserving appearance.

Comparison with conventional graph layout. Replacing our Layout Stage with Graphviz DOT reduces the Overall score. Its topology-driven layout lacks explicit target-canvas awareness, often leaving substantial unused space, and fails to preserve relationships involving container structures.

5 CONCLUSIONS

We present an agentic pipeline for aspect-ratio-adaptive flowchart relay layout, refitting a raster flowchart to an arbitrary target canvas while preserving structure, content, and visual style in a draw.io-editable output. The pipeline decomposes the problem into three stages: Parse, Style, and Layout. Each stage is guarded by a Critic Agent that pairs deterministic verification with VLM reasoning, so connectivity is explicitly checked and prevented from being silently broken. Experiments on FLOWCHARTRELAYOUTBENCH and a user study confirm substantial gains over image-generation and agentic figure-generation baselines, particularly on structural and Content Fidelity. Limitations are discussed in Appendix B.

REFERENCES

- Shai Avidan and Ariel Shamir. Seam carving for content-aware image resizing. In *Seminal graphics papers: pushing the boundaries, volume 2*, pp. 609–617. 2023.
- Jonas Belouadi, Anne Lauscher, and Steffen Eger. Automatizk: Text-guided synthesis of scientific vector graphics with tikz. *arXiv preprint arXiv:2310.00367*, 2023.
- Jonas Belouadi, Simone P Ponzetto, and Steffen Eger. Detikzify: Synthesizing graphics programs for scientific figures and sketches with tikz. *Advances in Neural Information Processing Systems*, 37:85074–85108, 2024.
- Jonas Belouadi, Eddy Ilg, Margret Keuper, Hideki Tanaka, Masao Utiyama, Raj Dabre, Steffen Eger, and Simone Ponzetto. Tikzero: Zero-shot text-guided graphics program synthesis. In *2025 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 17793–17806. IEEE, 2025.
- Nicolas Carion, Laura Gustafson, Yuan-Ting Hu, Shoubhik Debnath, Ronghang Hu, Didac Suris, Chaitanya Ryali, Kalyan Vasudev Alwala, Haitham Khedr, Andrew Huang, et al. Sam 3: Segment anything with concepts. *arXiv preprint arXiv:2511.16719*, 2025.
- Alexandre Carlier, Martin Danelljan, Alexandre Alahi, and Radu Timofte. Deepsvg: A hierarchical generative network for vector graphics animation. *Advances in Neural Information Processing Systems*, 33:16351–16361, 2020.
- Dongping Chen, Ruoxi Chen, Shilin Zhang, Yaochen Wang, Yinuo Liu, Huichi Zhou, Qihui Zhang, Yao Wan, Pan Zhou, and Lichao Sun. Mllm-as-a-judge: Assessing multimodal llm-as-a-judge with vision-language benchmark. In *Forty-first International Conference on Machine Learning*, 2024a.
- Xinyun Chen, Maxwell Lin, Nathanael Schärli, and Denny Zhou. Teaching large language models to self-debug. In *International Conference on Learning Representations*, volume 2024, pp. 8746–8825, 2024b.
- Huai-Hsun Cheng, Siang-Ling Zhang, and Yu-Lun Liu. Stroke of surprise: Progressive semantic illusions in vector sketching. *arXiv preprint arXiv:2602.12280*, 2026.
- Zhiqing Cui, Jiahao Yuan, Hanqing Wang, Yanshu Li, Chenxu Du, and Zhenglong Ding. Draw with thought: Unleashing multimodal reasoning for scientific diagram generation. In *Proceedings of the 33rd ACM International Conference on Multimedia*, pp. 5050–5059, 2025.
- Pritam Deka and Barry Devereux. Flowchart2mermaid: A vision-language model powered system for converting flowcharts into editable diagram code. *arXiv preprint arXiv:2512.02170*, 2025.
- Victor Dibia. Lida: A tool for automatic generation of grammar-agnostic visualizations and info-graphics using large language models. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 3: System Demonstrations)*, pp. 113–126, 2023.
- Sören Domrös, Reinhard von Hanxleden, Miro Spönemann, Ulf Rüegg, and Christoph Daniel Schulze. The eclipse layout kernel. *arXiv preprint arXiv:2311.00533*, 2023.
- Zhifei Dou, Shabnam Hassani, and Ou Wei. Edgeflow: Edge-map augmented vlm-based flowchart processing for industrial requirements engineering. *arXiv preprint arXiv:2605.27332*, 2026.
- Tim Dwyer, Kim Marriott, and Michael Wybrow. Dunnart: A constraint-based network diagram authoring tool. In *International Symposium on Graph Drawing*, pp. 420–431. Springer, 2008.
- Weixi Feng, Wanrong Zhu, Tsu-jui Fu, Varun Jampani, Arjun Akula, Xuehai He, Sugato Basu, Xin Eric Wang, and William Yang Wang. Layoutgpt: Compositional visual planning and generation with large language models. *Advances in Neural Information Processing Systems*, 36: 18225–18250, 2023.
- Emden R Gansner and Stephen C North. An open graph visualization system and its applications to software engineering. *Software: practice and experience*, 30(11):1203–1233, 2000.

- Emden R Gansner, Eleftherios Koutsoufios, Stephen C North, and K-P Vo. A technique for drawing directed graphs. *IEEE transactions on software engineering*, 19(3):214–230, 1993.
- Kanika Goswami, Puneet Mathur, Ryan Rossi, and Franck Dernoncourt. Plotgen: multi-agent llm-based scientific data visualization via multimodal retrieval feedback. In *Companion Proceedings of the ACM on Web Conference 2025*, pp. 1672–1676, 2025.
- Junrong Guo, Shancheng Fang, Yadong Qu, and Hongtao Xie. Seeing is improving: Visual feedback for iterative text layout refinement, 2026a. URL <https://arxiv.org/abs/2603.22187>.
- Ziyi Guo, Zhou Liu, and Wentao Zhang. Paper2sysarch: Structure-constrained system architecture generation from scientific papers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 1996–2006, 2026b.
- Kamal Gupta, Justin Lazarow, Alessandro Achille, Larry S Davis, Vijay Mahadevan, and Abhinav Shrivastava. Layouttransformer: Layout generation and completion with self-attention. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 1004–1014, 2021.
- Yucheng Han, Chi Zhang, Xin Chen, Xu Yang, Zhibin Wang, Gang Yu, Bin Fu, and Hanwang Zhang. Chartllama: A multimodal llm for chart understanding and generation. *arXiv preprint arXiv:2311.16483*, 2023.
- Mengliang He, Jiayi Zeng, Yankai Jiang, Wei Zhang, Zeming Liu, Xiaoming Shi, and Aimin Zhou. Flow2code: Evaluating large language models for flowchart-based code generation capability. In *Findings of the Association for Computational Linguistics: ACL 2025*, pp. 8124–8146, 2025.
- Jane Hoffswell, Wilmot Li, and Zhicheng Liu. Techniques for flexible responsive visualization design. In *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems*, pp. 1–13, 2020.
- Wenyi Hong, Weihang Wang, Qingsong Lv, Jiazheng Xu, Wenmeng Yu, Junhui Ji, Yan Wang, Zihan Wang, Yuxiao Dong, Ming Ding, et al. Cogagent: A visual language model for gui agents. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 14281–14290, 2024.
- Daichi Horita, Naoto Inoue, Kotaro Kikuchi, Kota Yamaguchi, and Kiyoharu Aizawa. Retrieval-augmented layout transformer for content-aware layout generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 67–76, 2024.
- Hsiao Yuan Hsu, Xiangteng He, Yuxin Peng, Hao Kong, and Qing Zhang. Posterlayout: A new benchmark and approach for content-aware visual-textual presentation layout. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 6018–6026, 2023.
- Haixiang Hu, Yaokun Li, Zeyuan Huang, Cangjun Gao, Qiang He, Qingkun Li, Xiaoming Deng, Cuixia Ma, Yu-Kun Lai, Yong-Jin Liu, and Hongan Wang. Diagram2structure: Unlocking llms’ diagram comprehension through diagramdiff, a framework for structuring offline diagrams. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 24395–24404, June 2026.
- Jie Huang, Xinyun Chen, Swaroop Mishra, Huaixiu Steven Zheng, Adams Yu, Xinying Song, and Denny Zhou. Large language models cannot self-correct reasoning yet. In *International conference on learning representations*, volume 2024, pp. 32808–32824, 2024.
- Jing-En Huang, I Fang, Tzuhsuan Huang, Yu-Lun Liu, Chih-Yu Wang, Jun-Cheng Chen, et al. Gen-val: Agentic image data generation and validation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 8786–8795, 2026a.
- Kaiyi Huang, Kaiyue Sun, Enze Xie, Zhenguo Li, and Xihui Liu. T2i-compbench: A comprehensive benchmark for open-world compositional text-to-image generation. *Advances in Neural Information Processing Systems*, 36:78723–78747, 2023.
- Siyuan Huang, Yutong Gao, Juyang Bai, Yifan Zhou, Zi Yin, Xinxin Liu, Rama Chellappa, Chun Pong Lau, Sayan Nag, Cheng Peng, et al. Scifig: Towards automating scientific figure generation. *arXiv preprint arXiv:2601.04390*, 2026b.

- Yupan Huang, Tengchao Lv, Lei Cui, Yutong Lu, and Furu Wei. Layoutlmv3: Pre-training for document ai with unified text and image masking. In *Proceedings of the 30th ACM international conference on multimedia*, pp. 4083–4091, 2022.
- Zheng-Hui Huang, Zhixiang Wang, Jiaming Tan, Ruihan Yu, Yidan Zhang, Bo Zheng, Yulun Liu, Yung-Yu Chuang, and Kaipeng Zhang. Generative world renderer. *arXiv preprint arXiv:2604.02329*, 2026c.
- Naoto Inoue, Kotaro Kikuchi, Edgar Simo-Serra, Mayu Otani, and Kota Yamaguchi. Layoutdm: Discrete diffusion model for controllable layout generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 10167–10176, 2023.
- Shoma Iwai, Atsuki Osanai, Shunsuke Kitada, and Shinichiro Omachi. Layout-corrector: Alleviating layout sticking phenomenon in discrete diffusion model. In *European Conference on Computer Vision*, pp. 92–110. Springer, 2024.
- Dongfu Jiang, Max Ku, Tianle Li, Yuansheng Ni, Shizhuo Sun, Rongqi Fan, and Wenhui Chen. Genai arena: An open evaluation platform for generative models. *Advances in Neural Information Processing Systems*, 37:79889–79908, 2024.
- Zhaoyun Jiang, Jiaqi Guo, Shizhao Sun, Huayu Deng, Zhongkai Wu, Vuksan Mijovic, Zijiang James Yang, Jian-Guang Lou, and Dongmei Zhang. Layoutformer++: Conditional graphic layout generation via constraint serialization and decoding space restriction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 18403–18412, 2023.
- Aniruddha Kembhavi, Mike Salvato, Eric Kolve, Minjoon Seo, Hannaneh Hajishirzi, and Ali Farhadi. A diagram is worth a dozen images. In *European conference on computer vision*, pp. 235–251. Springer, 2016.
- Hyeok Kim, Ryan Rossi, Abhraneel Sarma, Dominik Moritz, and Jessica Hullman. An automated approach to reasoning about task-oriented insights in responsive visualization. *IEEE transactions on visualization and computer graphics*, 28(1):129–139, 2021.
- Hyeok Kim, Ryan Rossi, Fan Du, Eunye Koh, Shunan Guo, Jessica Hullman, and Jane Hoffswell. Cicero: A declarative grammar for responsive visualization. In *Proceedings of the 2022 CHI Conference on Human Factors in Computing Systems*, pp. 1–15, 2022.
- Hyeok Kim, Ryan Rossi, Jessica Hullman, and Jane Hoffswell. Dupo: A mixed-initiative authoring tool for responsive visualization. *IEEE Transactions on Visualization and Computer Graphics*, 30(1):934–943, 2023.
- Max Ku, Tianle Li, Kai Zhang, Yujie Lu, Xingyu Fu, Wenwen Zhuang, and Wenhui Chen. Imagenhub: Standardizing the evaluation of conditional image generation models. *arXiv preprint arXiv:2310.01596*, 2023.
- Hsin-Ying Lee, Lu Jiang, Irfan Essa, Phuong B Le, Haifeng Gong, Ming-Hsuan Yang, and Weiling Yang. Neural design network: Graphic layout generation with constraints. In *European conference on computer vision*, pp. 491–506. Springer, 2020.
- Kenton Lee, Mandar Joshi, Iulia Raluca Turc, Hexiang Hu, Fangyu Liu, Julian Martin Eisenschlos, Urvashi Khandelwal, Peter Shaw, Ming-Wei Chang, and Kristina Toutanova. Pix2struct: Screenshot parsing as pretraining for visual language understanding. In *International Conference on Machine Learning*, pp. 18893–18912. PMLR, 2023a.
- Seongyun Lee, Seungone Kim, Sue Park, Geewook Kim, and Minjoon Seo. Prometheus-vision: Vision-language model as a judge for fine-grained evaluation. In *Findings of the Association for Computational Linguistics: ACL 2024*, pp. 11286–11315, 2024.
- Tony Lee, Michihiro Yasunaga, Chenlin Meng, Yifan Mai, Joon Sung Park, Agrim Gupta, Yunzhi Zhang, Deepak Narayanan, Hannah Teufel, Marco Bellagente, et al. Holistic evaluation of text-to-image models. *Advances in Neural Information Processing Systems*, 36:69981–70011, 2023b.

- Elad Levi, Eli Brosh, Mykola Mykhailych, and Meir Perez. Dlt: Conditioned layout generation with joint discrete-continuous diffusion layout transformer. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 2106–2115, 2023.
- Fengheng Li, An Liu, Wei Feng, Honghe Zhu, Yaoyu Li, Zheng Zhang, Jingjing Lv, Xin Zhu, Junjie Shen, Zhangang Lin, et al. Relation-aware diffusion model for controllable poster layout generation. In *Proceedings of the 32nd ACM International Conference on Information and Knowledge Management*, pp. 1249–1258, 2023.
- Lei Li, Yuanheng Wei, Zhihui Xie, Xuqing Yang, Yifan Song, Peiyi Wang, Chenxin An, Tianyu Liu, Sujian Li, Bill Yuchen Lin, et al. VI-rewardbench: a challenging benchmark for vision-language generative reward models. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pp. 24657–24668, 2025.
- Chumeng Liang and Jiaxuan You. Diagrameval: Evaluating llm-generated diagrams via graphs. *arXiv preprint arXiv:2510.25761*, 3, 2025.
- Jiawei Lin, Jiaqi Guo, Shizhao Sun, Weijiang Xu, Ting Liu, Jian-Guang Lou, and Dongmei Zhang. A parse-then-place approach for generating graphic layouts from textual descriptions. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 23622–23631, 2023a.
- Jiawei Lin, Jiaqi Guo, Shizhao Sun, Zijiang Yang, Jian-Guang Lou, and Dongmei Zhang. Layout-prompter: Awaken the design ability of large language models. *Advances in Neural Information Processing Systems*, 36:43852–43879, 2023b.
- Zhen Lin, Qiujie Xie, Minjun Zhu, Shichen Li, Qiyao Sun, Enhao Gu, Yiran Ding, Ke Sun, Fang Guo, Panzhong Lu, et al. Autofigure-edit: Generating editable scientific illustration. *arXiv preprint arXiv:2603.06674*, 2026.
- Can Liu, Sizhe Cheng, Feng Liang, Zhibang Jiang, Huang Lingru, Kavinda Athapaththu, and Yong Wang. Proteus: Shapeshifting desktop visualizations for mobile via multi-level intelligent adaptation. In *Proceedings of the 2026 Designing Interactive Systems Conference*, pp. 4874–4891, 2026a.
- Huanyu Liu, Jianfeng Cai, Tingjia Zhang, Hongsheng Li, Siyuan Wang, Guangming Zhu, Syed Afaq Ali Shah, Mohammed Bennamoun, and Liang Zhang. Flowmind2digital: The first comprehensive flowmind recognition and conversion approach. *arXiv preprint arXiv:2401.03742*, 2024.
- Yang Liu, Dan Iter, Yichong Xu, Shuohang Wang, Ruochen Xu, and Chenguang Zhu. G-eval: Nlg evaluation using gpt-4 with better human alignment. In *Proceedings of the 2023 conference on empirical methods in natural language processing*, pp. 2511–2522, 2023.
- Yepeng Liu, Dasen Dai, Chengzhi Liu, Yiren Song, Hai Ci, Yu Zhang, Qi Zhang, Mike Zheng Shou, Xin Eric Wang, and Yuheng Bu. Figures as programs: Recursive generation of editable scientific figures, 2026b. URL <https://arxiv.org/abs/2609.01006>.
- Chiyu Ma, Enpei Zhang, Yilun Zhao, Wenjun Liu, Yaning Jia, Peijun Qing, Lin Shi, Arman Cohan, Yujun Yan, and Soroush Vosoughi. Judging with many minds: Do more perspectives mean less prejudice? on bias amplifications and resistance in multi-agent based llm-as-judge. *arXiv preprint arXiv:2505.19477*, 2025.
- Lev Nachmanson, George Robertson, and Bongshin Lee. Drawing graphs with glee. In *International Symposium on Graph Drawing*, pp. 389–394. Springer, 2007.
- Huitong Pan, Qi Zhang, Cornelia Caragea, Eduard Dragut, and Longin Jan Latecki. Flowlearn: Evaluating large vision-language models on flowchart understanding. In *ECAI 2024: 27th European Conference on Artificial Intelligence, 19–24 October 2024, Santiago de Compostela, Spain–Including 13th Conference on Prestigious Applications of Intelligent Systems (PAIS 2024)*, pp. 73–80. SAGE Publications Pvt. Ltd 1 Oliver’s Yard, 55 City Road, London, EC1Y 1SP, 2024.
- Wei Pang, Kevin Qinghong Lin, Xiangru Jian, Xi He, and Philip Torr. Paper2poster: Towards multimodal poster automation from scientific papers. *arXiv preprint arXiv:2505.21497*, 2025.

- Jorge Poco and Jeffrey Heer. Reverse-engineering visualizations: Recovering visual encodings from chart images. In *Computer graphics forum*, volume 36, pp. 353–363. Wiley Online Library, 2017.
- Pradyumna Reddy, Michael Gharbi, Michal Lukac, and Niloy J Mitra. Im2vec: Synthesizing vector graphics without vector supervision. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 7342–7351, 2021.
- Josselin S Roberts, Tony Lee, Chi H Wong, Michihiro Yasunaga, Yifan Mai, and Percy Liang. Image2struct: Benchmarking structure extraction for vision-language models. *Advances in Neural Information Processing Systems*, 37:115058–115097, 2024.
- Juan A Rodriguez, David Vazquez, Issam Laradji, Marco Pedersoli, and Pau Rodriguez. Figgen: Text to scientific figure generation. *arXiv preprint arXiv:2306.00800*, 2023.
- Juan A Rodriguez, Abhay Puri, Shubham Agarwal, Issam H Laradji, Pau Rodriguez, Sai Rajeswar, David Vazquez, Christopher Pal, and Marco Pedersoli. Starvector: Generating scalable vector graphics code from images and text. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pp. 16175–16186, 2025.
- Michael Rubinstein, Diego Gutierrez, Olga Sorkine, and Ariel Shamir. A comparative study of image retargeting. In *ACM SIGGRAPH Asia 2010 papers*, pp. 1–10. 2010.
- Manolis Savva, Nicholas Kong, Arti Chhajta, Li Fei-Fei, Maneesh Agrawala, and Jeffrey Heer. Revision: Automated classification, analysis and redesign of chart images. In *Proceedings of the 24th annual ACM symposium on User interface software and technology*, pp. 393–402, 2011.
- Bernhard Schäfer and Heiner Stuckenschmidt. Arrow r-cnn for flowchart recognition. In *2019 International Conference on Document Analysis and Recognition Workshops (ICDARW)*, volume 1, pp. 7–13. IEEE, 2019.
- Chenyang Shao, Jiahe Liu, Fengli Xu, and Yong Li. Livefigure: Generating editable scientific illustration with vlm agents. *arXiv preprint arXiv:2605.23527*, 2026.
- Lin Shi, Chiyu Ma, Wenhua Liang, Xingjian Diao, Weicheng Ma, and Soroush Vosoughi. Judging the judges: A systematic study of position bias in llm-as-a-judge. In *Proceedings of the 14th International Joint Conference on Natural Language Processing and the 4th Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics*, pp. 292–314, 2025.
- Noah Shinn, Federico Cassano, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning. *Advances in neural information processing systems*, 36:8634–8652, 2023.
- Shreya Shukla, Prajwal Gatti, Yogesh Kumar, Vikash Yadav, and Anand Mishra. Towards making flowchart images machine interpretable. In *International Conference on Document Analysis and Recognition*, pp. 505–521. Springer, 2023.
- Shubhankar Singh, Purvi Chaurasia, Yerram Varun, Pranshu Pandya, Vatsal Gupta, Vivek Gupta, and Dan Roth. Flowvqa: Mapping multimodal logic in visual question answering with flowcharts. In *Findings of the Association for Computational Linguistics: ACL 2024*, pp. 1330–1350, 2024.
- Tyler Sivertsen, Neal Singh, and James C Davis. Sage: Structured agentic graph editing for software diagrams. *arXiv preprint arXiv:2607.01102*, 2026.
- Xiaoyan Su, Peijie Dong, Zhenheng Tang, Song Tang, Yuyao Zhai, Kaitao Lin, Liang Chen, Gai Yuhang, Yuyu Luo, Qiang Wang, et al. Vcg-bench: Towards a unified visual-centric benchmark for structured generation and editing. *arXiv preprint arXiv:2605.15677*, 2026.
- Kozo Sugiyama, Shojiro Tagawa, and Mitsuhiro Toda. Methods for visual understanding of hierarchical system structures. *IEEE Transactions on Systems, Man, and Cybernetics*, 11(2):109–125, 1981.
- Lianshan Sun, Hanchao Du, and Tao Hou. Fr-detr: End-to-end flowchart recognition with precision and robustness. *IEEE Access*, 10:64292–64301, 2022.

- Li-Zhong Szu-Tu, Ting-Lin Wu, Chia-Jui Chang, He Syu, and Yu-Lun Liu. Beyond memorization: A multi-modal ordinal regression benchmark to expose popularity bias in vision-language models. *arXiv preprint arXiv:2512.21337*, 2025.
- Yinghao Tang, Xueding Liu, Boyuan Zhang, Tingfeng Lan, Yupeng Xie, Jiale Lao, Yiyao Wang, Haoxuan Li, Tingting Gao, Bo Pan, et al. Igenbench: Benchmarking the reliability of text-to-infographic generation. *arXiv preprint arXiv:2601.04498*, 2026.
- Zecheng Tang, Chenfei Wu, Juntao Li, and Nan Duan. Layoutnuwa: Revealing the hidden layout expertise of large language models. *arXiv preprint arXiv:2309.09506*, 2023.
- Tianfu Wang, Leilei Ding, Ziyang Tao, Yi Zhan, Zhiyuan Ma, Wei Wu, Yuxuan Lei, Yuan Feng, Junyang Wang, Yin Wu, et al. Evodiagram: Agentic editable diagram creation via design expertise evolution. *arXiv preprint arXiv:2604.09568*, 2026.
- Jingxuan Wei, Cheng Tan, Qi Chen, Gaowei Wu, Siyuan Li, Zhangyang Gao, Linzhuang Sun, Bihui Yu, and Ruifeng Guo. From words to structured visuals: A benchmark and framework for text-to-diagram generation and editing. In *2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 13315–13325. IEEE, 2025.
- Aoyu Wu, Wai Tong, Tim Dwyer, Bongshin Lee, Petra Isenberg, and Huamin Qu. Mobilevisfixer: Tailoring web visualizations for mobile phones leveraging an explainable reinforcement learning framework. *IEEE Transactions on Visualization and Computer Graphics*, 27(2):464–474, 2020.
- Michael Wybrow, Kim Marriott, and Peter J Stuckey. Orthogonal connector routing. In *International Symposium on Graph Drawing*, pp. 219–231. Springer, 2009.
- Renqiu Xia, Hancheng Ye, Xiangchao Yan, Qi Liu, Hongbin Zhou, Zijun Chen, Botian Shi, Junchi Yan, and Bo Zhang. Chartx & chartvlm: A versatile benchmark and foundation model for complicated chart reasoning. *IEEE Transactions on Image Processing*, 2025.
- Tianyi Xiong, Xiyao Wang, Dong Guo, Qinghao Ye, Haoqi Fan, Quanquan Gu, Heng Huang, and Chunyuan Li. Llava-critic: Learning to evaluate multimodal models. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pp. 13618–13628, 2025.
- Zhengzhuo Xu, Sinan Du, Yiyao Qi, Chengjin Xu, Chun Yuan, and Jian Guo. Chartbench: A benchmark for complex visual reasoning in charts. *arXiv preprint arXiv:2312.15915*, 2023.
- Cheng Yang, Chufan Shi, Yaxin Liu, Bo Shui, Junjie Wang, Mohan Jing, Linran Xu, Xinyu Zhu, Siheng Li, Yuxiang Zhang, et al. Chartmimic: Evaluating llm’s cross-modal reasoning capability via chart-to-code generation. In *International Conference on Learning Representations*, volume 2025, pp. 26590–26646, 2025.
- Zhiyu Yang, Zihan Zhou, Shuo Wang, Xin Cong, Xu Han, Yukun Yan, Zhenghao Liu, Zhixing Tan, Pengyuan Liu, Dong Yu, et al. Matplotlibagent: Method and evaluation for llm-based agentic scientific data visualization. In *Findings of the Association for Computational Linguistics: ACL 2024*, pp. 11789–11804, 2024.
- Michihiro Yasunaga, Luke Zettlemoyer, and Marjan Ghazvininejad. Multimodal reward-bench: Holistic evaluation of reward models for vision language models. *arXiv preprint arXiv:2502.14191*, 2025.
- Jiayi Ye, Yanbo Wang, Yue Huang, Dongping Chen, Qihui Zhang, Nuno Moniz, Tian Gao, Werner Geyer, Chao Huang, Pin-Yu Chen, et al. Justice or prejudice? quantifying biases in llm-as-a-judge. *arXiv preprint arXiv:2410.02736*, 2024.
- Jinze Yu and Dayuan Jiang. Genai-drawio-creator: A framework for automated diagram generation. *arXiv preprint arXiv:2601.05162*, 2026.
- Abhay Zala, Han Lin, Jaemin Cho, and Mohit Bansal. Diagrammergpt: Generating open-domain, open-platform diagrams via llm planning. *arXiv preprint arXiv:2310.12128*, 2023.

- Junyi Zhang, Jiaqi Guo, Shizhao Sun, Jian-Guang Lou, and Dongmei Zhang. Layoutdiffusion: Improving graphic layout generation by discrete diffusion probabilistic models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 7226–7236, 2023.
- Leixin Zhang, Steffen Eger, Yinjie Cheng, Weihe Zhai, Jonas Belouadi, Fahimeh Moafian, and Zhixue Zhao. Scimage: How good are multimodal large language models at scientific text-to-image generation? In *International Conference on Learning Representations*, volume 2025, pp. 6923–6948, 2025.
- Peiying Zhang, Nanxuan Zhao, Matthew Fisher, Yiran Xu, Jing Liao, and Difan Liu. Duetsvg: Unified multimodal svg generation with internal visual guidance. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 10219–10229, June 2026a.
- Tong Zhang, Honglin Lin, Zhou Liu, Chong Chen, and Wentao Zhang. SciFlow-bench: Evaluating structure-aware scientific diagram generation via inverse parsing. In Maria Liakata, Viviane P. Moreira, Jiajun Zhang, and David Jurgens (eds.), *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 17747–17765, San Diego, California, United States, July 2026b. Association for Computational Linguistics. ISBN 979-8-89176-390-6. doi: 10.18653/v1/2026.acl-long.807. URL <https://aclanthology.org/2026.acl-long.807/>.
- Haozhe Zhao, Shuzheng Si, Zhenhailong Wang, Zheng Wang, Liang Chen, Xiaotong Li, Zhixiang Liang, Maosong Sun, and Minjia Zhang. Crafter: A multi-agent harness for editable scientific figure generation from diverse inputs. *arXiv preprint arXiv:2605.30611*, 2026.
- Hao Zheng, Xinyan Guan, Hao Kong, Wenkai Zhang, Jia Zheng, Weixiang Zhou, Hongyu Lin, Yaojie Lu, Xianpei Han, and Le Sun. Pptagent: Generating and evaluating presentations beyond text-to-slides. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pp. 14413–14429, 2025.
- Hao Zheng, Guozhao Mo, Xinru Yan, Qianhao Yuan, Wenkai Zhang, Xuanang Chen, Yaojie Lu, Hongyu Lin, Xianpei Han, and Le Sun. Deeppresenter: Environment-grounded reflection for agentic presentation generation. *arXiv preprint arXiv:2602.22839*, 2026.
- Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric Xing, et al. Judging llm-as-a-judge with mt-bench and chatbot arena. *Advances in neural information processing systems*, 36:46595–46623, 2023.
- Dawei Zhu, Rui Meng, Yale Song, Xiyu Wei, Sujian Li, Tomas Pfister, and Jinsung Yoon. Paperbanana: Automating academic illustration for ai scientists. *arXiv preprint arXiv:2601.23265*, 2026a.
- Minjun Zhu, Zhen Lin, Yixuan Weng, Panzhong Lu, Qiujie Xie, Yifan Wei, Sifan Liu, Qiyao Sun, and Yue Zhang. Autofigure: Generating and refining publication-ready scientific illustrations. *arXiv preprint arXiv:2602.03828*, 2026b.

APPENDIX OVERVIEW

This appendix provides additional details on benchmark construction, limitations, ablation studies, open-weight model transfer, style transfer, qualitative results, and implementation. We also provide an interactive HTML viewer showcasing baseline comparisons and layouts at arbitrary aspect ratios.

Appendix A defines the easy, medium, and hard structural-complexity levels used to construct FLOWCHARTRELAYOUTBENCH, reports node and edge statistics, and provides performance breakdowns across the three levels. Appendix B discusses limitations of the current method across style fidelity, VLM dependency, convergence, edge routing, and runtime cost. Appendix C provides qualitative comparisons complementing the quantitative ablation study in Section 4.5, visualizing representative ablation variants and the conventional Graphviz DOT layout. Appendix D evaluates model transfer by replacing the proprietary VLM with an open-weight Qwen model and compares the full pipeline against direct XML generation and Qwen-based image editing. Appendix E presents our optional reference-guided style transfer extension and qualitative examples. Appendix F presents extended qualitative comparisons of our method against all four baselines across multiple flowchart examples and target aspect ratios. Appendix G provides the implementation prompts used by all six pipeline agents, while Appendix H provides the prompts used by the four VLM-based benchmark evaluators.

A BENCHMARK STRUCTURAL COMPLEXITY

We deliberately curate FLOWCHARTRELAYOUTBENCH to cover source flowcharts with different levels of structural complexity. Rather than defining complexity only by diagram size, we consider how clearly diagram components and their relationships can be recovered from the raster input. We use three predefined levels: easy, medium, and hard.

Easy. Easy flowcharts contain clearly identifiable node boundaries, with connectors terminating unambiguously at their corresponding nodes. Relationships and flow directions are explicitly represented, with little ambiguity in either component identity or connectivity.

Medium. Medium flowcharts retain clear logical relationships, but contain mild visual ambiguity. For example, nodes may have irregular or weakly defined boundaries, or some connectors may be visually abbreviated or omitted while their source, target, and direction remain readily inferable from the surrounding structure.

Hard. Hard flowcharts contain substantial structural ambiguity. Typical cases include dense or crossing connectors, node boundaries that are difficult to delineate, ambiguous logical relationships, or omitted connectors that make source–target relationships or flow directions difficult to infer.

As summarized in Table 5, the final benchmark contains 25 easy, 40 medium, and 35 hard flowcharts. The structural statistics are consistent with increasing complexity: easy, medium, and hard examples contain on average 10.1, 14.3, and 20.8 nodes, respectively, and 9.4, 13.4, and 16.8 edges. Across the full benchmark, flowcharts contain 15.5 nodes and 13.6 edges on average. These statistics provide an additional quantitative characterization of the structural diversity represented in the benchmark.

A.1 PERFORMANCE BY STRUCTURAL COMPLEXITY

We additionally evaluate all methods separately on the easy, medium, and hard subsets to examine how source-diagram complexity affects layout performance. As shown in Table 5, Relationship Preservation and Content Fidelity generally decrease as structural complexity increases, indicating that the three subsets represent progressively more challenging cases. Our method achieves the highest Relationship Preservation, Hallucination-free Rate, Content Fidelity, and Overall score at every complexity level, while maintaining a lead of more than 20 percentage points in Content Fidelity over the next-best method across all three subsets.

Table 5: **Performance across source-diagram structural complexity.** Results are reported on the easy, medium, and hard subsets of FLOWCHARTRELAYOUTBENCH. Overall follows the hierarchical scoring in Table 2. Our method achieves the highest Content Fidelity and Overall score at all three complexity levels. **Bold** = best, underline = second-best, and *italic* = third-best within each level.

Complexity	Method	Correctness (%) $\uparrow$			Visual Quality $\downarrow$		Overall $\uparrow$
		Relationship	Hallu.-free	Content	Layout	Style	
Easy Nodes: 10.1 $\pm$ 3.4 Edges: 9.4 $\pm$ 3.3	Nano Banana Pro	62.4	77.6	56.0	2.78	1.54	69.40
	GPT Image 2.0	66.4	83.2	56.8	3.01	2.09	70.00
	PaperBanana	52.0	25.6	18.4	2.36	4.50	33.20
	AutoFigure-Edit	61.6	48.8	39.2	3.62	3.88	45.00
	Ours	93.6	98.4	92.8	<u>2.46</u>	2.86	80.60
Medium Nodes: 14.3 $\pm$ 6.5 Edges: 13.4 $\pm$ 7.4	Nano Banana Pro	48.0	72.0	39.0	2.86	1.24	71.50
	GPT Image 2.0	<u>52.5</u>	<u>77.5</u>	<u>41.0</u>	3.17	<u>2.08</u>	<u>73.25</u>
	PaperBanana	43.5	18.5	10.0	2.08	4.33	41.63
	AutoFigure-Edit	39.0	42.0	23.5	3.65	4.23	46.25
	Ours	70.0	87.5	62.5	<u>2.68</u>	<u>3.03</u>	79.75
Hard Nodes: 20.8 $\pm$ 11.3 Edges: 16.8 $\pm$ 8.0	Nano Banana Pro	42.9	60.6	<u>33.7</u>	2.90	1.34	<u>71.86</u>
	GPT Image 2.0	<u>36.0</u>	67.4	<u>27.4</u>	3.29	2.08	<u>69.43</u>
	PaperBanana	22.9	<u>13.7</u>	7.4	2.05	4.25	40.29
	AutoFigure-Edit	30.9	35.4	16.0	3.63	4.29	51.86
	Ours	65.1	88.6	58.3	<u>2.79</u>	<u>3.01</u>	85.14

Table 6: **Refinement Iterations by Structural Complexity.** Average refinement iterations (mean $\pm$ std.) for the Parse, Style, and Layout stages and the full pipeline. The maximum iteration budgets are 3, 2, and 5, respectively.

Complexity	Parse	Style	Layout	Total
Easy	2.33 $\pm$ 0.80	1.63 $\pm$ 0.48	4.42 $\pm$ 1.088	8.38 $\pm$ 1.68
Medium	2.56 $\pm$ 0.59	1.82 $\pm$ 0.38	4.74 $\pm$ 0.78	9.13 $\pm$ 1.04
Hard	2.65 $\pm$ 0.67	1.81 $\pm$ 0.39	4.89 $\pm$ 0.45	9.35 $\pm$ 0.96

A.2 REFINEMENT ITERATIONS BY STRUCTURAL COMPLEXITY

To examine how structural complexity affects refinement effort, we report the average number of iterations performed by each pipeline stage on the easy, medium, and hard subsets. As shown in Table 6, total iterations increase with structural complexity, from 8.23 for easy to 9.08 for hard examples. The increase is most pronounced in the Layout Stage, while Parse iterations remain relatively stable, suggesting that structural complexity primarily increases the refinement required for spatial rearrangement.

B LIMITATIONS

Style gap. Our XML-based reconstruction framework prioritizes editability over exact pixel preservation, which introduces an inherent visual style gap relative to methods that directly manipulate original image pixels. Although the generated diagrams remain structurally faithful and fully editable, subtle discrepancies in typography, icon rendering, spacing, or low-level visual appearance may still occur. Closing this gap while preserving editable graph structure remains an important direction for future work.

Closed-source VLM dependency. Our main experiments rely on Gemini 3.1 Pro Preview, a proprietary multimodal model, which introduces limitations in reproducibility, accessibility, deployment cost, and privacy-sensitive usage scenarios. Future model updates outside our control may also affect output behavior. In Appendix D, we replace Gemini with the open-weight Qwen3.6-27B model. The proposed pipeline continues to outperform direct generation under the same VLM, but

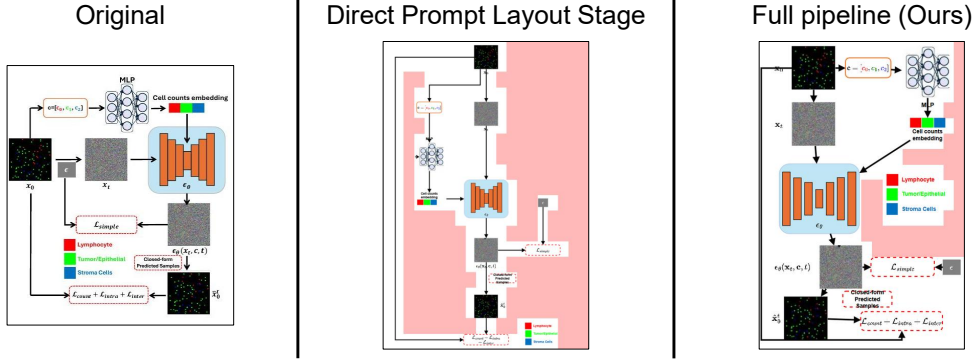


Figure 8: **Direct Prompt Layout Stage.** Direct prompting leaves substantial unused space and adapts to the target canvas by excessively shrinking components. Our method makes more effective use of the available canvas while largely preserving component sizes and maintaining clear connector flow.

its substantially lower absolute structural fidelity shows that current performance remains sensitive to the capability of the underlying model.

Convergence not guaranteed. The proposed critic-guided refinement mechanism is heuristic rather than formally guaranteed. Each stage terminates after either receiving a passing judgment or reaching a fixed maximum number of iterations. Although the deterministic validators substantially reduce structural failures, the overall iterative process does not guarantee convergence or globally optimal layouts. In rare cases, outputs may still contain subtle visual artifacts or aesthetically suboptimal arrangements that are not detected by the VLM critic.

Edge routing failures. Our deterministic checker verifies the integrity of source–target connectivity relationships but does not explicitly optimize edge-routing aesthetics. As a result, diagrams with high node density, complex graph topology, or extreme aspect-ratio transformations may still exhibit unnecessary edge crossings, uneven spacing, or visually unnatural routing despite preserving correct connectivity.

Runtime and API cost. The multi-stage agentic pipeline introduces substantially higher inference cost and latency than direct one-shot generation methods. Each relay layout instance requires approximately 10–20 VLM API calls across the three stages, in addition to one SAM 3 inference pass. Runtime is dominated by remote API latency rather than local computation. While this overhead is manageable for individual editing tasks, reproducing the full benchmark evaluation may require sustained API throughput and incur non-trivial monetary cost under current commercial API pricing.

C QUALITATIVE ABLATION

This section complements the quantitative ablation study in Section 4.5 with representative qualitative comparisons. We visualize direct prompting for the Layout Stage (Fig. 8), removal of the Parse Critic (Fig. 9), removal of the Layout Critic (Fig. 11), removal of the Style Stage (Fig. 10), and replacement of our Layout Stage with Graphviz DOT (Fig. 12). These examples illustrate the characteristic failure modes underlying the quantitative results in Table 4.

D OPEN-WEIGHT VLM TRANSFER

To test whether our pipeline generalizes beyond Gemini 3.1 Pro Preview, we replace the underlying VLM with the open-weight Qwen3.6-27B while keeping the Parse–Style–Layout pipeline unchanged, and compare against direct XML generation using Qwen3.6-27B and direct image editing using Qwen-Image-Edit-2511. As shown in Table 7, despite the lower absolute performance of Qwen3.6-27B, our pipeline outperforms direct XML generation with the same VLM, reducing

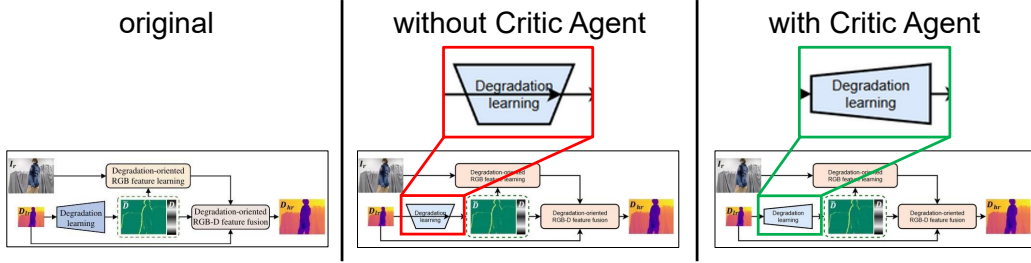


Figure 9: **Without Parse Critic.** Structural errors from the initial parse remain uncorrected, including incorrect shape types and mismatched connector attachment points. Iterative Critic feedback improves both component geometry and edge anchoring.

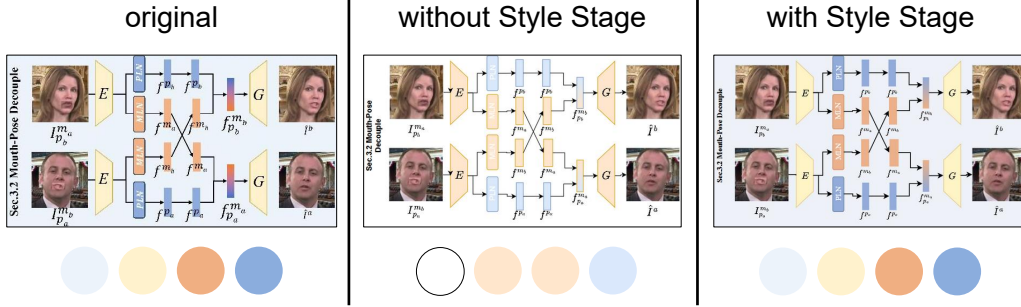


Figure 10: **Without Style Stage.** The reconstructed diagram exhibits mismatched block colors, missing or simplified containers, inconsistent connector styles, and typography differences. The Style Stage substantially improves visual correspondence while preserving the recovered structure.

XML-format failures from 16.0% to 0.0% and improving Content Fidelity from 0.0% to 20.0%. Direct image editing often retains the original elongated layout with limited structural rearrangement while introducing visible artifacts and inconsistencies in text and diagram blocks, as illustrated in Fig. 13. These results indicate that the pipeline transfers across model families, although absolute performance remains dependent on the underlying VLM.

E STYLE TRANSFER

This appendix details the optional reference-guided Style Transfer extension introduced in Section 3.5. Given a completed layout output X^* and an unrelated reference image R , the extension transfers the visual style of R to produce a restyled XML X_R^* without altering structural or semantic content. Because R and X^* have no spatial correspondence, a Color Extraction Tool first quantizes colors in LAB space to obtain separate fill and stroke palettes from R , after which a VLM assigns each palette entry to semantic roles such as background, primary fill, text, and connector color. A Style Agent then iteratively rewrites the style attributes of X^* under Critic Agent feedback, while inferring non-color properties including corner roundness, font family, and arrow style directly from R . A qualitative example is shown in Fig. 14.

F ADDITIONAL VISUAL COMPARISONS

This appendix section extends the main comparison results in Sec. 4.2 with additional qualitative results under five target aspect ratios: 1:1, 2:3, 3:2, 9:16, and 16:9. Each aspect ratio is presented in a separate figure, with the extended comparisons shown in Fig. 15, Fig. 16, Fig. 17, Fig. 18, and Fig. 19. These examples provide more baseline comparisons and further illustrate common failures such as hallucinated elements, stretched or compressed outputs, relationship errors, and broken text/math rendering. Our method consistently better preserves the flowchart structure while adapting to the target canvas in an editable format.

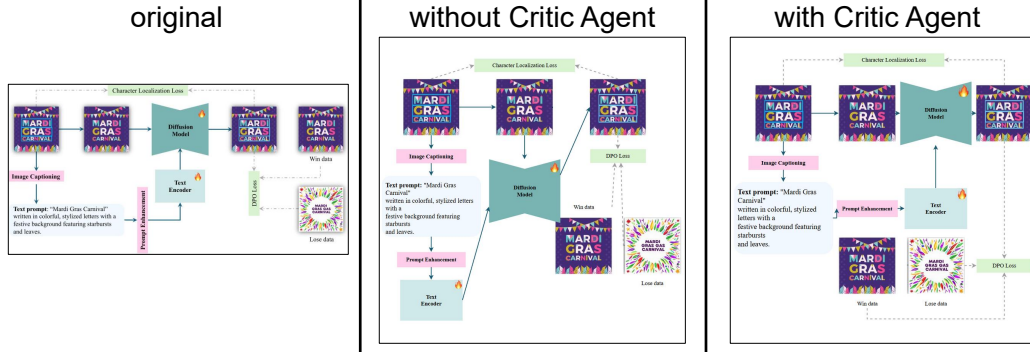


Figure 11: **Without Layout Critic.** The single-pass result exhibits weaker space utilization, less natural arrow routing, and poorer visual balance. Iterative deterministic and visual feedback improves placement, compactness, and readability while preserving connectivity.

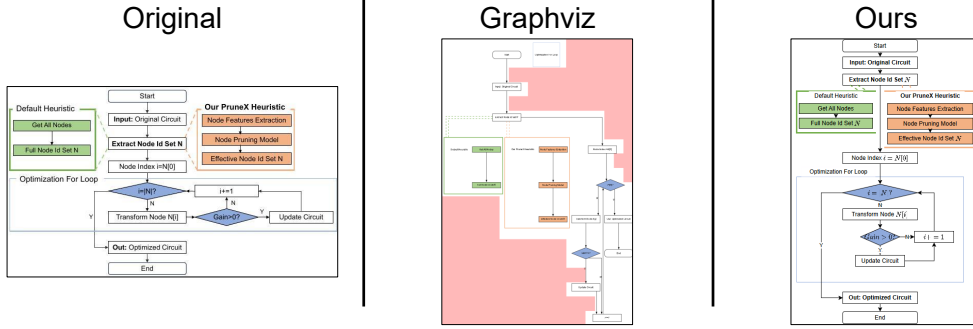


Figure 12: **Replacing Layout Stage with Graphviz DOT.** The topology-driven layout often leaves substantial unused space and may fail to preserve relationships involving container structures. Our Layout Stage better utilizes the target canvas while maintaining these structural relationships.

Table 7: **Transfer to an open-weight VLM.** We replace Gemini 3.1 Pro Preview with Qwen3.6-27B while keeping the proposed pipeline unchanged. Although absolute structural fidelity decreases with the open-weight model, our pipeline substantially improves over direct XML generation using the same VLM and eliminates XML-format failures. Overall is computed within this three-method comparison and is not directly comparable with Overall scores in Tables 2 and 4. **Bold** = best, underline = second-best, *italic* = third-best.

Method	XML Fail↓	Rel.↑	Hallu.-free↑	Content↑	Layout↓	Style↓	Overall↑
Direct VLM-to-XML (Qwen3.6-27B)	16.0	8.0	12.0	0.0	2.36	2.28	38.0
Direct I2I (Qwen-Image-Edit-2511)	0.0	24.0	8.0	<u>8.0</u>	<u>2.16</u>	<u>2.20</u>	<u>40.0</u>
Ours (Qwen3.6-27B)	0.0	<u>20.0</u>	52.0	20.0	1.40	1.44	90.0

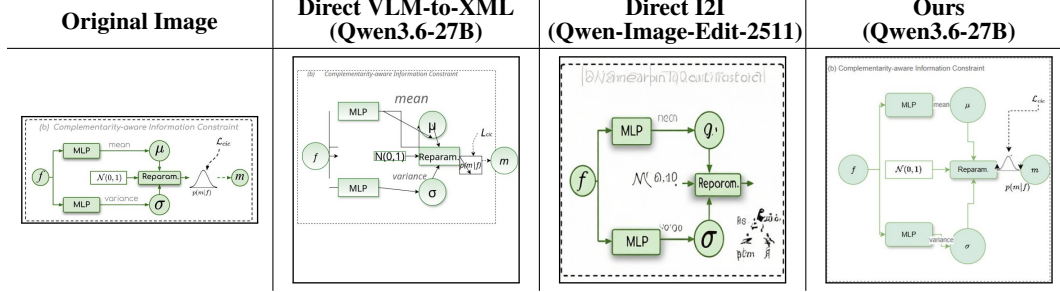


Figure 13: **Qualitative comparison using open-weight Qwen models under the 1:1 target aspect ratio.** Direct VLM-to-XML introduces structural and connectivity errors, including overlapping blocks. Direct I2I preserves most visual elements but exhibits missing components, distorted text, and substantial geometric stretching. Our method instead produces a coherent relayout with less distortion while better preserving the original structure and connectivity.

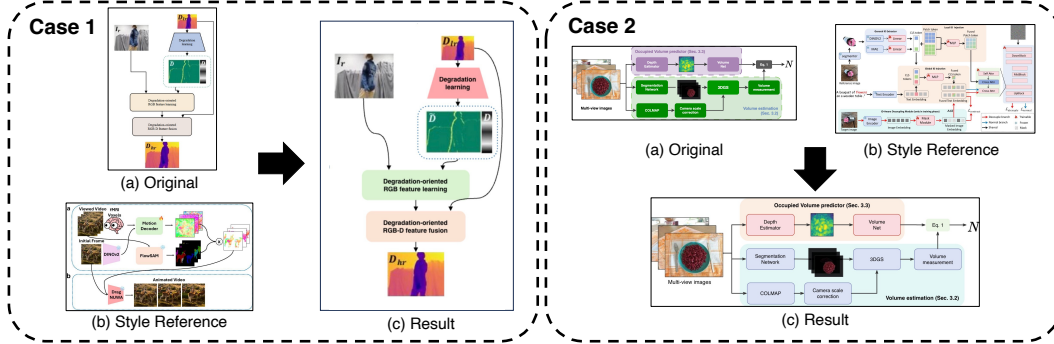


Figure 14: **Style transfer results.** Given a completed relayout (a) and an unrelated reference R (b), our Style Transfer extension produces X_R^* (c) that adopts R 's fill colors, typography, corner style, and connectors while preserving (a)'s block connectivity and semantic content. Colors are transferred via semantic role assignment (background, primary fill, connector) rather than pixel matching, since (a) and R share no spatial correspondence.

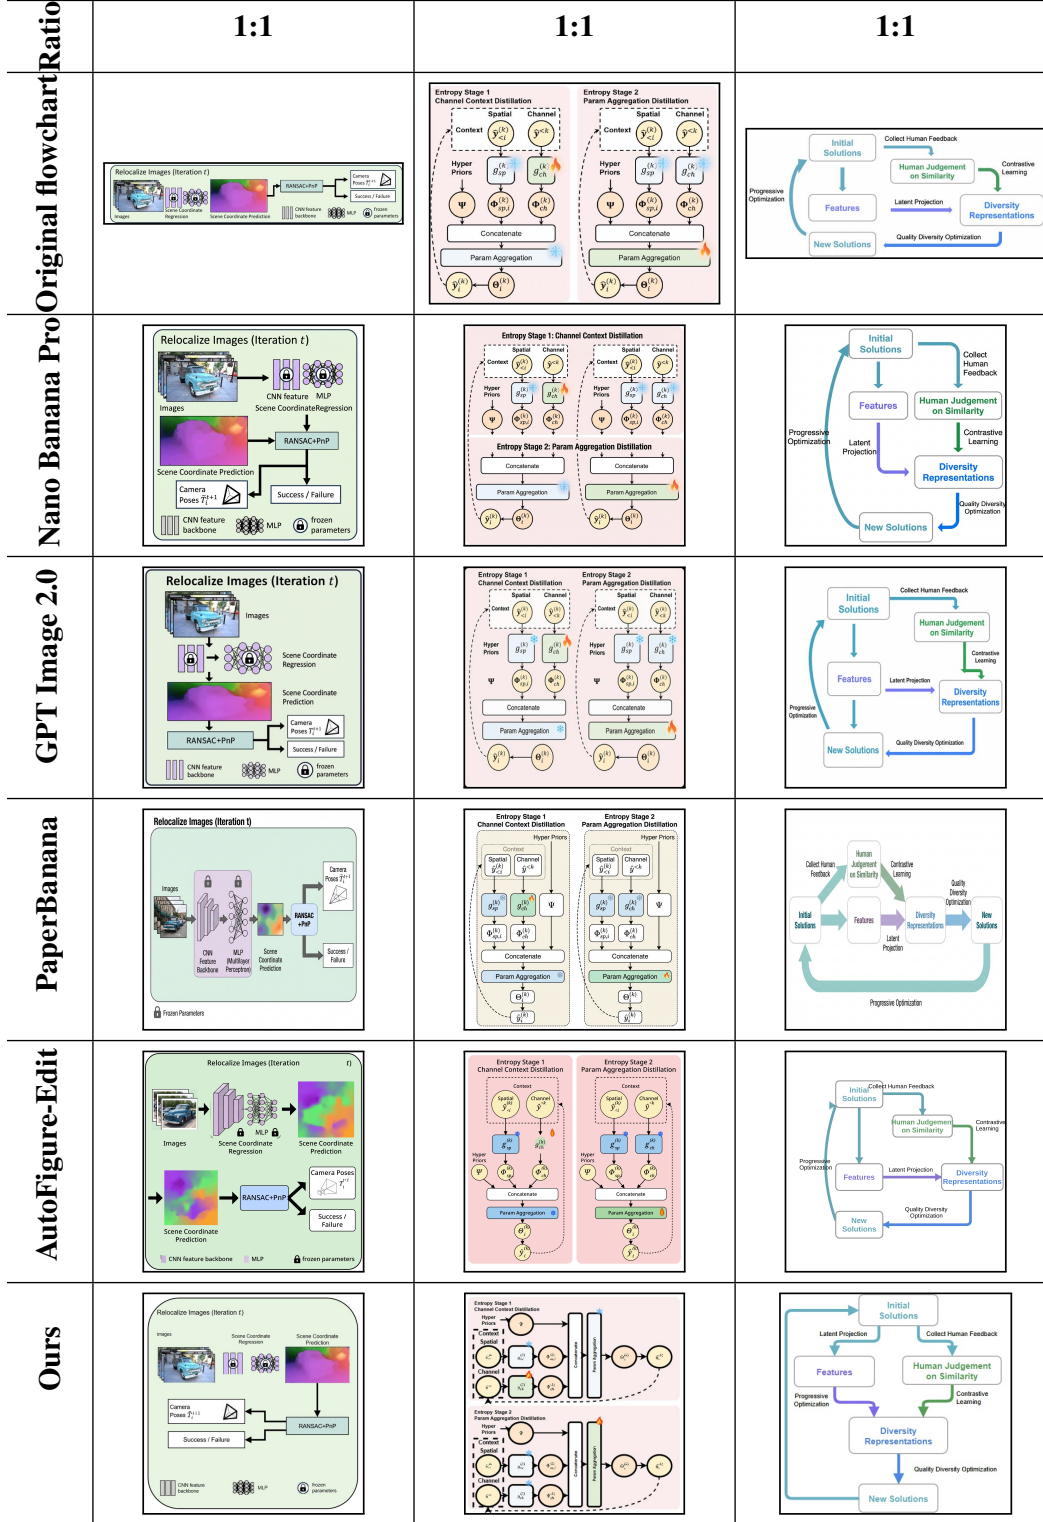


Figure 15: **Additional qualitative comparison under the 1:1 target aspect ratio.** In the left example, Nano Banana Pro and GPT Image 2.0 introduce relationship errors when attempting relay-out. In the middle and right examples, only our method performs clear relay-out, while Nano Banana Pro, GPT Image 2.0, and AutoFigure-Edit mainly rely on stretching, compression, or direct reuse of the original image.

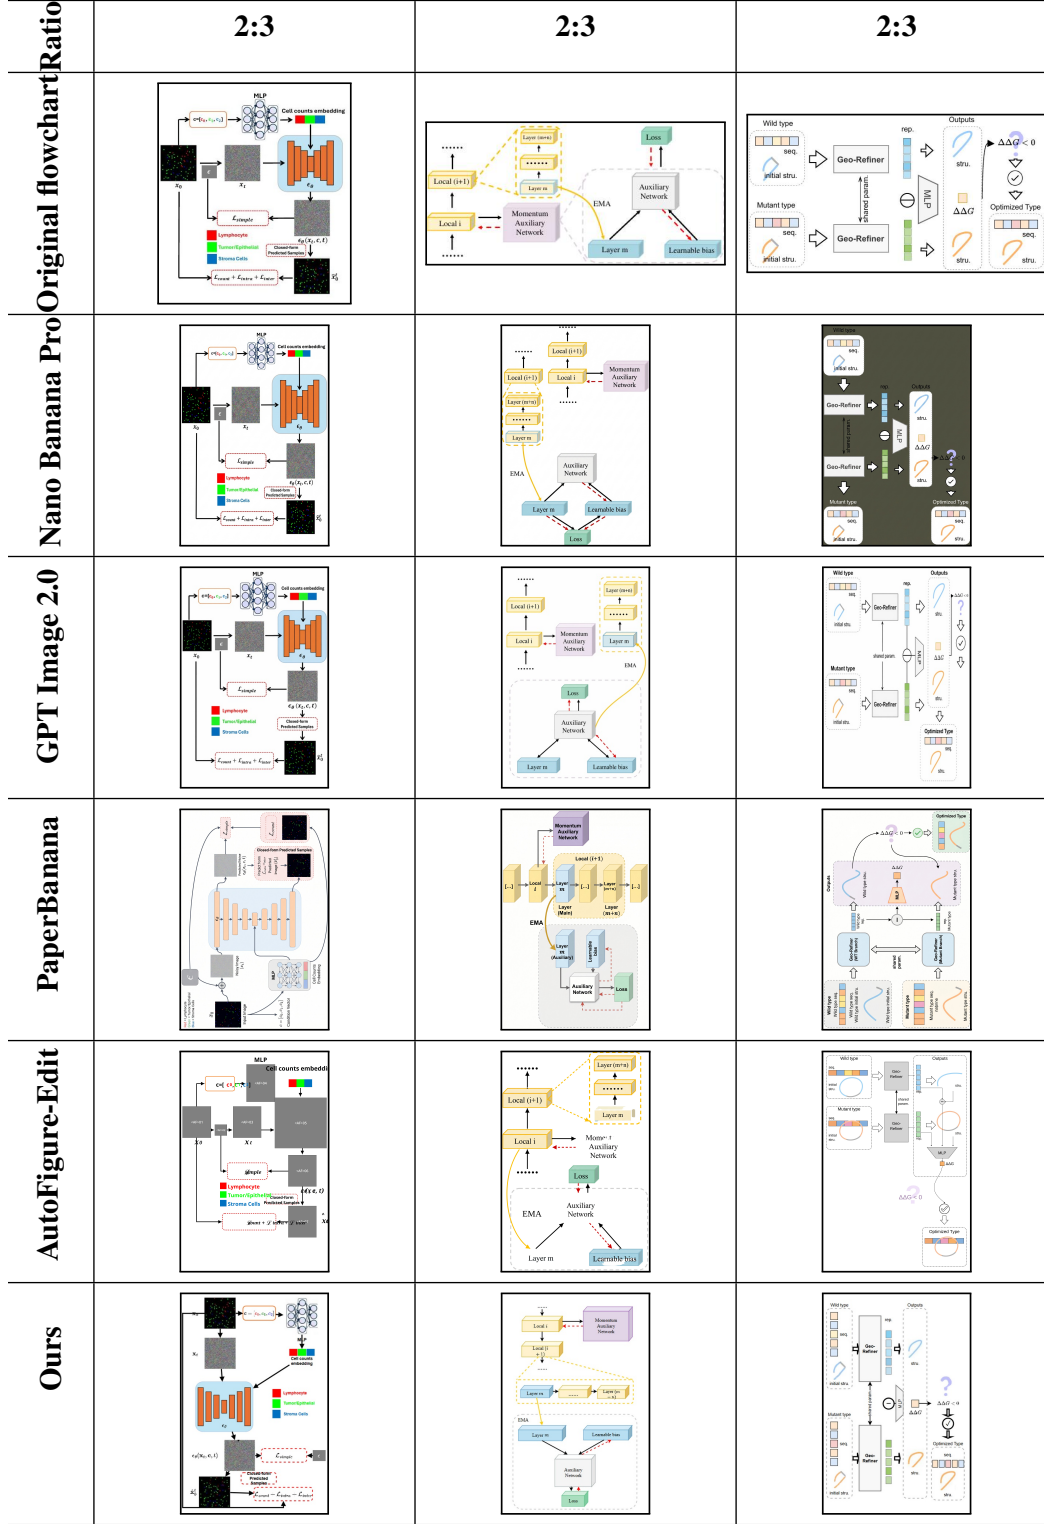


Figure 16: **Additional qualitative comparison under the 2:3 target aspect ratio.** In the left example, Nano Banana Pro and GPT Image 2.0 mostly stretch the original image without meaningful layout. In the middle example, all baselines introduce relationship errors after layout. In the right example, GPT Image 2.0 and AutoFigure-Edit leave large unused space, while PaperBanana rotates a horizontal layout to fit the portrait canvas.

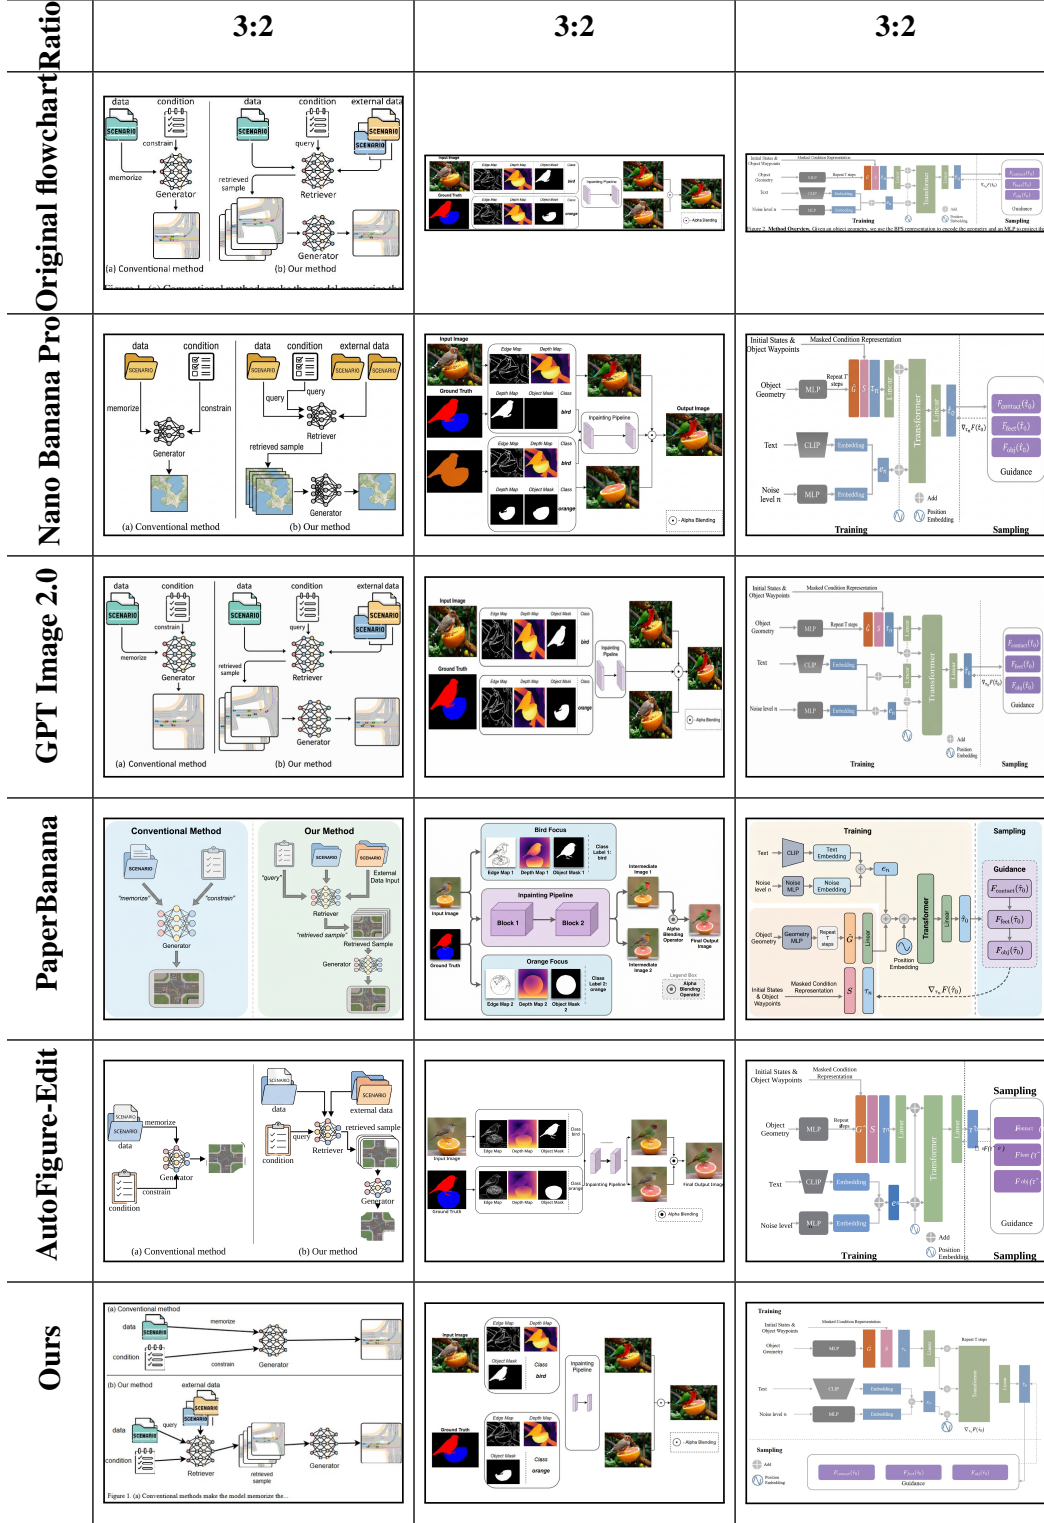


Figure 17: **Additional qualitative comparison under the 3:2 target aspect ratio.** In the left example, Nano Banana Pro and PaperBanana introduce many hallucinated elements, while only our method performs clear relayout. In the middle example, Nano Banana Pro and PaperBanana also hallucinate structures, and AutoFigure-Edit and GPT Image 2.0 leave large unused space. In the right example, Nano Banana Pro, GPT Image 2.0, and AutoFigure-Edit mostly stretch the original image without meaningful relayout.
















Original flowchartRatio	9:16	9:16	9:16
Nano Banana Pro			
GPT Image 2.0			
PaperBanana			
AutoFigure-Edit			
Ours			

Figure 18: **Additional qualitative comparison under the 9:16 target aspect ratio.** In the left example, all four baselines introduce relationship errors, while our method preserves the correct flow structure. In the middle example, Nano Banana Pro introduces relationship errors after relay-out, GPT Image 2.0 mainly stretches the original image, and AutoFigure-Edit leaves large unused space. In the right example, Nano Banana Pro, GPT Image 2.0, and AutoFigure-Edit all produce relationship errors, while PaperBanana rotates a horizontal layout to fit the portrait canvas.

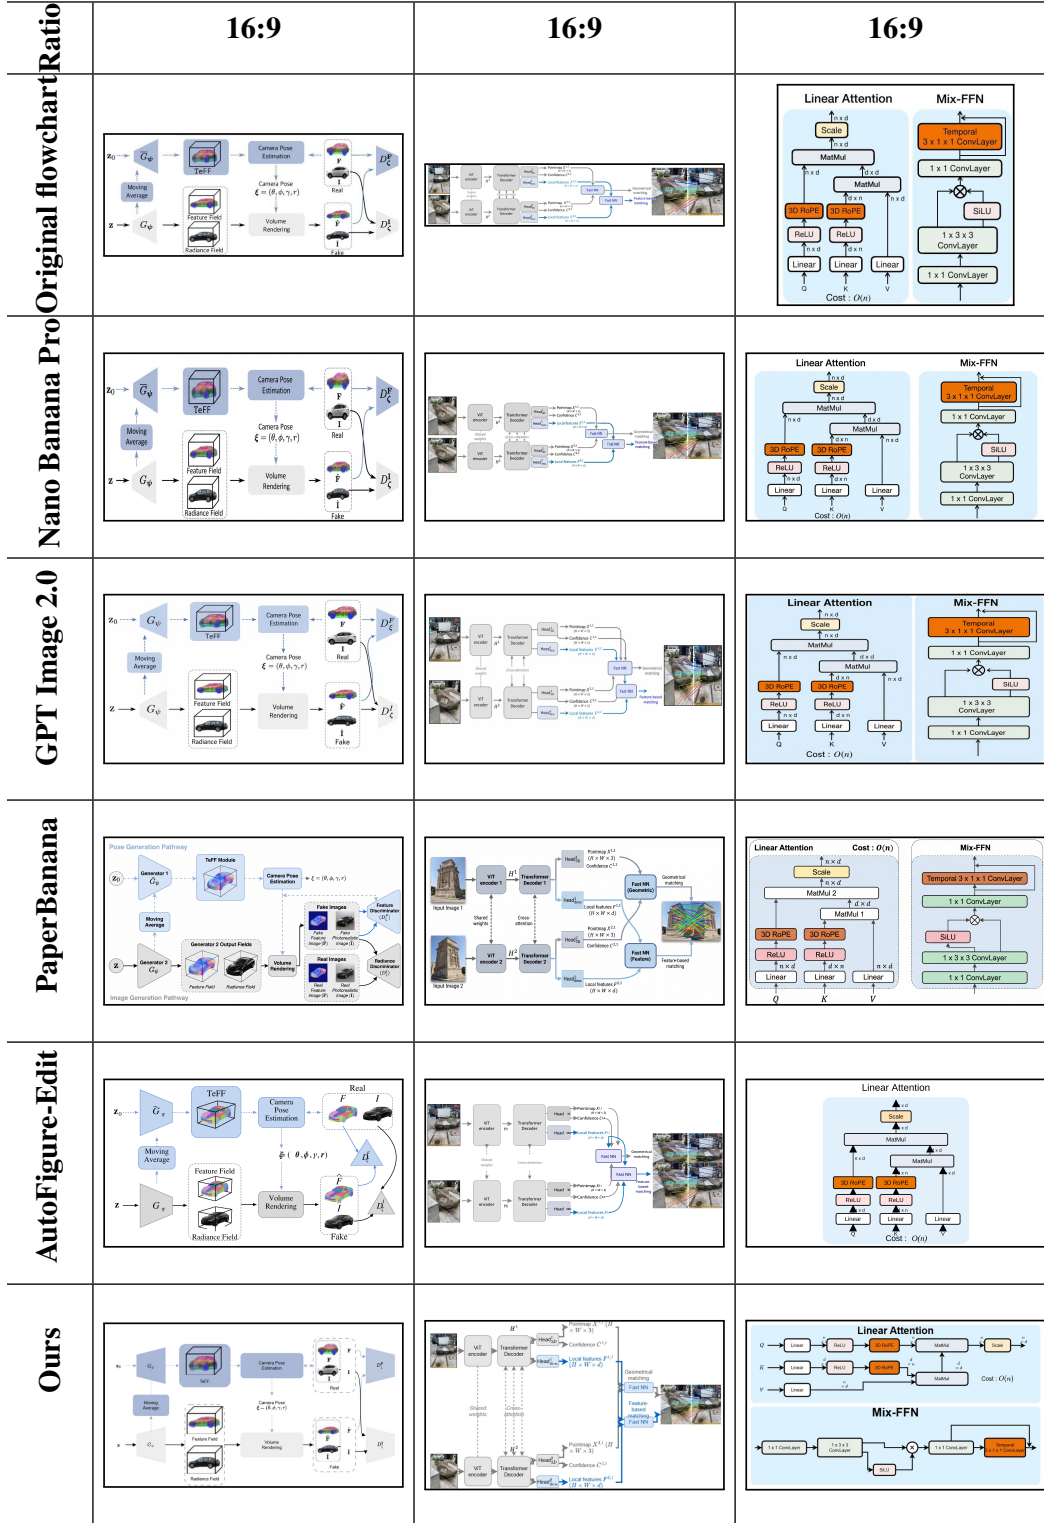


Figure 19: **Additional qualitative comparison under the 16:9 target aspect ratio.** In the left example, Nano Banana Pro and GPT Image 2.0 directly stretch the original image, causing the embedded image blocks to deform, while PaperBanana and AutoFigure-Edit introduce hallucinated elements. In the middle example, Nano Banana Pro, GPT Image 2.0, and AutoFigure-Edit leave large blank regions, while PaperBanana produces many hallucinated structures. In the right example, Nano Banana Pro, GPT Image 2.0, and PaperBanana largely keep the original layout without meaningful relayout, and AutoFigure-Edit leaves large unused space. Only our method performs clear relayout to better adapt the layout to the target canvas.

G PIPELINE AGENT PROMPTS

This section reproduces the implementation prompts and rule text used by the pipeline agents, corresponding to the Parse (Section 3.2), Style (Section 3.3), and Layout (Section 3.4) stages described in the main paper. Minor editorial adjustments were made for readability and presentation consistency.

G.1 PARSE AGENT

```

**Role:**
You are a tool that converts a flowchart image into mxGraphModel XML readable and editable in
draw.io.

**Inputs:**
- Target Diagram: [the provided flowchart image]
- Canvas size: width {width}, height {height}
- previous_XML: {previous_xml}
- previous_suggestions: {feedback}
- bbox_json: {bbox_json}

'bbox_json' is a high-confidence geometric prior. Each object may include: 'type' (rect /
image / polygon), 'x', 'y', 'width', 'height', and 'polyCoords' (for polygon only;
normalized coordinates relative to the object's bounding box). Use bbox_json as the
primary basis for node shapes and '<mxGeometry>' values. If 'previous_suggestions' is non
-empty, apply those corrections first before addressing other issues.

**Task:**
Identify the diagram structure, text, mathematical notation, relationships, groups, and image
placeholders, then output complete draw.io mxGraphModel XML.

**Evaluation Criteria:**
Step 0 --- Coordinate System
Treat the image as a 2D plane with origin (0, 0) at the top-left and ({width}, {height}) at
the bottom-right. For each object: x = xmin, y = ymin, width = xmax - xmin, height = ymax
- ymin. All styles must be written in the 'style="..."' attribute of '<mxCell>'; '<
mxStyle>' child nodes are not permitted.

Step 1 --- Object Detection
Identify all visually distinct objects: blocks, edges, images, curlyBrackets, containers, and
group boundaries.

- Blocks: enclosed by a border or distinct background, containing text or images, with a clear
geometric shape.
- Edges: thin lines, arrows, polylines, or curves connecting two objects.
- CurlyBrackets: brace shapes enclosing a group of objects.

For each object, estimate a bounding box [xmin, ymin, xmax, ymax] that fully encloses the
shape boundary (not just the text inside).

Step 2 --- Block Shape Determination
Determine each block's shape using bbox_json:

- polygon (highest priority): Use 'shape=mxgraph.basic.polygon' with 'polyCoords' taken
directly from bbox_json. Use bbox_json's 'x, y, width, height' for '<mxGeometry>'. Do not
degrade to a rectangle or any other shape.
- rect: Determine the geometric shape from visual appearance --- rectangle, rounded rectangle,
ellipse, rhombus, etc. Use bbox_json's geometry for '<mxGeometry>'.
- image: Gray "IMAGE" blocks, blocks whose style contains image=, or image-placeholder blocks
are stand-ins for source visual content. Image objects should be represented as 'shape=
image' with the placeholder URL 'image=https://placeholder.co/WxH?text="IMAGE"' (W and H
are the node's integer width and height).

If multiple candidate bounding boxes overlap heavily with nearly identical dimensions and
regular offsets, merge them into a single object (layered stack) rather than creating
separate nodes.

Step 3 --- Grouping
Create a Group or Container when multiple blocks form a coherent whole:

- Shared connection target: If an edge points to a shared area of multiple blocks rather than
a single block, create a transparent Group enclosing those blocks ('connectable="1"'),
and connect the edge to the Group.
- Visible enclosure: If blocks share a common outer border, background region, dashed frame,
or colored area, create a Container whose bounding box fully encloses all inner blocks.
- Regular arrangement with shared cues: If blocks are arranged in a stable pattern (column,
row, grid) and share a common title, background, curlyBracket, or edge target, create a
Group.

```



```

- CurlyBracket group: If a curlyBracket encloses a set of blocks, treat those blocks as a
  Group. The curlyBracket's 'direction' is determined solely by its opening direction:
  opening down → 'south'; up → 'north'; left → 'west'; right → 'east'.
- Semantic group: If blocks clearly constitute the same module, phase, subsystem, or input/
  output unit, create a transparent Group even without a visible outer border.

In all cases, inner blocks' 'parent' must point to the Group, and the Group's bounding box
must fully enclose all members.

Step 4 --- Text Extraction and Attribution
Extract all recognizable text and bind each segment to exactly one of the following categories
based on both position and semantics:

- Block interior text: located inside the block and belongs to its content or title.
- Edge label: near an edge, describing the connection, condition, or transition.
- block_external_label: outside a block but semantically names that single block. Create an
  outer group with the block and this text cell as children.
- group_external_title: at the title position of a group/container, naming the whole module or
  phase. Attach as a direct child of the group.
- annotation: independent supplementary text not attached to any block, group, or edge.

Do not leave identified text without a corresponding XML representation. For text outside its
parent's bounding box, use relative coordinates (negative values for above/left, values
exceeding parent dimensions for below/right).

Step 5 --- Mathematical Text
If text contains mathematical symbols, formulas, superscripts, Greek letters, or scientific
notation, treat it as mathematical text:
- Convert to valid LaTeX wrapped in '\\(...\\)' for inline math or '$$...$$' for standalone
  formulas.
- The node's style must include 'html=1;math=1'.
- Use '&#xa;' for line breaks; do not use '<br>'.
- Escape special characters: '<' → '&lt;'; '>' → '&gt;'; '&' → '&amp;'.
- If any mathematical text exists in the diagram, set 'math="1"' on the outermost '<
  mxGraphModel>'.

Step 6 --- Relationship Detection (Edges)
Every edge must have both a 'source' and a 'target'. For each connection:

- Determine which object the arrow departs from and which it points to. A small gap between
  the arrow and a boundary is acceptable if the direction clearly indicates a connection.
- If the arrow points to a shared area rather than a single block, connect to the
  corresponding Group or Container, not to an inner child.
- An edge connects to the object at the same hierarchy level as its endpoint; do not descend
  to a deeper child unless the arrow clearly enters the child's bounding box.
- Path styles: straight line (direct), polyline ('edgeStyle=orthogonalEdgeStyle' with
  waypoints in '<Array as="points">'), or curve ('curved=1').
- Connection sides: use 'exitX', 'exitY', 'entryX', 'entryY'. Defaults (no 'direction'): top =
  (0.5, 0), bottom = (0.5, 1), left = (0, 0.5), right = (1, 0.5).
- Edge labels go directly into the edge's 'value'.

**Output Format:**
Return the complete draw.io XML starting with '<mxGraphModel' and ending with '</mxGraphModel
>'. Include all nodes, edges (with waypoints and connection points), and text. Set '
pageWidth="{width}"' and 'pageHeight="{height}"'. Do not output Markdown code fences, '<
mxfile>' wrappers, or standalone '<style>' tags.

```xml
<mxGraphModel dx="1000" dy="1000" grid="1" gridSize="10" guides="1" tooltips="1" connect="1"
arrows="1" fold="1" page="1" pageScale="1" pageWidth="{width}" pageHeight="{height}" math
="1" shadow="0">
 <root>
 <mxCell id="0"/>
 <mxCell id="1" parent="0"/>
 <!-- nodes and edges -->
 </root>
</mxGraphModel>
```

```

Listing G.1: Parse agent main prompt.

G.2 PARSE CRITIC

```

**Role:**
You are a parse validation and correction suggestion agent.

**Inputs:**
You will receive:

```

```

1. A mxGraphModel XML
2. A reasons list from a programmatic checker
3. A flowchart image exported from that XML
4. The original flowchart image
5. reasons: {reasons}
6. bbox_json: {bbox_json}

**Task:**
Inspect the XML and rendered image against the original flowchart image, then return whether
the parse is acceptable and, if not, provide specific correction suggestions.

**Evaluation Criteria:**
Checks to perform:
1. Verify each block's x, y, width, height against the original image.
2. Check that edge source/target matches the original (which object each arrow connects).
3. Check edge labels for correctness and overlapping.
4. Check that no edges are missing source or target.
5. Check that each edge endpoint connects to the correct object level (Block vs. Group/
Container): an endpoint inside a Container but not entering any child's bounding box
should connect to the Container, not a child block.
6. Check curlyBracket opening directions against the original image.
7. For every [R2] entry in the reasons list, produce a specific correction.

Pass determination:
- Return 'Pass: true' if the reasons list is empty and all checks pass (minor non-readability
issues are acceptable).
- Return 'Pass: false' for any of: [R2] entries present; obvious block size/position
deviations; missing, overlapping, or wrong edge labels; edge source/target inconsistent
with the original.

Suggestion writing rules:
- For block corrections: state which block's x, y, width, or height deviates and by how much,
or what the corrected coordinates should be.
- For group corrections: state which blocks should be grouped, whether the group should be
transparent, which blocks' parent should point to the group, and which edges' source/
target should be re-connected to the group.
- For edge corrections: state the correct source and target IDs; if an edge passes through a
block it should not, specify a detour path with waypoint coordinates and which side of
the block to enter/exit. Prioritize fixing the wrong object-level connection before
adjusting the path.
- For [R2] out-of-canvas corrections: state the block ID, its approximate current x/y/width/
height, which direction it overflows, and how many pixels to shift (or shrink) with the
corrected approximate coordinates. Enlarging the canvas is not permitted.
- For curlyBracket direction: direction is determined only by the opening direction (opening
down → south, up → north, left → west, right → east).

**Output Format:**
Return JSON only. No Markdown fences or other text.

```json
{
 "Pass": true,
 "reasons": [],
 "suggestion": ""
}
```

If 'Pass' is true, 'suggestion' must be an empty string. If 'Pass' is false, 'suggestion' must
be non-empty with specific, actionable fixes for each identified issue.

```

Listing G.2: Parse critic prompt.

G.3 STYLE AGENT

```

**Role:**
You are a draw.io XML style transfer agent.

**Inputs:**
You will receive:
1. The original XML
2. The Style-Reference image
3. The Current render
4. block_color_hints --- per-block color sampling hints, each containing: id, geometry,
region_in_reference, reference_region_dominant_hex, and the current style's fillColor /
strokeColor / fontColor / gradientColor. These are auxiliary hints only; primary judgment
must come from visual comparison of the images.
5. The suggestion from the previous critic round --- apply every suggestion faithfully.

```

```

**Task:**
Without altering structure, text content, or geometry, modify styles in the XML so that the
  Current render's visual appearance more closely matches the Style-Reference.

**Evaluation Criteria:**
Colors
- Use the visually corresponding region in the Style-Reference as the primary basis. Correct
  fillColor / strokeColor / fontColor / gradientColor to match.
- You may refer to 'reference_region_dominant_hex' in block_color_hints as a starting point,
  but always verify against the image.
- If the reference region appears to be primarily text or lines rather than a filled area, do
  not force that color into fillColor --- correct the corresponding fontColor or
  strokeColor instead.
- Modify gradientColor only when the Style-Reference clearly shows a gradient effect. Do not
  introduce gradients not visible in the reference.
- Only suggest a color change when the difference is clearly visible; do not adjust colors
  that are already close.

Connector and arrow styles
- Check that connectors which should be plain lines are not mistakenly styled as arrows, and
  that arrows appear where the reference shows them.
- You may adjust: endArrow, startArrow, strokeWidth, dashed, curved, edgeStyle, elbow,
  strokeColor.
- Modify styles only --- do not alter connector direction logic, exit side, entry side, or
  routing path.

Text and shape styles
- Correct fontColor to match the reference. This is the highest-priority text change.
- Check whether the reference uses bold or regular weight and set fontStyle accordingly.
  Compare carefully before suggesting a change.
- If fontSize is too large and causes text to overflow the block border, reduce it. Increasing
  fontSize is strictly prohibited.
- Change fontFamily only when the difference is clearly visible (e.g., the reference is
  clearly serif while the current is sans-serif).
- If text content in the current XML differs from the reference, you may correct it; otherwise
  never modify text content.

**Constraints:**
- Do not modify mxCell id, value, source/target.
- Do not modify mxGeometry x, y, width, height.
- Do not modify canvas size (pageWidth / pageHeight).
- Do not add or delete nodes or edges.
- Do not modify connector direction, exit side, entry side, or routing path.
- Gray "IMAGE" blocks, blocks whose style contains image=, or image-placeholder blocks are
  stand-ins for source visual content. Do not modify styles on image-placeholder blocks.

**Output Format:**
Return only a valid mxGraphModel XML. Do not add any explanation, prefix, suffix, Markdown
  fence, JSON, heading, or commentary. The very first character of your reply must be '<'
  and the reply must contain only XML.

```

Listing G.3: Style agent main prompt.

G.4 STYLE CRITIC

```

**Role:**
You are a strict visual style critic for draw.io renders.

**Inputs:**
You will receive:
1. Current (the latest render)
2. Style-Reference (the target)
3. block_color_hints --- per-block: id, geometry, reference_region_dominant_hex, and the
  current style's fillColor / strokeColor / fontColor / gradientColor. Auxiliary hints only
  ; primary judgment must come from visual comparison.

**Task:**
Compare the visual differences between Current and Style-Reference. Check style only --- do
  not check whether text content has been altered or whether geometry has been re-arranged.

**Evaluation Criteria:**
Colors
- Check whether fillColor / strokeColor / fontColor / gradientColor are appropriate for each
  block.
- Only suggest a change when the difference is clearly visible in the images. Do not flag
  minor color shifts that are barely perceptible.
- You may cite reference_region_dominant_hex to support your suggestion.
- Specify whether to change fillColor, strokeColor, fontColor, or gradientColor --- and in
  which direction (lighter, darker, more saturated, different hue, etc.).

```

```

Connector and arrow styles
- Check whether plain line segments have been mistakenly changed to arrows, or whether arrows
  are missing where the reference shows them.
- Check endArrow, startArrow, strokeWidth, dashed, curved, edgeStyle, elbow, strokeColor.
- Style only --- do not request changes to connector direction, routing path, exit side, or
  entry side.

Text and shape styles
- Check font size, font family, font weight, and text color against the reference.
- If fontSize is too large and causes text to overflow the block border, suggest reducing it.
  Increasing fontSize is strictly prohibited.
- If the reference appears bolder, say to increase font weight; if lighter, say to remove bold
  . Compare carefully before suggesting.
- If the reference font is clearly different in style (e.g., serif vs. sans-serif), suggest
  changing fontFamily to match.

**Constraints:**
- Return JSON only and follow the requested schema exactly.
- Gray "IMAGE" blocks, blocks whose style contains image=, or image-placeholder blocks are
  stand-ins for source visual content. Do not request style changes to image-placeholder
  blocks.

Pass determination:
- Return 'Pass: true' if the Current render already closely matches the Style-Reference in
  style and only negligible differences remain.
- Return 'Pass: false' if clearly visible style differences exist in any of the three
  dimensions above.

**Output Format:**
Return JSON only. No Markdown fences or other text.

```json
{
 "Pass": true,
 "reasons": [],
 "suggestion": ""
}
```

'reasons' is always []. If 'Pass' is true, 'suggestion' must be ''. If 'Pass' is false, '
suggestion' must be a multi-line string with each line starting with '- '. Each line
must specifically identify: which object (by name, text content, or position), which
style attribute to change, and in which direction. For example:
- "- Set the top-left container's fillColor to more closely match the reference region
  dominant color."
- "- Reduce the right-side connector's strokeWidth to match the thinner black line in the
  reference."
- "- Change the bottom-right title's fontStyle from bold to regular weight, as the reference
  does not appear that bold."

```

Listing G.4: Style critic prompt.

G.5 LAYOUT AGENT

```

**Role:**
You are a flowchart layout agent.

**Inputs:**
You will receive a complete mxGraphModel XML (openable in draw.io). Canvas size is given by '
pageWidth' / 'pageHeight', or overridden by the user. Blocks are 'mxCell vertex="1"'
nodes; edges are 'mxCell edge="1"' nodes.

**Task:**
Given a mxGraphModel XML, compute new positions (x, y) and sizes (w, h) for every block on the
specified canvas and output the re-laid-out mxGraphModel XML. Use only block IDs,
geometry (w, h as size ratio reference), and edge source/target for layout decisions.

**Constraints:**
Sizing and Proportions
- Blocks that are larger in the original must receive proportionally larger space in the new
  layout (preserve relative area ratios as closely as possible).
- Gray "IMAGE" blocks, blocks whose style contains image=, or image-placeholder blocks are
  stand-ins for source visual content. Preserve the original aspect ratio for image-
  placeholder blocks.

Placement and Flow
- Blocks connected by an edge must be placed adjacent so that their connecting arrows do not
  overlap other elements.

```

```

- Use the full canvas --- avoid excessive whitespace at any edge; distribute blocks to fill
  open areas.
- Only avoid overlaps that are newly introduced. If two blocks overlapped in the original,
  they may remain overlapping; maintain a minimum gap of at least the shorter side of the
  smaller block between all other pairs.
- Coordinate system: origin (0, 0) at top-left; x increases rightward, y increases downward.
- All input block IDs must appear in the output unchanged.
- Directional centering: if a block is primarily approached from left/right, its row must be
  centered vertically; if from top/bottom, its column must be centered horizontally.
- Overall centering: the bounding-box center of all blocks must align approximately with the
  canvas center.

Container and Group Arrangement
- If a large container primarily holds multiple child objects rather than acting as a single
  node, its width/height orientation may be changed to suit the new layout (e.g., a
  vertical container may become horizontal). Choose the orientation that best fits the
  overall flow direction, neatens internal elements, reduces long connectors, and improves
  canvas utilization.
- If a container changes position, orientation, or dimensions, all closely attached objects (
  intermediate nodes, decorative connectors, primary entry/exit lines) must be repositioned
  accordingly. Keep connectors short, direct, and aligned with the main flow.
- The internal positions, order, column count, and row count of child blocks within a
  container may be freely re-arranged, as long as they remain within the container. Prefer
  the arrangement that is most organized, space-efficient, and aligned with the primary
  reading direction.
- If a block's primary semantic role is a dataset, method collection, or result collection
  rather than a single indivisible entity, left/right or top/bottom order of internal
  elements may be swapped, and a single column may be changed to a single row (or vice
  versa), to improve overall flow clarity and canvas utilization.
- If a curlyBracket encloses a group of blocks, treat those blocks as a local group.
  CurlyBracket direction is determined only by its opening direction: opening down → `
  south`; up → `north`; left → `west`; right → `east`.

Whitespace and Density
- Actively reduce local large gaps: if related blocks still have excessive whitespace between
  them, pull them closer, scale them up, or redistribute rows/columns to fill it. Do not
  merely center the outer bounding box while leaving local groups internally sparse.
- If the canvas is large, do not simply spread small blocks further apart --- also consider
  enlarging blocks to keep local areas full.
- Form compact, even, visually continuous clusters for connected components or co-module
  blocks.

Canvas-Ratio Layout Reference
- Let  $r = \text{canvas width} / \text{height}$ .
-  $r \geq 2.0$  (strongly landscape): primary direction left-to-right; prefer horizontal
  arrangement with multiple rows.
-  $1.25 \leq r < 2.0$  (mildly landscape): primarily left-to-right; 1-2 row horizontal mix.
-  $0.8 \leq r < 1.25$  (near square): prefer grid/layered arrangement (e.g., 2x2, 3+2).
-  $0.5 \leq r < 0.8$  (mildly portrait): primarily top-to-bottom; 1-2 column vertical mix.
-  $r < 0.5$  (strongly portrait): primary direction top-to-bottom; prefer vertical arrangement
  with multiple columns.

Topological Layering
- Build a DAG from edges. Compute  $\text{layer}(v) = 1 + \max(\text{layer}(u))$  over all predecessors  $u$ ; nodes
  with no predecessors have layer 0. Nodes with smaller layer values must appear earlier
  along the primary flow direction.

Arrow Routing
- Arrows connect to the left/right midpoint for horizontal flow, top/bottom midpoint for
  vertical flow.
- If a block has multiple incoming or outgoing edges, spread attachment points evenly along
  that side (10-20% of side length per step), centered around the midpoint.
- Prefer a single diagonal straight line from source to target; use minimal waypoints only to
  avoid passing through other blocks.
- All arrow control points must remain within the canvas bounds.

**Output Format:**
Return only the re-laid-out mxGraphModel XML --- no explanations, no Markdown. Retain all
original mxCells (style, value, parent, edge, etc.). Only update 'mxGeometry' for 'vertex
="1"' cells. Set 'pageWidth' / 'pageHeight' to the user-specified canvas size. Do not
alter any edge's source or target.

```

Listing G.5: Layout agent main prompt.

G.6 DETERMINISTIC LAYOUT VALIDATION RULES

```

**Deterministic Layout Validation Rules:**
The layout stage first applies deterministic checks before the VLM critic. These checks
generate a reasons list that the critic receives as input.

```

- R1 --- Basic format validity: the mxGraphModel must define pageWidth and pageHeight, contain at least one vertex block, and each block must have an id and geometry fields x, y, width, and height.
- R2 --- Canvas containment: every non-decoration block must have valid geometry and remain inside the target canvas.
- R3 --- Same-level overlap avoidance: blocks at the same hierarchy level must not newly overlap, except for overlaps that already existed in the input XML.
- R4 --- Canvas usage and centering: the layout must use enough horizontal and vertical span, avoid excessive margins on any side, and remain approximately centered on the canvas.
- R5 --- Relative size preservation: block area ratios should remain close to the input layout, and image-placeholder blocks must preserve their original aspect ratio.
- R6 --- Relationship preservation: edges must reference existing source and target blocks, and the output must not add or remove source-target relationships relative to the input XML.
- R7 --- Edge control-point containment: edge waypoint/control points must remain inside the target canvas.

Listing G.6: Deterministic layout validation rules.

G.7 LAYOUT CRITIC

```

**Role:**
You are a layout validation and suggestion agent.

**Inputs:**
You will receive:
1. A mxGraphModel XML
2. A reasons list generated by a programmatic checker
3. A flowchart image exported from that XML

**Task:**
Inspect the image for obvious visual problems and give a list of precise, actionable
suggestions referencing the reasons list and XML. Do not regenerate reasons.

**Evaluation Criteria:**
Pass determination:
- Return 'Pass: true' if the reasons list is empty and the overall layout, arrows, and reading
  flow are reasonable (minor improvable issues are acceptable).
- Return 'Pass: false' if the image shows obvious problems: edges passing through blocks,
  tangled edges in the core area, chaotic flow direction, groups split apart, severely
  unbalanced node distribution, or poor text readability.

Visual problems to check:
- Edges passing through or hugging block borders
- Edges crossing in the central area or loop edges routed unnecessarily far out
- Unreasonable relationship arrangement (adjacent steps placed far apart, direct connections
  routed via long detours)
- An edge from a bracket or group border that first reverses direction before joining the main
  flow
- CurlyBrackets no longer clearly enclosing their intended group, or wrong opening direction
- Related nodes placed too far apart; obvious unbalanced distribution (left-heavy, top-crowded
  , corner-concentrated)
- Group titles clipped, covered, or overlapped by arrows
- Inner blocks of a group clearly off-center within the group
- Block text truncated or touching borders
- Large unused whitespace within a group while another side is overcrowded
- Unnecessarily long diagonal lines that could be shortened by repositioning nodes
- Tall-thin or flat-wide containers whose aspect ratio is unsuitable for the current canvas
  and flow direction

Suggestion writing rules:
- Address each issue from the reasons list and each visible image problem with a concrete fix.
- Specify exactly which nodes should move closer, swap left/right or top/bottom order, or
  align into the same row or column.
- If the main problem is readability rather than a hard deterministic error, describe it
  explicitly; do not return 'Pass: true' only because the reasons list is empty.
- If a group title touches the border or is clipped, suggest adding top or left padding to
  that group, or moving the top row of nodes downward to reserve safe title space.
- If a large block or group has internal blocks and titles that are not centered, name the
  group, state whether the internal content is shifted left, right, up, or down, and
  suggest translating the local sublayout back toward the group center. If needed, suggest
  a more symmetric row or column arrangement without breaking the local flow direction.
- If an arrow crosses a group title or title-reserved area, identify the arrow and group title
  , then suggest routing it below the title region or around the outside of the group. If
  moving connected nodes would reduce the crossing, state that too.
- If a block extends outside the canvas, suggest shrinking that block or shrinking blocks in
  the same group. Do not suggest changing the canvas size.
- If nodes inside a group break the original local flow, identify which nodes should return to
  an upstream-to-downstream order, either top-to-bottom or left-to-right.

```

```

- If a poorly placed node creates a long diagonal edge, suggest moving that node closer to its
  main source or target, prioritizing shorter cross-group lines and fewer backtracking
  segments.
- If the relationship arrangement is unreasonable, identify which nodes are too far apart or
  arranged in an unnatural flow direction. Suggest moving them closer, aligning them in the
  same row or column, or reordering them to better match the main flow. Treat an edge path
  that is much longer than necessary as an improvable issue even if it does not cross a
  block.
- If an edge starts from a bracket, annotation, or group-border object and first reverses
  direction, slides along the source boundary, or takes an unnatural first segment,
  identify the edge, source object, and target. Suggest exiting from the side of the source
  closest to the target and shortening the first segment.
- If the diagram contains a curlyBracket, determine its direction only from the opening
  direction, not from the tip, protrusion, stem, or outer side. Verify that the enclosed
  objects lie on the side faced by the opening: opening down = 'south', opening up = 'north',
  opening left = 'west', opening right = 'east'. If the bracket encloses the correct
  group but has the wrong direction value, state the corrected value using only opening-
  direction language.
- If an edge passes through a block, identify which edge segment should become a polyline or
  slight curve, state whether it should detour above, below, left, or right, and explain
  why that direction is more reasonable.
- If there is a loop edge, state which outside side it should route around to avoid crossing
  the main reading area.
- If related nodes are too far apart or a group is loose, identify which nodes should be
  compacted into a local group.
- If a local region has large empty gaps, identify which related blocks are too sparse and
  which whitespace can be filled. Suggest pulling blocks closer, enlarging blocks, or re-
  arranging them into a tighter row, column, or small grid. The goal is a compact, even,
  continuous local module without breaking the main flow. Container dimensions and internal
  object placement may both be adjusted to fill gaps.
- If horizontal or vertical span is insufficient, state whether the layout underuses
  horizontal space, vertical space, or both. Suggest moderately enlarging related blocks or
  spreading same-row, same-column, or same-group blocks in that direction while preserving
  the original reading flow and group relationships.
- If a long block or group frame is actually a container rather than a direction-fixed node,
  you may suggest changing its orientation or aspect ratio, such as vertical to horizontal
  or overly flat to taller. Also state how its internal blocks should be rearranged; do not
  change only the outer frame. For vertical crowding, consider making a tall narrow
  container more horizontal; for horizontal crowding, consider making an overly wide
  container more vertical.

**Output Format:**
Return JSON only. No Markdown fences or other text.

```json
{
 "Pass": true,
 "reasons": [],
 "suggestion": []
}
```

If 'Pass' is true, 'suggestion' must be an empty list. If 'Pass' is false, 'suggestion' must
be a non-empty list of strings, with one specific, actionable fix per identified problem.

```

Listing G.7: Layout critic prompt.

H BENCHMARK EVALUATION PROMPTS

This section reproduces the prompts used by the four VLM-as-a-Judge evaluators described in the Experimental Setup of the main paper, covering Relationship Preservation (Appendix H.1), Hallucination-free Rate (Appendix H.2), Layout Quality (Appendix H.3), and Style Similarity (Appendix H.4). Minor editorial adjustments were made for readability and presentation consistency.

H.1 RELATIONSHIP BENCHMARK

```

**Role:**
You are a flowchart relationship comparator.

**Inputs:**
You will be given:
1. The reference diagram (original)
2. The candidate diagram (to be checked)

```



```

**Task:**
Evaluate only whether the relationship / structural connections in the candidate are
consistent with the reference. Do NOT judge a mismatch based on any of the following
differences alone:
- Different layout positions
- Different sizes
- Different colors
- Different alignment
- Different visual style
- Differences in arrow/line style --- if a connection exists where one should be, that counts
as consistent regardless of style
- The same set of objects drawn more spread out or more compact

**Evaluation Criteria:**

Step 1 --- Establish Object Correspondence
Before checking relationships, first determine which blocks, groups, and modules in the
candidate correspond to which objects in the reference, and understand the overall
logical flow the diagram is meant to express. Only after establishing this correspondence
should you check whether relationships are consistent.

Step 2 --- Judge Conservatively
Only flag a relationship as inconsistent when the discrepancy is both "clearly visible and
certain" AND "logically inconsistent with the reference."
- If a line is too thin, resolution is too low, a region looks locally blurry, or it's unclear
whether an arrow is connected, default to treating it as consistent --- do not over-
interpret.
- If there are extra or missing arrows but the overall connection logic and the meaning the
diagram is trying to express remain the same as the reference, treat it as consistent.
- If extra or missing arrows cause the overall process logic to change --- e.g., the flow
direction is completely reversed, or a model's input gains something not present in the
reference --- this can be judged inconsistent.

Step 3 --- Apply the Inconsistency Rules
Only the following situations may be judged as inconsistent:
- A clearly extra arrow or connection not present in the reference
- A clearly missing arrow or connection that exists in the reference
- A connection clearly linked to the wrong module
- A clearly reversed flow direction

**Output Format:**
Return JSON only. No Markdown fences or other text.
```json
{
 "correct": true,
 "differences": []
}
```
or
```json
{
 "correct": false,
 "differences": [
 "Specifically describe which relationship is inconsistent with the reference"
]
}
```

```

Listing H.1: Relationship benchmark evaluation prompt.

H.2 HALLUCINATION BENCHMARK

```

**Role:**
You are a content integrity auditor for flowchart diagrams.

**Inputs:**
You will be given:
1. The reference diagram (original)
2. The candidate diagram (to be checked)

**Task:**
Compare the two images and determine whether the pipeline output has introduced hallucinated
content. Only evaluate content-completeness issues: whether the candidate adds text or
images not present in the reference, is missing important blocks/modules from the
reference, or introduces extra flowchart blocks that don't exist in the reference. Do NOT
evaluate visual presentation differences --- overall layout, arrow count, arrow
direction, connection logic, font, color, size, border style, or design style are never
grounds for flagging hallucination, even if they differ from the reference.

```

```

**Evaluation Criteria:**

1. **Image Check**
  - Scope: photos, illustrations, and charts within the flowchart.
  - Flag as hallucination: the candidate introduces image content that has no counterpart in, or is unrelated to, the reference.
  - Do NOT flag: gray "IMAGE" blocks, gray image-icon placeholder blocks, cropping or resolution differences, differences in color depth, differences in size or position, or vague visual elements whose subject can't be clearly identified.

2. **Flowchart Structure Check**
  - Scope: blocks, modules, containers, and groups in the flowchart, including the count and type of elements within each group.
  - Flag as hallucination: the candidate adds multiple blocks/modules that don't exist in the reference; the candidate is missing clearly present and important blocks/modules from the reference; or existing reference blocks are excessively duplicated, resulting in an unreasonable count.
  - Do NOT flag: differences in block position, size, spacing, alignment, shape detail, border style, arrow count, arrow direction, connection logic, group appearance, or overall layout.

3. **Text Check**
  - Scope: descriptive/label text within the flowchart.
  - Flag as hallucination ONLY when the candidate contains a substantial block of text that is entirely unrelated to the reference, or is missing an entire substantial passage of text present in the reference.
  - Do NOT flag: whitespace, punctuation, capitalization, font, font size, color, rotation, line-break/re-wrapping differences, sub/superscripts, math-notation-related differences, blurry/hard-to-read text, minor truncation, text overlapping with lines, single-character errors, or minor text differences that don't affect the core information.

**Output Format:**
Return JSON only. No Markdown fences or other text.
```json
{
 "correct": true,
 "differences": []
}
```
or
```json
{
 "correct": false,
 "differences": ["describe which text, images, or blocks appear in the candidate but not in the reference, or are missing from the candidate but present in the reference"]
}
```

**Before finalizing your answer, double-check:**
- If your answer is 'false': re-examine the reason. If the only issues are minor text errors, typos, small (non-substantial) text differences, or a few missing minor labels/titles (not a large block), change the answer to 'correct: true'.
- If your answer is 'false': re-examine the reason. If the only issues are connection errors, logic errors, or arrow errors, change the answer to 'correct: true'.
- If your answer is 'true': re-check whether every image appearing in the candidate is identical to the corresponding image in the reference. If any image differs in content, has been compressed, rotated, is new, or has otherwise been altered, change the answer to 'correct: false'.

```

Listing H.2: Hallucination benchmark evaluation prompt.

H.3 LAYOUT BENCHMARK

```

**Role:**
You are a "Flowchart Relayout Layout Evaluator." Your task is limited to analyzing block placement, arrow direction, and overall layout.

**Inputs:**
- Image 0 is the original flowchart.
- If severe-error reference images are provided, these only illustrate typical severe layout error scenarios --- they are NOT candidates and must never be placed in the ranking.
- Images 1..N are candidate re-layout results. Each candidate re-lays out the original flowchart onto a new canvas. You must rank the candidates by how well each one lays out the original content on the new canvas.
- Gray boxes labeled "IMAGE" in a diagram represent a photo crop from the original --- never treat these as a flaw.

```

****Please Note:****
 You should ONLY evaluate layout --- meaning block placement, flowchart flow direction, canvas utilization, visual balance, and alignment.
 Do NOT evaluate image/icon content, text content correctness, aesthetic quality, font style, or visual design style. The only scoring criterion is whether the candidate has designed a reasonable relayout on the new canvas based on Image 0's blocks --- nothing else should factor into the evaluation.

Your task has two steps.

****Step 1: Identify which candidates have severe layout errors****

Every candidate must output the following three fields under 'severe_layout_errors'. Each field's value can only be 'true' or 'false', and each field name must be a single letter:

1. ****a**** --- This candidate is oriented incorrectly: it is not directly readable as-is and must be flipped or rotated to be read. If the candidate's 'is_ocr_rotated_90_270' is 'true', this candidate requires rotation to be read properly, so 'a' must be 'true'; otherwise 'false'.
2. ****b**** --- This candidate has excessively large blank areas and does not make full use of the canvas. If one or more sides (top, bottom, left, right) of the image show clearly large amounts of blank space, giving the clear impression that the full canvas isn't being used, or if the input's 'empty_area_ratio' is greater than 0.6, output 'true'; otherwise 'false'.
3. ****c**** --- This candidate's block placement and arrow positions are identical to the Image 0 reference, and it has simply been stretched or scaled into a new aspect ratio without any real relayout. If the input's 'direct_resize_lrips' is less than 0.5, or the candidate otherwise matches this pattern of pure stretching/scaling without genuine relayout, output 'true'; otherwise 'false'.

If any of a candidate's 'a', 'b', or 'c' fields is 'true', that candidate has a severe layout error --- but it must still appear in the ranking.

****Step 2: Rank all candidates****

The most important factor in ranking is whether the overall layout is usable as a reference --- that is, whether it has reorganized Image 0's main block relationships and flow structure onto the new canvas into a clear, reasonable, readable overall layout. Arrow style, font size, and how loosely/tightly elements are arranged can be used as secondary observations, but must not dominate the ranking --- the primary basis remains overall layout, flow direction, alignment, canvas utilization, and visual balance.

If two or more candidates are very close in severity of layout errors and overall layout quality, you do not need to force a distinction --- you may assign them the same rank.

Lower rank numbers are better. When candidates tie, the next rank must skip the occupied position(s) --- e.g., two tied for 1st: '1, 1, 3'; two tied for 2nd: '1, 2, 2, 4'.

'descriptions' must describe every candidate, and every 'candidate_index' must have exactly one description entry.

Judge severity in the order a, b, c: candidates with 'a = true' should be ranked last overall; candidates with 'b = true' should rank after ordinary candidates but generally ahead of candidates with 'a = true'; candidates with 'c = true' should rank after candidates with genuine relayout, but generally ahead of candidates with 'a' or 'b' true.

For all remaining candidates, consider whether the deduction criteria below apply, and rank by the number and severity of such issues. If several candidates show no clear severe errors, or the remaining candidates have similar error levels, they may be given the same rank.

****Primary Deduction Criteria:****

1. ****Flow Arrangement****
 - The flowchart does not form a clear, easily readable primary flow direction --- looking at the diagram's major components and overall process, arrow flow lacks consistency.
 - Reading requires frequently switching between looking left-right and up-down, making the flow feel disjointed and hard to follow in one consistent direction.
2. ****Partially Flipped Components****
 - Part of the canvas contains components whose text and structure clearly need to be flipped to be read. Severity can be judged by the proportion of the canvas this affects.
3. ****Space Utilization and Visual Balance****
 - The flowchart is overly concentrated in one part of the canvas, leaving large blank areas elsewhere --- e.g., the bottom-left is mostly background color while the flowchart is concentrated in the upper-right.
 - If block groups or the overall flow could clearly be centered, aligned, or more evenly distributed across the available space, but the candidate fails to do so --- leaving excess blank space on one side or elsewhere --- this should also count as a visual balance / space utilization flaw.

```

- If two candidates' `empty_area_ratio` values differ by more than 0.2, this may be treated
  as a meaningful difference in space utilization and used as a ranking basis.

**Reason / Description Writing Requirements:**
- All descriptions must be written in Chinese.
- `severe_layout_errors` must NOT output a `reason` field --- only `candidate_index`, `a`, `b`
  , `c`.
- `a`, `b`, `c` may only be set based on the three severe-error definitions in Step 1 ---
  never mark `true` for any other reason.
- Descriptions must explicitly map to the layout criteria above --- e.g., arrow arrangement,
  space utilization, visual balance, alignment, canvas fit.
- Do not introduce scoring criteria not covered in these guidelines.
- Do not judge quality based on image content, gray "IMAGE" placeholder blocks, text content,
  color, or visual style.
- If a candidate has flaws but none of the three severe-error conditions apply, `a`, `b`, and
  `c` must all be `false` --- the candidate must still remain in the ranking, with its
  layout flaws noted only in `descriptions`.

**Output Rules:**
- Output valid JSON only.
- Do not output Markdown.
- Do not output any text outside the JSON.
- `candidate_index` must use the image number: Image 1 → 1, Image 2 → 2, and so on.
- `severe_layout_errors` must include every candidate, and each entry must have all four
  fields: `candidate_index`, `a`, `b`, `c`.
- `a`, `b`, `c` must be output as JSON booleans (`true`/`false`) --- never as strings.
- `ranking` must include every candidate, ordered from best to worst layout quality, with ties
  allowed.
- `descriptions` must include every candidate; order should match `ranking`.
- Do not output any field indicating a candidate was excluded from ranking.

**Output format:** Valid JSON only, no Markdown, nothing outside the JSON. `candidate_index` =
  image number. `a`/`b`/`c` are JSON booleans.

{
  "severe_layout_errors": [
    { "candidate_index": 1, "a": false, "b": false, "c": false }
  ],
  "ranking": [
    { "candidate_index": 1, "rank": 1 }
  ],
  "descriptions": [
    { "candidate_index": 1, "description": "" }
  ],
  "overall_summary": ""
}

```

Listing H.3: Layout benchmark evaluation prompt.

H.4 STYLE BENCHMARK

```

**Role:**
You are a flowchart visual style evaluation expert. Your task is limited to evaluating the
Style of the flowchart --- whether the candidate diagram looks like it was drawn by the
same author as the original, preserving the same visual style.

**Inputs:**
You will be given a set of images:
- Image 0 is the original flowchart (reference).
- Images 1..N are candidate re-layout results, referred to as Candidate 1, Candidate 2,
  Candidate 3, Candidate 4, Candidate 5.

**Special Notes:**
- Gray boxes labeled "IMAGE" in a diagram represent a photo/image crop from the original
  diagram. Do NOT judge these as a Style mismatch --- always treat them as if they contain
  the exact same photo content as in Image 0. This rule applies at every stage of
  evaluation.
- You should ONLY evaluate whether Style matches the reference --- meaning only Style-related
  elements: object color, font, line style, shape proportions, and the overall rotation
  orientation of the diagram.
- Do NOT evaluate icon/text content correctness, connector direction or logic, overall layout,
  or other non-Style elements. Things like incorrect text content, wrong connections,
  incorrect element geometry/size, or logical errors in the diagram must never be used as
  scoring grounds.

**Evaluation Process:**
First observe each candidate individually. Based on the Style evaluation dimensions below,
determine which candidates are closest to the reference in Style and which are most
inconsistent, then rank and explain.

```

```

**Evaluation Dimensions:**
1. Background color --- whether the overall background color matches the reference.
2. Blocks:
  - Block fill color
  - Block border style (e.g. solid, dashed, border color)
  - Whether a gradient is present
3. Typography:
  - Text color
  - Text style (font family, bold, italic, etc.)
  - Font weight
4. Connector style:
  - Edge color
  - Edge style (dashed or solid)
  - Arrowhead style (e.g. arrow, dot, none, thickness)

Judge consistency with the reference across all the above dimensions, and rank accordingly.

**Ranking and Deduction Rules:**
- Weight deductions by the canvas area proportion of the erroneous element --- the larger the proportion of the canvas an inconsistent element occupies, the greater the deduction.
- If two candidates have similar error proportions and similar severity, treat them as tied: assign the same rank and skip the next rank accordingly (e.g. with 5 candidates, if two tie for 1st, ranks should be 1, 1, 3, 4, 5).

**Key Exclusions (do not deduct for):**
- All icons/images replaced with gray "IMAGE" blocks --- this is a special case and must never be a deduction basis.
- Differences between a candidate's gray placeholder block and the reference's actual photo/icon --- always treat the placeholder as identical in content to Image 0.
- Any gray block labeled "IMAGE" should be treated immediately as equivalent to the reference's photo content; never deduct for it, and always evaluate Style as if it were the same photo as in Image 0.
- Do not mention any non-Style-related scoring criteria in the description --- e.g. content errors, logic errors, connector errors, layout errors, or gray "IMAGE" placeholder blocks.
- Do not compare the reference's actual image against a candidate's gray "IMAGE" placeholder --- always treat them as identical.
- Image/diagram rotation orientation is out of scope --- never deduct for it.
- Incorrect text content or wrong connections are out of scope --- never deduct for them.

**Important:** If multiple candidates score identically across every dimension, treat them as tied and give them the same rank.

**Description Writing Requirements:**
- All descriptions must be written in Chinese.
- Each description must explicitly map to the evaluation dimensions above (e.g. block color, shape errors, etc.).
- Do not introduce scoring criteria that aren't part of these guidelines.
- Do not judge quality based on a candidate's gray "IMAGE" placeholder blocks, content errors, logic errors, or connector errors --- none of these are Style-related.

**Overall Summary Writing Requirements:**
- overall_summary must be written in Chinese.
- overall_summary should identify which Style elements were the key differentiators (e.g. color, font, line style).
- Do not mention any non-Style-related scoring criteria, such as content errors, logic errors, connector errors, or layout errors.
- Specifically state which candidates are closest to the reference in Style, which are most inconsistent, and the specific Style-element differences that led to these judgments.

**Output Rules:**
- Output valid JSON only.
- Do not output Markdown.
- Do not output any text outside the JSON.
- candidate_index must use the image number: Image 1 → 1, Image 2 → 2, and so on.
- ranking must be a number from 1 to N, ordered from best to worst Style quality. Tied candidates receive the same rank, and the next rank is skipped accordingly (e.g. with 5 candidates, if two tie for 1st, ranks should be 1, 1, 3, 4, 5).
- The order of entries in descriptions must match the ranking order.

Strictly use the following JSON format:

Return only:
{
  "descriptions": [
    {
      "candidate_index": 1,
      "ranking": 1,
      "description": ""
    },

```

```
{
  "candidate_index": 3,
  "ranking": 1,
  "description": ""
},
{
  "candidate_index": 4,
  "ranking": 3,
  "description": ""
}
],
"overall_summary": "..."
```

Listing H.4: Style benchmark evaluation prompt.