
NEURAL PETRI FLOWS FOR CHEMICAL REACTIONS

A PREPRINT

Jose Eduardo Escrig Molina
 Bioinformatics Group
 Bioprocess Engineering Group
 Wageningen University
 Wageningen, the Netherlands
 joseeduardo.escrigmolina@wur.nl

 **Daniel Probst**
 Bioinformatics Group
 Wageningen University
 Wageningen, the Netherlands
 daniel.probst@wur.nl

October 7, 2026

ABSTRACT

Petri nets, in which transitions move tokens between places, have been used to describe chemical processes such as reactions. Petri net terms map well to chemistry: Places are the bonds between atoms and the free valence of each atom, a token is a unit of bond order, a transition forms or breaks a bond, the conserved quantities are the valence budgets of the atoms, and the enabling rule, that a transition needs tokens on its input places, is the valence rule. These semantics are not guaranteed by learned models of reactions or neural networks that are built on Petri nets, which use the net as a scaffold for message passing. Here, we ask what architecture remains a Petri net for every value of its weights. We find the answer in the theory, where all semantics of a net share the firing form $m' = m + C\sigma$, locality, as enabling reads only the inputs of a transition, and the enabling rule, and we prove that conservation forces the firing form and that non-negativity forces the enabling rule on local rate laws. What this leaves free is the rate law, which is the propensity of each transition to fire. We introduce Neural Petri Flow, which learns this rate law, or a readout for classification, and hard-wires the rest as parameter-free layers. On what we denote a valence net, atom mapping, reaction classification, and forward prediction become three tasks on one firing vector, which is an unordered list of bond changes. Without training, the minimum firing vector maps 88.8 % of the curated Golden set against 85.6 % for RXNMapper, and 88.7 against 77.9 % of the enzymatic reactions of EnzymeMap. On USPTO-480K, NPF trained on these firing vectors predicts 87.7 % of the products and 67.4 % when trained on a 1 % subset of the training reactions. EC numbers of ECREACT are predicted at the third level for 90.2 % of reactions, 5.6 points ahead of the best published method. With electrons as tokens, the same token game predicts 90.5 % of the elementary steps of Flower first, ahead of the published baseline, and every top-1 prediction is a valid molecule without a filter.

Keywords chemistry · neural petri nets · reaction prediction atom mapping · reaction classification · enzymology

1 Introduction

Petri nets were devised in order to describe chemical processes [Petri and Reisig, 2008]. While Petri nets became a standard tool for concurrency, chemistry kept them to describe reaction networks, where places are species [Koch, 2010, Baez and Biamonte, 2019]. We take this approach down to chemical bonds of a single reaction, and ask what kind of neural network it takes for its outputs to obey the rules of that net for every value of its weights, as the rules are computed instead of learned. Learning only fills in what the rules leave open, such as which bonds change.

A reaction as a net. Given the heavy atoms, which are all atoms other than hydrogen, of the precursors of a chemical reaction, we define a bond place B_{ij} for every pair (i, j) of atoms and a slack place S_i for every atom i . Tokens on B_{ij} are units of bond order, where a single bond is one token, a double bond is two tokens, and an aromatic bond one and a half. Tokens on S_i are units of valence of atom i not spent on bonds with other heavy atoms, namely, its hydrogens,

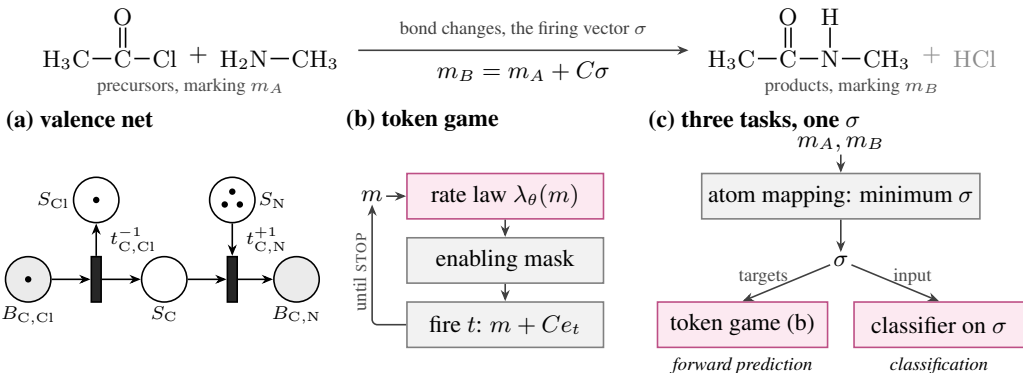


Figure 1: (a) A reaction as two markings of its valence net. (b) Only the rate law (magenta) is learned. (c) The minimum firing vector σ maps atoms, trains the token game and feeds the classifier.

its negative charge, and a capacity to become cationic or hypervalent, one token for nitrogen and none for carbon. A marking is the vector of all token counts or, in chemistry terms, a set of molecules. A reaction is then a pair of markings, m_A and m_B for the reactants and the products, respectively. The two are written on different atoms, and an atom map, which assigns every product atom to the matching precursor atom, makes them markings of one net. Transitions t are elementary bond changes, where, for every atom pair (i, j) and every amount δ , a transition takes δ tokens from each of S_i and S_j and puts δ tokens on B_{ij} , forming a bond of order δ . The reverse operation breaks the bond. Firing a transition is the realisation of that bond change, and the firing-count vector σ , firing vector for short, counts the firings of every transition, describing a reaction as an unordered list of bond changes. The state equation $m_B = m_A + C\sigma$ reads products = precursors + bond changes, where the matrix C records which places each transition empties and fills. The P -invariants are the quantities no firing can change, namely, the valence budgets of the atoms, each the bond orders plus its free valence of an atom. The enabling rule that states that a transition may only fire when its input places hold enough tokens, is the valence rule. For example, a carbon with four bonds to other heavy atoms has to break one before it can form another. This net, the valence net of the reaction, has no parameters, as it is fixed by the precursor atoms and the rules of valence.

Sequence models can write strings that are not a valid molecule, and electron-flow and graph-edit models can predict bond changes that are not guaranteed to respect valence for every output. Stated in net terms, the outputs of these models are not markings (states) that any firing sequence can reach. Current Petri graph neural networks pass messages between places and transitions, using the net as a computation graph, but the states they update are not markings [Hu et al., 2020, Ademovic Tahirovic et al., 2025]. We therefore ask whether a model of reactions can, for every value of its weights, guarantee products with valid valences and bond changes accounting for the observed change exactly, and whether this guarantee increases or decreases accuracy.

Approach. Discrete, continuous, and stochastic nets, the three semantics of a net, only differ in their rate law, which is the propensity of a transition to fire given the tokens on its input places, and share the firing form, the enabling rule, and locality. Therefore, Neural Petri Flow (NPF) only learns the rate law, or a readout for classification, and computes the rest without trainable parameters. Atom mapping solves the state equation for the firing vector that forms or breaks the fewest bonds without learned weights, and gives the forward model its training target. For forward prediction, NPF plays a token game in which it fires one bond change at a time with the learned rate law choosing each move (Figure 1). For chemistry, the rate law reads the whole marking and as the token game fires one bond change at a time, non-negativity still requires the enabling rule, which is imposed as a mask (Section 4). With electrons as tokens, the same token game predicts the elementary steps of reaction mechanisms (Section 5).

More than a Petri net in name only. To avoid introducing a generic neural network that is a Petri net in name only, we support every Petri component of the valence net that carries a guarantee with a proof, a reason no neural network without the Petri net can do the same, a numerical check, and every component except conservation with a comparison to a generic network of equal size. For the valence rule, we prove that, for every value of its weights, the token game never gives a carbon with a valence budget of four a fifth bond (Proposition 4), and that the rule removes orders of bond changes but never a product within the valence budgets (Lemma 2. With untrained weights, no marking that the token game visits breaks the rule by more than half a token (Appendix D.5). Graph-edit and electron-flow models also change one bond or electron pair at a time, however, most fix or learn an order of edits [Do et al., 2019, Sacha et al., 2021], learn the valence rule, as FlowER does [Joung et al., 2025], or check only that the giving site has electrons, and not that

the receiving atom has room, as in MAELLE [Xuan-Vu et al., 2026]. In NPF, the valence rule holds at every step for every weight, and the state equation makes the order irrelevant.

Contributions.

- **Neural networks that remain Petri nets.** Neural Petri Flow only learns what the theory of the net leaves open, namely, one rate law that is shared across nets with conflict or, for classification tasks, a readout of the firing vector, and computes the firing form, the enabling rule, and the state equation as layers without trainable parameters. The conservation of every P -invariant forces the firing form, and keeping markings non-negative forces the enabling rule on any continuous, local rate law shared across nets. For every value of the weights, every marking visited by the token game is reachable in the valence net once every atom holds half a token of extra free valence for aromatic bonds of order $\frac{3}{2}$.
- **The valence net, a single object for three tasks.** Atom mapping, reaction classification, and reaction forward prediction become three tasks on one firing vector, which is the unordered list of bond changes. Mapping infers it, classification reads a label off it, and the forward model predicts it. Like other atom mappers of minimum chemical distance [Jochum et al., 1980, First et al., 2011, Mann et al., 2014, Ali et al., 2025], our mapper minimises bond changes, without learned weights, and it maps reactions with a missing reactant or by-product (Appendix D.1) and proves the map optimal for 100 % of a curated reaction set. Its tied optima are training targets of the forward model, which therefore needs neither the maps of a learned model nor an order of edits.
- **Mechanisms as nets of electrons.** Taking electrons as tokens turns the elementary steps of a mechanism into firings of an electron net, in which fishhook and curly arrows are the transitions, the number of electrons is a P -invariant, and the octet rule is the enabling rule. With the rate law and token game of the forward model, it predicts 90.5 % of the elementary steps of FlowER first and recovers 94.5 % of the pathways, ahead of the published baselines, and every end marking is a Lewis structure by construction.

2 Related work

Petri nets and learning. Abdul Hameed et al. [2025] introduced a max-plus network learning the timing of timed event graphs, which are conflict-free nets. Trainable mass-action reaction networks as introduced by Nagipogu and Reif [2025] and Dack et al. [2026] and a neural Petri net computed by the state equation by Medina-Marin et al. [2023] are also nets for every value of their parameters, each for one system. Message passing along Pre and Post was introduced as a Petri net convolution for scheduling by Hu et al. [2020], and PGNN by Ademovic Tahirovic et al. [2025], which we use as a baseline, passes messages between the places and transitions of attributed nets.

Conservation and structure in neural networks. Hybrid models where a neural network predicts rates inside first-principle balances are the closest to the token-game layer from Appendix C.2 [Psichogios and Ungar, 1992]. Sturm and Wexler [2022] discuss a fixed stoichiometric matrix on learned fluxes of atoms between molecules in atmospheric photochemistry, with kinetic models pass learned rates through such a layer [Kircher et al., 2024, Fonseca et al., 2026]. Chemical reaction neural networks hard-wire mass action and learn the associated stoichiometry [Ji and Deng, 2021, Döppel and Votsmeier, 2024]. These models realise the sufficiency direction of Proposition 1.

Reactions. Petri nets are used to model reaction networks with species as places [Koch, 2010, Baez and Biamonte, 2019, Andersen et al., 2025], while reversing Petri nets enable the symbolic modelling of covalent bonds [Melgratti et al., 2022]. We use a net a level below the species, for the bonds in a single reaction, where the state equation on the bond places is the bond–electron matrix equation introduced by Dugundji and Ugi [1973]. Our firing vector is, up to hydrogens and charges, the imaginary transition state or the condensed graph of reaction, counted as firings [Fujita, 1986, Varnek et al., 2005]. Atom mappers are learned [Schwaller et al., 2021a, Chen et al., 2024, Astero and Rousu, 2025] or compute the mapping of minimum chemical distances [Jochum et al., 1980], solved exactly as integer or constraint programs [First et al., 2011, Latendresse et al., 2012, Mann et al., 2014, Ali et al., 2025]. As for reaction classifiers, they use fingerprints [Schneider et al., 2015, Probst et al., 2022b] or learned representations [Schwaller et al., 2021b, Heid and Green, 2021], while our readout is a learned difference fingerprint with a proof that what is left unchanged by a reaction cancels. Finally, forward reaction predictors generate SMILES [Schwaller et al., 2019, Tetko et al., 2020, Irwin et al., 2022, Tu and Coley, 2022, Zhong et al., 2022], apply templates [Chen and Jung, 2022], predict graph edits [Jin et al., 2017, Coley et al., 2019, Do et al., 2019, Sacha et al., 2021, Bradshaw et al., 2018], or redistribute electrons [Bi et al., 2021, Meng et al., 2023, Joung et al., 2025, Chen et al., 2025]. While the latter conserve electrons, none of them enforces valence on every discrete output. Recently, Xuan-Vu et al. [2026] introduced MAELLE, which learns a Markov chain of electron moves from unordered move sets. It is a stochastic net in our terms, with enabling

rules on the source only, no valence invariant, and products ranked by their sampling frequency, training on the atom maps of RXNMapper, where our targets come from the net.

3 Preliminaries

Nets. A net is defined as $N = (P, T, \text{Pre}, \text{Post})$, where places P and transitions T are finite disjoint sets and $\text{Pre}, \text{Post} : P \times T \rightarrow \mathbb{R}_{\geq 0}$ are arc weights. For the input and output places of transition t , we write $\bullet t = \{p : \text{Pre}(p, t) > 0\}$ and $t^\bullet = \{p : \text{Post}(p, t) > 0\}$, respectively. The incidence matrix of the net is $C = \text{Post} - \text{Pre} \in \mathbb{R}^{P \times T}$, where C_t are the columns.

Markings, enabling, and firing. A marking $m \in \mathbb{R}_{\geq 0}^P$ assigns m_p tokens to place p . $\text{enabl}(t, m) := \min_{p \in \bullet t} m_p / \text{Pre}(p, t)$ is the enabling degree of t at m , and ∞ if $\bullet t = \emptyset$. In the discrete case, t is enabled if $\text{enabl}(t, m) \geq 1$ and fires in amount $\alpha = 1$ [David and Alla, 2010], and in the continuous case in any amount $0 < \alpha \leq \text{enabl}(t, m)$. A firing yields $m' = m + \alpha C_t$, written as $m \xrightarrow{\alpha t} m'$. A firing sequence $s = \alpha_1 t_1 \dots \alpha_n t_n$ is enabled at m_0 if every step can fire, in its amount, at the marking reached so far, and we call the markings it reaches reachable from m_0 . The firing-count vector $\sigma(s) \in \mathbb{R}_{\geq 0}^T$ has the entries $\sigma_t = \sum_{k: t_k = t} \alpha_k$.

State equation and invariants. The state equation is given by summing the firing rule along a sequence

$$m_0 \xrightarrow{s} m \Rightarrow m = m_0 + C\sigma(s). \quad (1)$$

The converse of this fails in general, as a non-negative solution σ of $m = m_0 + C\sigma$ does not need to be the count vector of any enabled sequence [Murata, 1989], however, on the valence net it holds for every firing vector that changes each bond place at most once and reaches a non-negative marking (Lemma 2). Two sequences enabled at m_0 , with the same count vector, reach the same marking by Equation 1, and we call them count-equivalent. A vector $x \in \mathbb{R}^P$ with $x^\top C = 0$ is a P-invariant. By (1), $x^\top m = x^\top m_0$ for every m of the form $m_0 + C\sigma$, specifically for every reachable marking. A vector $y \in \mathbb{R}^T$ with $Cy = 0$ is a T-invariant. By (1), an enabled firing sequence returns the net to its starting marking exactly when its count vector is a T-invariant. In chemistry terms, different orders of the same bond changes are count-equivalent sequences.

Timed semantics. The stochastic net introduced by Molloy [1982] is a continuous-time Markov chain on $\mathbb{N}^P$ that jumps from m to $m + C_t$ at a rate $\lambda_t(m)$, where $\lambda_t(m) = 0$ unless t is enabled at m . $N_t(\tau)$ counts the firings of t up to time τ , so $m(\tau) = m(0) + CN(\tau)$, conserving P-invariants pathwise, which ensures that every atom keeps its valence budget after every single bond change and on every sampled route. The rate law λ is local if λ_t depends on m through $(m_p)_{p \in \bullet t}$ only. The rate law represents the chemistry, namely, how likely each bond change is given the molecules present.

Two learning problems. The net, the static attributes e_p and a_t of places and transitions, respectively, and the markings are observed, while the rate law is not. The forward problem to predict $m(\tau + \Delta)$ from $m(\tau)$, which is, in chemistry terms, predicting the products from the precursors. The inverse problem is the prediction of the bond changes, or firing counts $\sigma^* = N(\tau_B) - N(\tau_A)$ given the precursors A and the products B .

In reactions, the products are recorded on their own atoms. Then, an atom map, an injection π of the product atoms onto the precursor atoms of the matching element, places them on the precursor places as $P_\pi m_B$. The inverse problem is atom mapping, that is, to find π and σ^* with $P_\pi m_B = m_A + C\sigma^*$ on the bond places. As we show in Appendix A.5, the markings fix neither π nor the part of σ^* in $\ker C$. Classification reads a label off σ^* .

4 Neural Petri flow

The semantics introduced in Section 3 share state changes of the form $C\sigma$ with $\sigma \geq 0$, which we call the firing form, and locality, as enabling reads only the input places of a transition. We hard-wire these while learning the rate law, the single object the theory leaves free. For classification, a readout is learned instead (Section 4.2). Appendix C tests the layers with a local rate law on measured metabolic fluxes.

4.1 Enforcing the firing form and the enabling rule

We show that the firing form and the enabling rule are forced, rather than chosen. If a marking is updated, every P-invariant at every marking is kept iff it is a combination of the columns of C , $u(m) = Cv(m)$ (Proposition 1). This

means that a model exactly keeps every valence budget for all weights whenever it changes the marking by bond changes, while a generic readout with an output bias would conserve only for a set of weights of measure zero. The enabling rule follows from non-negativity. If a rate law is local and shared across nets, continuous, and non-negative, it keeps every marking non-negative only if it is zero whenever an input place is empty (Proposition 2). In chemistry terms, a negative slack place is an atom with more bonds than allowed by the valence rule. Proposition 1 extends Theorem 3.1 of Horie and Mitsune [2024], which states that message passing on a graph conserves only a total with antisymmetric fluxes, to all P -invariants of a net, and it keeps a learned update in the stoichiometric subspace of reaction network theory [Feinberg, 2019]. Angeli et al. [2007] assume a zero rate when a reactant is absent, and the absence of negative cross-effects characterises mass-action kinetics [Craciun et al., 2020]. Proposition 2 derives this zero rate for a rate law that is shared across nets, given that learned weights are the same on every net.

However, for reactions the rate law is not local, as the reactivity of a bond depends on its molecule and on the available reagents, so Proposition 3 does not apply and we impose the enabling rule as a mask, which sets the rate of every transition that is not enabled to zero (Figure 2b). Such masks are standard for valence in molecule generation, where bonds are only added [Liu et al., 2018], and for enabled transitions in reinforcement learning on nets [Sachweh et al., 2024, Lassoued and Schwung, 2024]. This is the only way to stay valid for all weights for one firing at a time, as a not enabled bond-forming transition takes more tokens from a slack place than it holds (Appendix A).

4.2 The state-equation readout

In order to classify a reaction, NPF reads the change described by the state equation without the atom map that would place both markings on a single net. A local encoder, which is message passing along bonds for K rounds, assigns every atom and bond of each side a learned descriptor ψ , and a small multilayer perceptron maps the difference $r = \sum_{i \in V_B} \psi_B(i) - \sum_{j \in V_A} \psi_A(j)$ to the class. For all weights and every atom map, an atom whose surroundings within R bonds are the same on both sides cancels exactly against its partner, with $R = K$ for atom terms and $R = K + 1$ for bond terms (Proposition 3). What remains are the atoms whose bonds $C\sigma(\pi)$ or attributes change, those within R bonds of them, and the atoms that leave. Therefore, the readout r depends only on these atoms and is computed without π or $\sigma(\pi)$. A readout that pools each side, e.g. $\rho(\sum_B \psi, \sum_A \psi)$, is, in general, not invariant to a far decoration (Appendix A).

Solvents and catalysts without a partner do not cancel, so a participation gate $w_M \in (0, 1)$ for every precursor is trained on the maps of the mapper and moves them to a separate vector. Proposition 3 therefore only holds for the pure readout $w \equiv 1$. We introduce a second classifier that reads the firing vector $\hat{\sigma}$ of the mapper instead, with one learned term per transition that fires.

5 Reactions as firing sequences of valence and electron nets

The valence net A bond place B_{ij} holds the bond order $b_{ij} \in \{0, 1, \frac{3}{2}, 2, 3\}$, and a slack place S_i holds the free valence $s_i = h_i + \max(-q_i, 0) + c_i$ of atom i , from its hydrogens h_i and negative charge q_i , and a capacity of c_i of 1 for N, O, Cl, Br, and I, 2 for S and P, and 0 for all other elements. For every pair of atoms $i < j$ and every $\delta \in \{\frac{1}{2}, 1, \frac{3}{2}, 2, 3\}$, which is the difference between two bond orders, a transition increases b_{ij} by δ , while its reverse decreases it:

$$t_{ij}^{+\delta} : \delta S_i + \delta S_j \rightarrow \delta B_{ij}, \quad t_{ij}^{-\delta} : \delta B_{ij} \rightarrow \delta S_i + \delta S_j. \quad (2)$$

The P -invariants are spanned by the $|V|$ valence budgets $x^{(i)\top} m = \sum_j b_{ij} + s_i$. While the net conserves heavy atoms and valence budgets, it does not conserve hydrogen or charge, which decoding reads back from the free valence Appendix B.

Atom mapping by the minimum firing vector. An atom map π seats the product marking on the precursor places, while the state equation $P_\pi m_B - m_A = C\sigma(\pi)$ fixes the firing vector on every bond place with a seated end (Figure 3). We map by the cheapest firing vector, based on the principle of minimum chemical distance [Jochum et al., 1980], under a lexicographic cost without continuous parameters. The first level counts the bonds that are formed and broken, with a hydrogen on carbon as a bond of its own, and a hydrogen on a heteroatom, which exchanges with the medium, not counted. The second level then counts the changes of bond order on kept bonds and of formal charge. A branch and bound over the seatings that is bounded by linear assignments on the places of the net then finds the minimum and proves it optimal for 100.0 % of the Golden set within 60 s, in a median time of 0.02 s per reaction. Mappings that tie on both levels are ranked by a third level of three counts, chosen on 200 reactions from the Golden set (Appendix D.1). The mapper runs once per reaction before training and its firing vectors feed the token game and the second classifier.

Forward prediction by the token game. The product is the marking that an enabled firing sequence reaches from m_A . NPF plays the net one bond change at a time (Figure 2). From the current marking m , the next event is:

$$\Pr(t \mid m) = \frac{\lambda_{\theta,t}(m)[t \text{ enabled at } m]}{\lambda_{\theta,\text{STOP}}(m) + \sum_{t'} \lambda_{\theta,t'}(m)[t' \text{ enabled at } m]}, \quad (3)$$

the embedded jump chain of the stochastic net in Section 3, its sequence of markings without the waiting times, where STOP ends the game. A transition is enabled if allowed by the valence rule with half a token of tolerance on slack places (aromaticity), and each bond place is re-typed at most once. The rate law, which is a message-passing network with attention over the whole marking (Appendix B), ranks bond changes and is fitted to products that carry no times, so it is not a kinetic rate law. The targets are the firing vectors σ of the cheapest mappings that decode to the product, a set Σ^* , with $|\Sigma^*| \leq 8$. Because the loss sums over the whole set, the model never has to choose among equally cheap mappings. Furthermore, no order is needed as count-equivalent sequences reach the same marking. In training, we drop the model at a random point along a correct path, and reward it for putting probability on any correct next step. Beam search then keys partial predictions by firing vector, thereby merging count-equivalent sequences and adding their probabilities (Figure 2b). The resulting final marking still holds every precursor atom and is decoded into molecules by conservation rules, so by-products omitted in the input data set, come with the prediction. Note that the order of firings is valence bookkeeping and not a mechanism. Products carry no stereochemistry.

The electron net For mechanisms, we introduce a net whose tokens are electrons. Every atom has an atom place holding its non-bonding electrons, and every pair of atoms has a bond place holding the electrons they share, two for a single bond. A transition moves one electron, a fish-hook arrow, or a pair of electrons, a curly arrow, from an atom place into a bond place, or removes one from a bond place into an atom place. The total number of electrons is a P -invariant and no transition adds an atom, so, each step conserves atoms, protons, and electrons by construction.

In this case, the enabling rule is the octet rule, by which an electron may only move onto an atom with shell room available. The shell capacities and the possible formal charges are read per element from the training steps (Appendix B), and the guarantees hold relative to them. The STOP is enabled only when every formal charge is whole and within its window and every bond place holds a whole number of pairs, so every end marking is a Lewis structure. Restricting the transitions to pairs gives the arrow net as a subnet whose firings are the curly arrows of arrow pushing, and cannot express steps that move single electrons. The rate law and the token game are the same as in the forward model, a step fires at most 16 arrows and never undoes one, and the products are the end marking. Molecules enter both nets as Kekulé structures (Appendix B).

6 Experiments and Discussion

We test each task on standard benchmarks (Tables 1 to 4), described in Appendix B. For every model, we report the mean and sample standard deviation over three seeds unless stated otherwise, and baselines as reported by their authors on the same splits.

6.1 Reactions

Atom mapping. On the Golden set, scored as by Lin et al. [2021] on the 1 760 reactions with a curated map, the minimum firing vector reproduces the curated map, up to the symmetry of the molecules, for 88.81 %, and RXNMapper, a transformer pretrained on 2.8M reactions for 85.57 % ($p < 0.001$), and 88.53 against 85.58 % on the 1 560 reactions not used to choose the cost (see Appendix D.1). On SynRXN (Table 1), which compares reaction centres, our mapper is ahead of RXNMapper on Golden ($p = 0.003$) and its subset NatComm ($p = 0.01$). It is level with the graph-based learned mappers by Chen et al. [2024] and Nugmanov et al. [2022] on Golden ($p \geq 0.51$), non-significantly behind them on NatComm. It is behind all three learned mappers on USPTO-3k ($p < 0.001$). SynRXN Golden and NatComm contain 121 and 24 of the 200 reactions used to choose the cost, and without them our mapper scores 89.37 and 90.36 %, still ahead of RXNMapper ($p = 0.006$ and $p = 0.03$). On all three organic sets, our mapper is ahead of the rule-based RDT by Rahman et al. [2016]. On Recon3D it is ahead of the learned mappers, by at least 7.1 points ($p < 0.001$) and RDT by 2.9 ($p = 0.02$). On *E. coli*, RDT is ahead, although not significantly ($p = 0.06$), and we match RXNMapper. To break the tie on *E. coli*, we evaluated both on EnzymeMap [Heid et al., 2023b], where we establish a lead over RXNMapper with 88.70 against 77.92 % Table 10.

Reaction classification. On Schneider50k, the classifier that reads the firing vector of the mapper reaches 98.80 ± 0.04 % accuracy (Table 2), ahead of the generic network on the same firing vector (98.64 ± 0.09 %, $p = 0.01$) and of

Table 1: Atom mapping on SynRXN [Phan et al., 2026]. Best in **bold**, second underlined. Statistical tests and detailed numbers can be found in Table 9.

method	learned	Golden	NatComm	USPTO-3k	Recon3D	E. coli
RDT	rules	82.54	84.11	90.87	<u>54.97</u>	78.02
RXNMapper	yes	87.43	87.58	93.53	<u>48.69</u>	72.53
LocalMapper	yes	89.08	<u>92.67</u>	97.77	50.79	69.96
GraphormerMapper	yes	<u>89.59</u>	92.87	<u>95.10</u>	34.82	42.12
NPF, minimum firing vector	no	89.70	90.63	92.13	57.85	<u>72.89</u>

DRFP with a perceptron (95.52 ± 0.04 %). Reading the two sides of the reaction without any map at test time, the state-equation readout reaches 97.68 ± 0.09 %, level with the generic readout (97.74 ± 0.01 %, $p = 0.21$), and with all labels the cancellation of Proposition 3 does not change accuracy, while the firing vector adds 1.1 points, so the map of the net carries information that the two sides alone do not expose. As rules on the reaction centre assigned the classes of Schneider50k [Schneider et al., 2015], the EC numbers are the harder test.

Table 2: Reaction classification, accuracy and macro-F1 in %, $\pm$: sample standard deviation over n seeds, three for NPF on ECREACT and CARE. ECREACT, split of Liu et al. [2026], 4907 test reactions, baselines the mean over three runs. CARE task 2, easy split, 393 test reactions, baselines from Yang et al. [2024]. Best in **bold**, second underlined.

<i>Schneider50k (50 classes)</i>	<i>n</i>	accuracy		macro-F1						
DRFP + MLP	3	95.52 ± 0.04		95.47 ± 0.04						
PGNN, readout	3	97.67 ± 0.07		97.65 ± 0.07						
PGNN, firing vector	5	98.64 ± 0.09		98.63 ± 0.09						
NPF, readout	5	97.68 ± 0.09		97.67 ± 0.10						
NPF, firing vector	5	98.80 ± 0.04		98.80 ± 0.04						
<i>ECREACT, Enzyformer split</i>		EC4	EC3	EC2	EC1	<i>CARE task 2, easy</i>	EC4	EC3	EC2	EC1
BEC-Pred	–	76.9	81.2	85.8		CLIPZyme	12.2	39.9	61.8	79.9
DRFP + CLM	–	81.7	85.6	88.3		DRFP similarity	59.3	77.1	85.2	90.6
Synthcoder-DistilBERT	–	84.4	86.7	<u>90.9</u>		CREEP	39.4	66.4	79.9	92.9
Enzyformer	–	<u>84.6</u>	<u>88.2</u>	<u>90.9</u>		NPF, no map	<u>67.85</u>	82.27	89.74	95.76
		±0.39	±0.29	±0.39			±0.39	±0.29	±0.39	±0.59
NPF		75.75	90.20	92.45	95.40	NPF + mapper	70.23	<u>84.31</u>	<u>92.03</u>	96.78
		±0.18	±0.15	±0.23	±0.23		±1.59	±0.64	±0.78	±1.03
						CREEP + text	60.3	89.3	93.9	<u>96.7</u>

On ECREACT [Probst et al., 2022a], in the split of Liu et al. [2026], the state-equation readout predicts the EC number to the third level for 90.20 ± 0.15 % of the test reactions, 5.6 points ahead of the best retrained method, Enzyformer (84.6 %), and leads at EC levels 2 and 1 by 4.3 and 4.5 points. At the full EC number, which no baseline reports, it reaches 75.75 ± 0.18 %, where the 224 test reactions whose EC number never occurs in training cap any method at 95.4 %. On CARE, most EC numbers have four or fewer training reactions, here the classifier reaches 70.23 ± 1.59 % at the full EC number with the maps of the mapper and 67.85 ± 0.39 % without maps, against 59.3 % for DRFP similarity, the best method that reads only the reaction. CREEP with a text description of the reaction reaches 60.3 % at the full EC number and leads at EC levels 3 and 2 (89.3 and 93.9 against 84.31 and 92.03 % for NPF), while the structure of the reaction alone recovers the full EC number better than CREEP.

Forward prediction. On USPTO-480k [Jin et al., 2017], NPF trained on targets of the net predicts the recorded product first for 87.7 % of the 40 000 test reactions under the rule of Appendix B (Table 3), matching MAELLE (87.2 %), which learns the movement of the electrons, and above the graph-edit models MEGAN (86.3 %) and GTPN (83.2 %). Sequence models such as Graph2SMILES (90.3 %) and Molecular Transformer (88.6 %), as well as the electron-edit model NERF (90.7 %), remain ahead at top-1, and at top-5 NPF (93.7 %) is level with NERF (93.7 %) and MAELLE (93.9 %). Training NPF on the minimum firing vectors of the mapper instead of the supplied atom maps raises top-1 from 86.8 to 87.71 %, as on 10 % of the data over three seeds (Appendix D.3), so the model does not need external atom maps. With 1 % of the training data, the token game predicts the major product first for 67.44 % of the test reactions (Table 14). Without the enabling rule, accuracy is unchanged (87.6 %), but 5 out of the 40 000 predictions break the valence rule (Table 17), which the enabling rule prevents for every value of the weights. Trained on USPTO-480K, the network thus learns the valence rule almost perfectly by itself, but only the net guarantees it.

Table 3: Top- k accuracy comparison on USPTO-480K. Entries taken from the original papers, as collected by Xuan-Vu et al. [2026], are marked with † . NPF is scored as in Appendix B, one seed. With the enabling rule, every NPF prediction stays within the valence budgets of its atoms (Table 17).

method	prediction modality	top-1	top-3	top-5
Molecular Transformer † [Schwaller et al., 2019]	SMILES	0.886	0.935	0.942
Graph2SMILES † [Tu and Coley, 2022]	SMILES	0.903	0.940	0.948
MEGAN † [Sacha et al., 2021]	Graph edits	0.863	0.924	0.940
GTPN † [Do et al., 2019]	Graph edits	0.832	0.860	0.865
NERF † [Bi et al., 2021]	Electron edits	0.907	0.933	0.937
MAELLE [Xuan-Vu et al., 2026]	Electron flow	0.872	0.930	0.939
NPF, recorded maps (ours)	Token game	0.868	0.921	0.934
NPF, targets of the net (ours)	Token game	<u>0.877</u>	<u>0.927</u>	<u>0.937</u>
NPF, targets of the net, no enabling rule (ours)	Token game	<u>0.876</u>	<u>0.927</u>	<u>0.938</u>

Table 4: Top- k accuracy (%) on the FlowER test set for individual steps (162 002) and full pathways (28 049 reactions). A pathway counts as correct if some route to a recorded end product has every step in the top k . Steps from PMechDB and RMechDB are excluded. The upper limit reflects steps with more than one valid outcome. NPF ranks by beam probability. Baselines rank by sample frequency and come from Fig. 2 of Joung et al. [2025]. Best in **bold**, second underlined.

method	params	step, top- k				pathway, top- k			
		1	2	3	5	1	2	3	5
Molecular Transformer	12M	88.75	96.62	98.42	98.92	88.31	95.64	97.02	97.59
Graph2SMILES	18M	89.09	96.75	98.08	98.66	<u>92.51</u>	95.94	97.03	97.76
Graph2SMILES+H	18M	87.39	95.31	96.87	97.67	89.22	93.70	95.10	96.19
FlowER	7M	88.48	96.42	97.96	98.60	88.97	94.75	96.48	97.39
FlowER-large	16M	<u>89.74</u>	<u>97.40</u>	<u>98.66</u>	<u>99.13</u>	92.50	<u>96.89</u>	<u>98.15</u>	<u>98.61</u>
NPF, arrow net	7.3M	88.85 $\pm$ 0.04	96.13 $\pm$ 0.06	97.33 $\pm$ 0.07	97.71 $\pm$ 0.14	90.54 $\pm$ 0.05	94.20 $\pm$ 0.09	94.88 $\pm$ 0.08	95.19 $\pm$ 0.13
NPF, electron net	8.2M	90.47 $\pm$ 0.09	97.85 $\pm$ 0.08	99.08 $\pm$ 0.08	99.46 $\pm$ 0.14	94.49 $\pm$ 0.36	98.46 $\pm$ 0.21	99.21 $\pm$ 0.13	99.52 $\pm$ 0.16
upper limit		91.27	98.89	99.79	99.99	–	–	–	–

Reaction mechanisms. We use the elementary steps of FlowER [Joung et al., 2025] in their published split (Appendix B). Given the reactants of a step, a model predicts its products, and a prediction is correct if its canonical SMILES without atom maps and stereochemistry equals that of the recorded products. We report the top- k step accuracy and the top- k pathway accuracy of Joung et al. [2025], computed as in their evaluation script.

Every top-1 prediction of both nets is a valid molecule (Table 18), without a filter, while FlowER discards its invalid samples, about 5 %, before ranking, and 70 to 79 % of the top-1 predictions of the sequence models are valid. Every prediction of both nets conserves atoms, protons and electrons, which 17 to 33 % of the predictions of the sequence models do. The electron net predicts the recorded step first for 90.47 % of test steps (Table 4), ahead of every baseline, the best being FlowER-large (89.74 %), and within 0.8 points of the 91.27 % upper limit. The electron net leads at every k with 8.2M parameters, against 16M for FlowER-large. On whole reactions it recovers the pathway at top-1 for 94.49 $\pm$ 0.36 % (Table 4), against 92.51 % for Graph2SMILES and 92.50 % for FlowER-large, the best baselines, and 88.97 % for FlowER.

The arrow net, which moves only pairs, scores 88.85 % top-1, and its difference to the electron net comes from the 1.79 % of test steps that move single electrons (Appendix D.4).

6.2 What does each Petri component contribute?

We evaluated, on Schneider50k for forward prediction and classification, the proposed Petri net architecture against counterparts of equal size but without each component we introduced (Appendix D.5). Playing the net one bond change at a time, as the stochastic net from Section 3 fires, raises the greedy top-1 from 79.72 to 93.34 %. Enabling, introduced in Section 4.1, makes every prediction valence-valid for every value of the weights (Proposition 4) at no cost in accuracy ($p = 0.22$), whereas the generic one-shot model breaks a budget in 2.79 %, and the token game without the mask in 0.02 %, and in 0.16 % after a shift to 5 000 USPTO-480K test reactions. The pure state equation readout ($w \equiv 1$, Section 4.2) is invariant to an inserted far methyl group. When trained on subsamples of 1 000 and 250 reactions, the pure readout is ahead of its generic counterpart, the firing vector (Section 3) only on 250. A D-MPNN on the condensed

graph of reaction by Heid and Green [2021] with the same maps is behind the firing vector except on larger molecules, where the two are level (Appendix D.2).

7 Conclusion

In this work, we asked what a neural network looks like when its outputs obey the rules of a Petri net for every value of its weights. The theory answers that it has to keep the firing form and the enabling rule, while it can only learn the rate law or a readout of the firing vector. On the valence net, atom mapping, reaction classification, and forward prediction become three tasks on a firing vector. The minimum firing vector maps atoms without learned weights. It is competitive across a range of reaction data sources, and its tied optima replace learned atom maps as the training targets of the forward model. On USPTO-480K, NPF trained on these targets is level with or ahead of the electron-flow model MAELLE and the graph-edit models, and ahead of the NPF trained on the supplied maps. The state-equation readout predicts EC numbers ahead of published methods on ECREACT and at the full EC number on CARE. On the electron net, the token game predicts the elementary steps of FlowER ahead of published baselines. The enabling mask makes validity a guarantee at no cost in accuracy, while the readout and the firing vector gain on small training sets but no on distribution shifts in molecule size.

Acknowledgements

We would like to thank Dr. Alma Ademovic Tahirovic for sharing her insights and the useful and enjoyable discussions on neural Petri nets as applied in her own work.

Reproducibility statement

We have taken care to provide training data, scripts, and logs together with the source code to assist reproducibility. The source code, data, scripts, and logs are available at <https://github.com/daenuprobst/npf>. Proofs are in Appendix A and Appendix B describes the data, splits, hyperparameters, and metrics.

References

- Mohammed Sharafath Abdul Hameed, Sofiene Lassoued, and Andreas Schwung. Learnable petri net neural network using max-plus algebra. *Machine Learning and Knowledge Extraction*, 7(3):100, 2025. ISSN 2504-4990. doi:10.3390/make7030100. URL <http://dx.doi.org/10.3390/make7030100>.
- Alma Ademovic Tahirovic, David Angeli, Adnan Tahirovic, and Goran Strbac. Petri graph neural networks advance learning higher order multimodal complex interactions in graph structured data. *Scientific Reports*, 15(1), May 2025. ISSN 2045-2322. doi:10.1038/s41598-025-01856-9. URL <http://dx.doi.org/10.1038/s41598-025-01856-9>.
- Mohammad Ali, Yuta Mizuno, Seiji Akiyama, Yuuya Nagata, and Tamiki Komatsuzaki. Enumeration approach to atom-to-atom mapping accelerated by ising computing. *Journal of Chemical Information and Modeling*, 65(4):1901–1910, February 2025. ISSN 1549-960X. doi:10.1021/acs.jcim.4c01871. URL <http://dx.doi.org/10.1021/acs.jcim.4c01871>.
- Jakob L. Andersen, Sissel Banke, Rolf Fagerberg, Christoph Flamm, Daniel Merkle, and Peter F. Stadler. Pathway realizability in chemical networks. *Journal of Computational Biology*, 32(2):164–187, February 2025. ISSN 1557-8666. doi:10.1089/cmb.2024.0521. URL <http://dx.doi.org/10.1089/cmb.2024.0521>.
- David Angeli, Patrick De Leenheer, and Eduardo Sontag. *A Petri Net Approach to Persistence Analysis in Chemical Reaction Networks*, page 181–216. Springer Berlin Heidelberg, 2007. ISBN 9783540719885. doi:10.1007/978-3-540-71988-5_9. URL http://dx.doi.org/10.1007/978-3-540-71988-5_9.
- Maryam Astero and Juho Rousu. Enhancing atom mapping with multitask learning and symmetry-aware deep graph matching. *Journal of Cheminformatics*, 17(1), May 2025. ISSN 1758-2946. doi:10.1186/s13321-025-01030-3. URL <http://dx.doi.org/10.1186/s13321-025-01030-3>.
- John C. Baez and Jacob Biamonte. Quantum techniques for stochastic mechanics. 2019. doi:10.48550/ARXIV.1209.3632. URL <https://arxiv.org/abs/1209.3632>.
- Hangrui Bi, Hengyi Wang, Chence Shi, Connor Coley, Jian Tang, and Hongyu Guo. Non-autoregressive electron redistribution modeling for reaction prediction. In Marina Meila and Tong Zhang, editors, *Proceedings of the 38th International Conference on Machine Learning*, volume 139 of *Proceedings of Machine Learning Research*, pages 904–913. PMLR, 18–24 Jul 2021. URL <https://proceedings.mlr.press/v139/bi21a.html>.

- John Bradshaw, Matt J. Kusner, Brooks Paige, Marwin H. S. Segler, and José Miguel Hernández-Lobato. A generative model for electron paths, 2018. URL <https://arxiv.org/abs/1805.10970>.
- Shuan Chen and Yousung Jung. A generalized-template-based graph neural network for accurate organic reactivity prediction. *Nature Machine Intelligence*, 4(9):772–780, 2022. ISSN 2522-5839. doi:10.1038/s42256-022-00526-z. URL <http://dx.doi.org/10.1038/s42256-022-00526-z>.
- Shuan Chen, Sunggi An, Ramil Babazade, and Yousung Jung. Precise atom-to-atom mapping for organic reactions via human-in-the-loop machine learning. *Nature Communications*, 15(1), March 2024. ISSN 2041-1723. doi:10.1038/s41467-024-46364-y. URL <http://dx.doi.org/10.1038/s41467-024-46364-y>.
- Shuan Chen, Kye Sung Park, Taewan Kim, Sunkyu Han, and Yousung Jung. Predicting chemical reaction outcomes based on electron movements using machine learning, 2025. URL <https://arxiv.org/abs/2503.10197>.
- Connor W. Coley, Wengong Jin, Luke Rogers, Timothy F. Jamison, Tommi S. Jaakkola, William H. Green, Regina Barzilay, and Klavs F. Jensen. A graph-convolutional neural network model for the prediction of chemical reactivity. *Chemical Science*, 10(2):370–377, 2019. ISSN 2041-6539. doi:10.1039/c8sc04228d. URL <http://dx.doi.org/10.1039/c8sc04228d>.
- Gheorghe Craciun, Matthew D. Johnston, Gábor Szederkényi, Elisa Tonello, János Tóth, and Polly and Y. Yu. Realizations of kinetic differential equations. *Mathematical Biosciences and Engineering*, 17(1):862–892, 2020. ISSN 1551-0018. doi:10.3934/mbe.2020046. URL <http://dx.doi.org/10.3934/mbe.2020046>.
- I. Csiszar. i -divergence geometry of probability distributions and minimization problems. *The Annals of Probability*, 3(1), February 1975. ISSN 0091-1798. doi:10.1214/aop/1176996454. URL <http://dx.doi.org/10.1214/aop/1176996454>.
- Alexander Dack, Benjamin Qureshi, Thomas E. Ouldrige, and Tomislav Plesa. Recurrent neural chemical reaction networks that approximate arbitrary dynamics. *Cell Systems*, 17(5):101572, May 2026. ISSN 2405-4712. doi:10.1016/j.cels.2026.101572. URL <http://dx.doi.org/10.1016/j.cels.2026.101572>.
- René David and Hassane Alla. *Discrete, Continuous, and Hybrid Petri Nets*. Springer Berlin Heidelberg, 2010. ISBN 9783642106699. doi:10.1007/978-3-642-10669-9. URL <http://dx.doi.org/10.1007/978-3-642-10669-9>.
- Kien Do, Truyen Tran, and Svetha Venkatesh. Graph transformation policy network for chemical reaction prediction. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining, KDD '19*, page 750–760, New York, NY, USA, 2019. Association for Computing Machinery. ISBN 9781450362016. doi:10.1145/3292500.3330958. URL <https://doi.org/10.1145/3292500.3330958>.
- Felix A. Döppel and Martin Votsmeier. Robust mechanism discovery with atom conserving chemical reaction neural networks. *Proceedings of the Combustion Institute*, 40(1-4):105507, 2024. ISSN 1540-7489. doi:10.1016/j.proci.2024.105507. URL <http://dx.doi.org/10.1016/j.proci.2024.105507>.
- James Dugundji and Ivar Ugi. An algebraic model of constitutional chemistry as a basis for chemical computer programs. In *Computers in Chemistry*, pages 19–64, Berlin, Heidelberg, 1973. Springer Berlin Heidelberg. ISBN 978-3-540-38510-3.
- Martin Feinberg. *Foundations of Chemical Reaction Network Theory*. Springer International Publishing, 2019. ISBN 9783030038588. doi:10.1007/978-3-030-03858-8. URL <http://dx.doi.org/10.1007/978-3-030-03858-8>.
- Eric L. First, Chrysanthos E. Gounaris, and Christodoulos A. Floudas. Stereochemically consistent reaction mapping and identification of multiple reaction mechanisms through integer linear optimization. *Journal of Chemical Information and Modeling*, 52(1):84–92, December 2011. ISSN 1549-960X. doi:10.1021/ci200351b. URL <http://dx.doi.org/10.1021/ci200351b>.
- Luis L. Fonseca, Reinhard C. Laubenbacher, and Lucas Böttcher. Learning dynamical systems with biochemically informed neural ordinary differential equations, 2026. URL <https://arxiv.org/abs/2605.24170>.
- Shinsaku Fujita. Description of organic reactions based on imaginary transition structures. 1. introduction of new concepts. *Journal of Chemical Information and Computer Sciences*, 26(4):205–212, November 1986. ISSN 1520-5142. doi:10.1021/ci00052a009. URL <http://dx.doi.org/10.1021/ci00052a009>.
- Luca Gerosa, Bart R.B. Haverkorn van Rijsewijk, Dimitris Christodoulou, Karl Kochanowski, Thomas S.B. Schmidt, Elad Noor, and Uwe Sauer. Pseudo-transition analysis identifies the key regulators of dynamic metabolic adaptations from steady-state data. *Cell Systems*, 1(4):270–282, October 2015. ISSN 2405-4712. doi:10.1016/j.cels.2015.09.008. URL <http://dx.doi.org/10.1016/j.cels.2015.09.008>.
- Bart R B Haverkorn van Rijsewijk, Annik Nanchen, Sophie Nallet, Roelco J Kleijn, and Uwe Sauer. Large-scale 13c-flux analysis reveals distinct transcriptional control of respiratory and fermentative metabolism in escherichia coli. *Molecular Systems Biology*, 7(1), March 2011. ISSN 1744-4292. doi:10.1038/msb.2011.9. URL <http://dx.doi.org/10.1038/msb.2011.9>.

- Esther Heid and William H. Green. Machine learning of reaction properties via learned representations of the condensed graph of reaction. *Journal of Chemical Information and Modeling*, 62(9):2101–2110, November 2021. ISSN 1549-960X. doi:10.1021/acs.jcim.1c00975. URL <http://dx.doi.org/10.1021/acs.jcim.1c00975>.
- Esther Heid, Kevin P. Greenman, Yunsie Chung, Shih-Cheng Li, David E. Graff, Florence H. Vermeire, Haoyang Wu, William H. Green, and Charles J. McGill. Chemprop: A machine learning package for chemical property prediction. *Journal of Chemical Information and Modeling*, 64(1):9–17, December 2023a. ISSN 1549-960X. doi:10.1021/acs.jcim.3c01250. URL <http://dx.doi.org/10.1021/acs.jcim.3c01250>.
- Esther Heid, Daniel Probst, William H. Green, and Georg K. H. Madsen. EnzymeMap: curation, validation and data-driven prediction of enzymatic reactions. *Chemical Science*, 14(48):14229–14242, 2023b. doi:10.1039/d3sc02048g.
- Anders K. Holm, Lars M. Blank, Marco Oldiges, Andreas Schmid, Christian Solem, Peter R. Jensen, and Goutham N. Vemuri. Metabolic and transcriptional response to cofactor perturbations in escherichia coli. *Journal of Biological Chemistry*, 285(23):17498–17506, 2010. ISSN 0021-9258. doi:10.1074/jbc.M109.095570. URL <http://dx.doi.org/10.1074/jbc.M109.095570>.
- Masanobu Horie and Naoto Mitsume. Graph neural PDE solvers with conservation and similarity-equivariance. In Ruslan Salakhutdinov, Zico Kolter, Katherine Heller, Adrian Weller, Nuria Oliver, Jonathan Scarlett, and Felix Berkenkamp, editors, *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 18785–18814. PMLR, 21–27 Jul 2024. URL <https://proceedings.mlr.press/v235/horie24a.html>.
- Liang Hu, Zhenyu Liu, Weifei Hu, Yueyang Wang, Jianrong Tan, and Fei Wu. Petri-net-based dynamic scheduling of flexible manufacturing system via deep reinforcement learning with graph convolutional network. *Journal of Manufacturing Systems*, 55:1–14, April 2020. ISSN 0278-6125. doi:10.1016/j.jmsy.2020.02.004. URL <http://dx.doi.org/10.1016/j.jmsy.2020.02.004>.
- Ross Irwin, Spyridon Dimitriadis, Jiazhen He, and Esben Jannik Bjerrum. Chemformer: a pre-trained transformer for computational chemistry. *Machine Learning: Science and Technology*, 3(1):015022, January 2022. ISSN 2632-2153. doi:10.1088/2632-2153/ac3ffb. URL <http://dx.doi.org/10.1088/2632-2153/ac3ffb>.
- Nobuyoshi Ishii, Kenji Nakahigashi, Tomoya Baba, Martin Robert, Tomoyoshi Soga, Akio Kanai, Takashi Hirasawa, Miki Naba, Kenta Hirai, Aminul Hoque, Pei Yee Ho, Yuji Kakazu, Kaori Sugawara, Saori Igarashi, Satoshi Harada, Takeshi Masuda, Naoyuki Sugiyama, Takashi Togashi, Miki Hasegawa, Yuki Takai, Katsuyuki Yugi, Kazuharu Arakawa, Nayuta Iwata, Yoshihiro Toya, Yoichi Nakayama, Takaaki Nishioka, Kazuyuki Shimizu, Hirotada Mori, and Masaru Tomita. Multiple high-throughput analyses monitor the response of *e. coli* to perturbations. *Science*, 316(5824):593–597, April 2007. ISSN 1095-9203. doi:10.1126/science.1132067. URL <http://dx.doi.org/10.1126/science.1132067>.
- Weiqi Ji and Sili Deng. Autonomous discovery of unknown reaction pathways from data by chemical reaction neural network. *The Journal of Physical Chemistry A*, 125(4):1082–1092, January 2021. ISSN 1520-5215. doi:10.1021/acs.jpca.0c09316. URL <http://dx.doi.org/10.1021/acs.jpca.0c09316>.
- Wengong Jin, Connor W. Coley, Regina Barzilay, and Tommi Jaakkola. Predicting organic reaction outcomes with weisfeiler-lehman network. In *Proceedings of the 31st International Conference on Neural Information Processing Systems*, NIPS’17, page 2604–2613, Red Hook, NY, USA, 2017. Curran Associates Inc. ISBN 9781510860964.
- Clemens Jochum, Johann Gasteiger, and Ivar Ugi. The principle of minimum chemical distance (pmcd). *Angewandte Chemie International Edition in English*, 19(7):495–505, 1980. ISSN 0570-0833. doi:10.1002/anie.198004953. URL <http://dx.doi.org/10.1002/anie.198004953>.
- Joonyoung F. Joong, Mun Hong Fong, Nicholas Casetti, Jordan P. Liles, Ne S. Dassanayake, and Connor W. Coley. Electron flow matching for generative reaction mechanism prediction. *Nature*, 645(8079):115–123, August 2025. ISSN 1476-4687. doi:10.1038/s41586-025-09426-9. URL <http://dx.doi.org/10.1038/s41586-025-09426-9>.
- Tim Kircher, Felix A. Döppel, and Martin Votsmeier. Global reaction neural networks with embedded stoichiometry and thermodynamics for learning kinetics from reactor data. *Chemical Engineering Journal*, 485:149863, April 2024. ISSN 1385-8947. doi:10.1016/j.cej.2024.149863. URL <http://dx.doi.org/10.1016/j.cej.2024.149863>.
- Ina Koch. Petri nets – a mathematical formalism to analyze chemical reaction networks. *Molecular Informatics*, 29(12): 838–843, November 2010. ISSN 1868-1751. doi:10.1002/minf.201000086. URL <http://dx.doi.org/10.1002/minf.201000086>.
- Greg Landrum, Paolo Tosco, Ricardo Rodriguez, Brian Kelley, David Cosgrove, Riccardo Vianello, sriniker, Peter Gedeck, Gareth Jones, Dan Nealschneider, Eisuke Kawashima, NadineSchneider, tadhurst cdd, Andrew Dalke, Niels Maeder, Matt Swain, Yakov Pechersky, Brian Cole, Kevin Boyd, Samo Turk, Aleksandr Savelev, Rachel Walker, Alain Vaucher, Maciej Wójcikowski, Hussein Faara, Ichiru Take, Vincent F. Scalfani, Steven Kearnes, Kazuya

- Ujihara, and Daniel Probst. rdkit/rdkit: 2026_03_6 (q1 2026) release, 2026. URL <https://zenodo.org/doi/10.5281/zenodo.591637>.
- Sofiene Lassoued and Andreas Schwung. Introducing petrirl: An innovative framework for jssp resolution integrating petri nets and event-based reinforcement learning. *Journal of Manufacturing Systems*, 74:690–702, 2024. ISSN 0278-6125. doi:10.1016/j.jmsy.2024.04.028. URL <http://dx.doi.org/10.1016/j.jmsy.2024.04.028>.
- Mario Latendresse, Jeremiah P. Malerich, Mike Travers, and Peter D. Karp. Accurate atom-mapping computation for biochemical reactions. *Journal of Chemical Information and Modeling*, 52(11):2970–2982, October 2012. ISSN 1549-960X. doi:10.1021/ci3002217. URL <http://dx.doi.org/10.1021/ci3002217>.
- Arkadii Lin, Natalia Dyubankova, Timur I. Madzhidov, Ramil I. Nugmanov, Jonas Verhoeven, Timur R. Gimadiev, Valentina A. Afonina, Zarina Ibragimova, Assima Rakhimbekova, Pavel Sidorov, Andrei Gedich, Rail Suleymanov, Ravil Mukhametgaleev, Joerg Wegner, Hugo Ceulemans, and Alexandre Varnek. Atom-to-atom mapping: A benchmarking study of popular mapping algorithms and consensus strategies. *Molecular Informatics*, 41(4), November 2021. ISSN 1868-1751. doi:10.1002/minf.202100138. URL <http://dx.doi.org/10.1002/minf.202100138>.
- Qi Liu, Miltiadis Allamanis, Marc Brockschmidt, and Alexander Gaunt. Constrained graph variational autoencoders for molecule design. In S. Bengio, H. Wallach, H. Larochelle, K. Grauman, N. Cesa-Bianchi, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 31. Curran Associates, Inc., 2018. URL https://proceedings.neurips.cc/paper_files/paper/2018/file/b8a03c5c15fcfa8dae0b03351eb1742f-Paper.pdf.
- Tiantao Liu, Jiangcheng Xu, Xinke Zhan, Shaolong Lin, and Shirley W. I. Siu. Enzyformer: a two-stage pretrained model for enzymatic retrosynthesis. *Journal of Cheminformatics*, 18:35, 2026. doi:10.1186/s13321-026-01164-y.
- Christopher P. Long and Maciek R. Antoniewicz. Metabolic flux responses to deletion of 20 core enzymes reveal flexibility and limits of e. coli metabolism. *Metabolic Engineering*, 55:249–257, 2019. ISSN 1096-7176. doi:10.1016/j.ymben.2019.08.003. URL <http://dx.doi.org/10.1016/j.ymben.2019.08.003>.
- Daniel Mark Lowe. *Extraction of chemical structures and reactions from the literature*. PhD thesis, 2012. URL <https://www.repository.cam.ac.uk/handle/1810/244727>.
- Martin Mann, Feras Nahar, Norah Schnorr, Rolf Backofen, Peter F Stadler, and Christoph Flamm. Atom mapping with constraint programming. *Algorithms for Molecular Biology*, 9(1), November 2014. ISSN 1748-7188. doi:10.1186/s13015-014-0023-3. URL <http://dx.doi.org/10.1186/s13015-014-0023-3>.
- Joselito Medina-Marin, Maria Guadalupe Serna-Diaz, Norberto Hernandez-Romero, Juan Carlos Seck-Tuoh-Mora, and Irving Barragan-Vite. A proposal based on petri nets and artificial neural networks for modeling biotechnological process. In *Proceedings of the 35th European Modeling & Simulation Symposium, EMSS, EMSS 2023*. CAL-TEK srl, 2023. doi:10.46354/i3m.2023.emss.042. URL <http://dx.doi.org/10.46354/i3m.2023.emss.042>.
- Hernán Melgratti, Claudio Antares Mezzina, and G. Michele Pinna. A petri net view of covalent bonds. *Theoretical Computer Science*, 908:89–119, March 2022. ISSN 0304-3975. doi:10.1016/j.tcs.2022.01.013. URL <http://dx.doi.org/10.1016/j.tcs.2022.01.013>.
- Ziqiao Meng, Peilin Zhao, Yang Yu, and Irwin King. Doubly Stochastic Graph-Based Non-Autoregressive Reaction Prediction. In *International Joint Conference on Artificial Intelligence*, pages 4064–4072, 2023. doi:10.24963/IJCAI.2023/452. URL <https://mlanthology.org/ijcai/2023/meng2023ijcai-doubly/>.
- Molloy. Performance analysis using stochastic petri nets. *IEEE Transactions on Computers*, C-31(9):913–917, 1982. ISSN 0018-9340. doi:10.1109/tc.1982.1676110. URL <http://dx.doi.org/10.1109/TC.1982.1676110>.
- T. Murata. Petri nets: Properties, analysis and applications. *Proceedings of the IEEE*, 77(4):541–580, April 1989. ISSN 0018-9219. doi:10.1109/5.24143. URL <http://dx.doi.org/10.1109/5.24143>.
- Rajiv Teja Nagipogu and John H. Reif. Neural crns: A natural implementation of learning in chemical reaction networks. *ACS Synthetic Biology*, 14(10):3899–3912, 2025. ISSN 2161-5063. doi:10.1021/acssynbio.5c00099. URL <http://dx.doi.org/10.1021/acssynbio.5c00099>.
- Ramil Nugmanov, Natalia Dyubankova, Andrey Gedich, and Joerg Kurt Wegner. Bidirectional graphormer for reactivity understanding: Neural network trained to reaction atom-to-atom mapping task. *Journal of Chemical Information and Modeling*, 62(14):3307–3315, 2022. ISSN 1549-960X. doi:10.1021/acs.jcim.2c00344. URL <http://dx.doi.org/10.1021/acs.jcim.2c00344>.
- Jeffrey D. Orth, R. M. T. Fleming, and Bernhard Ø. Palsson. Reconstruction and use of microbial metabolic networks: the core *escherichia coli* metabolic model as an educational guide. *EcoSal Plus*, 4(1), December 2010. ISSN 2324-6200. doi:10.1128/ecosalplus.10.2.1. URL <http://dx.doi.org/10.1128/ecosalplus.10.2.1>.

- Jeffrey D Orth, Tom M Conrad, Jessica Na, Joshua A Lerman, Hojung Nam, Adam M Feist, and Bernhard Ø Palsson. A comprehensive genome-scale reconstruction of escherichia coli metabolism—2011. *Molecular Systems Biology*, 7(1), October 2011. ISSN 1744-4292. doi:10.1038/msb.2011.65. URL <http://dx.doi.org/10.1038/msb.2011.65>.
- Carl Petri and Wolfgang Reisig. Petri net. *Scholarpedia*, 3(4):6477, 2008. ISSN 1941-6016. doi:10.4249/scholarpedia.6477. URL <http://dx.doi.org/10.4249/scholarpedia.6477>.
- Tieu-Long Phan, Nhu-Ngoc Nguyen Song, and Peter F. Stadler. Synrxn: An open benchmark and curated dataset for computational reaction modeling. *Scientific Data*, 13(1), 2026. ISSN 2052-4463. doi:10.1038/s41597-026-07260-w. URL <http://dx.doi.org/10.1038/s41597-026-07260-w>.
- Daniel Probst, Matteo Manica, Yves Gaetan Nana Teukam, Alessandro Castrogiovanni, Federico Paratore, and Teodoro Laino. Biocatalysed synthesis planning using data-driven learning. *Nature Communications*, 13:964, 2022a. doi:10.1038/s41467-022-28536-w.
- Daniel Probst, Philippe Schwaller, and Jean-Louis Reymond. Reaction classification and yield prediction using the differential reaction fingerprint drfp. *Digital Discovery*, 1(2):91–97, 2022b. ISSN 2635-098X. doi:10.1039/d1dd00006c. URL <http://dx.doi.org/10.1039/D1DD00006C>.
- Dimitris C. Psychogios and Lyle H. Ungar. A hybrid neural network-first principles approach to process modeling. *AIChE Journal*, 38(10):1499–1511, October 1992. ISSN 1547-5905. doi:10.1002/aic.690381003. URL <http://dx.doi.org/10.1002/aic.690381003>.
- Syed Asad Rahman, Gilliean Torrance, Lorenzo Baldacci, Sergio Martínez Cuesta, Franz Fenninger, Nimish Gopal, Saket Choudhary, John W. May, Gemma L. Holliday, Christoph Steinbeck, and Janet M. Thornton. Reaction decoder tool (rdt): extracting features from chemical reactions. *Bioinformatics*, 32(13):2065–2066, February 2016. ISSN 1367-4803. doi:10.1093/bioinformatics/btw096. URL <http://dx.doi.org/10.1093/bioinformatics/btw096>.
- Mikołaj Sacha, Mikołaj Błaż, Piotr Byrski, Paweł Dąbrowski-Tumański, Mikołaj Chromiński, Rafał Loska, Paweł Włodarczyk-Pruszyński, and Stanisław Jastrzębski. Molecule edit graph attention network: Modeling chemical reactions as sequences of graph edits. *Journal of Chemical Information and Modeling*, 61(7):3273–3284, 2021. ISSN 1549-960X. doi:10.1021/acs.jcim.1c00537. URL <http://dx.doi.org/10.1021/acs.jcim.1c00537>.
- Timon Sachweh, Pierre Haritz, and Thomas Liebig. Using petri nets as an integrated constraint mechanism for reinforcement learning tasks. In *2024 IEEE Intelligent Vehicles Symposium (IV)*, page 1686–1692. IEEE, 2024. doi:10.1109/iv55156.2024.10588380. URL <http://dx.doi.org/10.1109/IV55156.2024.10588380>.
- Nadine Schneider, Daniel M. Lowe, Roger A. Sayle, and Gregory A. Landrum. Development of a novel fingerprint for chemical reactions and its application to large-scale reaction classification and similarity. *Journal of Chemical Information and Modeling*, 55(1):39–53, January 2015. ISSN 1549-960X. doi:10.1021/ci5006614. URL <http://dx.doi.org/10.1021/ci5006614>.
- Philippe Schwaller, Teodoro Laino, Théophile Gaudin, Peter Bolgar, Christopher A. Hunter, Costas Bekas, and Alpha A. Lee. Molecular transformer: A model for uncertainty-calibrated chemical reaction prediction. *ACS Central Science*, 5(9):1572–1583, August 2019. ISSN 2374-7951. doi:10.1021/acscentsci.9b00576. URL <http://dx.doi.org/10.1021/acscentsci.9b00576>.
- Philippe Schwaller, Benjamin Hoover, Jean-Louis Reymond, Hendrik Strobelt, and Teodoro Laino. Extraction of organic chemistry grammar from unsupervised learning of chemical reactions. *Science Advances*, 7(15), April 2021a. ISSN 2375-2548. doi:10.1126/sciadv.abe4166. URL <http://dx.doi.org/10.1126/sciadv.abe4166>.
- Philippe Schwaller, Daniel Probst, Alain C. Vaucher, Vishnu H. Nair, David Kreutter, Teodoro Laino, and Jean-Louis Reymond. Mapping the space of chemical reactions using attention-based neural networks. *Nature Machine Intelligence*, 3(2):144–152, January 2021b. ISSN 2522-5839. doi:10.1038/s42256-020-00284-w. URL <http://dx.doi.org/10.1038/s42256-020-00284-w>.
- Patrick Obin Sturm and Anthony S. Wexler. Conservation laws in a neural network architecture: enforcing the atom balance of a julia-based photochemical model (v0.2.0). *Geoscientific Model Development*, 15(8):3417–3431, April 2022. ISSN 1991-9603. doi:10.5194/gmd-15-3417-2022. URL <http://dx.doi.org/10.5194/gmd-15-3417-2022>.
- Igor V. Tetko, Pavel Karpov, Ruud Van Deursen, and Guillaume Godin. State-of-the-art augmented nlp transformer models for direct and single-step retrosynthesis. *Nature Communications*, 11(1), November 2020. ISSN 2041-1723. doi:10.1038/s41467-020-19266-y. URL <http://dx.doi.org/10.1038/s41467-020-19266-y>.
- Zhengkai Tu and Connor W. Coley. Permutation invariant graph-to-sequence model for template-free retrosynthesis and reaction prediction. *Journal of Chemical Information and Modeling*, 62(15):3503–3513, 2022. ISSN 1549-960X. doi:10.1021/acs.jcim.2c00321. URL <http://dx.doi.org/10.1021/acs.jcim.2c00321>.

- A. Varnek, D. Fourches, F. Hoonakker, and V. P. Solov'ev. Substructural fragments: an universal language to encode reactions, molecular and supramolecular structures. *Journal of Computer-Aided Molecular Design*, 19(9-10):693–703, 2005. ISSN 1573-4951. doi:10.1007/s10822-005-9008-0. URL <http://dx.doi.org/10.1007/s10822-005-9008-0>.
- Nguyen Xuan-Vu, Octavian Susanu, Daniel Armstrong, and Philippe Schwaller. Mechanistic reaction prediction via discrete flow matching on graph-structured electron occupation, 2026. URL <https://arxiv.org/abs/2608.27429>.
- Jason Yang, Ariane Mora, Shengchao Liu, Bruce J. Wittmann, Anima Anandkumar, Frances H. Arnold, and Yisong Yue. CARE: a benchmark suite for the classification and retrieval of enzymes. In *Advances in Neural Information Processing Systems*, volume 37, 2024. doi:10.52202/079017-0101.
- Zipeng Zhong, Jie Song, Zunlei Feng, Tiantao Liu, Lingxiang Jia, Shaolun Yao, Min Wu, Tingjun Hou, and Mingli Song. Root-aligned smiles: a tight representation for chemical reaction prediction. *Chemical Science*, 13(31):9023–9034, 2022. ISSN 2041-6539. doi:10.1039/d2sc02763a. URL <http://dx.doi.org/10.1039/d2sc02763a>.

A Proofs

Nets, markings, enabling, the incidence matrix C , and the attributes e_p and a_t are those introduced in Section 3. For the consumers of p , we write $p^\bullet = \{t : \text{Pre}(p, t) > 0\}$. If $\bullet t \cap t^\bullet = \emptyset$ for all t , the net is pure, meaning no transition takes from and gives to the same place. $\mathbf{1}_p$ is the unit vector of place p . On the valence net of the precursor atoms V , we write $b_{ij} = m_B$ for the bond order and $s_i = m_{S_i}$ for free valence. Transitions are $t_{ij}^{+\delta} : \delta S_i + \delta S_j \rightarrow \delta B_{ij}$ and their reverse is $t_{ij}^{-\delta}$, for every pair $i < j$ of atoms and every $\delta \in \{\frac{1}{2}, 1, \frac{3}{2}, 2, 3\}$. All columns of one pair are multiples of $\mathbf{1}_{B_{ij}} - \mathbf{1}_{S_i} - \mathbf{1}_{S_j}$, so C has rank $\binom{|V|}{2}$ and $\ker C^\top$ is spanned by the $|V|$ valence budgets $x^{(i)} = \mathbf{1}_{S_i} + \sum_j \mathbf{1}_{B_{ij}}$, with $x^{(i)\top} m = s_i + \sum_j b_{ij}$. Arc weights and markings are all multiples of $\frac{1}{2}$, so doubling them gives a discrete net. An atom map π seats the product marking on the precursor places as $P_\pi m_B$ (see Section 3). The implementation masks transitions that are not enabled with a log-rate of -10^4 instead of $-\infty$, realising Proposition 4 when the log-rate of STOP exceeds -10^3 .

The inverse problem uses the two orthogonal decompositions

$$\mathbb{R}^T = \text{im} C^\top \oplus \ker C, \quad \mathbb{R}^P = \text{im} C \oplus \ker C^\top, \quad (4)$$

and the pseudoinverse C^+ , where C^+C and $I - C^+C$ project orthogonally onto $\text{im} C^\top$ and $\ker C$. Therefore, every σ splits into one part in $\text{im} C^\top$, which is determined by the observed change as $C^+(m - m_0)$, and another part containing cycles in $\ker C$. im , the image, is all that can be produced by the matrix, while $\ker$, the kernel, is all that it maps to zero. In chemistry terms, $\text{im} C$ holds the changes of bonds and free valence that bond changes can cause, $\ker C^\top$ the valence budgets, $\ker C$ the bond changes that cancel each other out, and $\text{im} C^\top$ the part of the bond changes determined by the products.

A.1 Conservation is equivalent to the firing form

Proposition 1 (The conservation is equivalent to the firing form). *Assume the P -invariants span $\ker C^\top$. An update $m \mapsto m + u(m)$ satisfies $x^\top(m + u(m)) = x^\top m$ for all markings m and all P -invariants x iff $u(m) \in \text{im} C$ for all m , i.e. $u = C \circ v$ for some $v : \mathbb{R}_{\geq 0}^P \rightarrow \mathbb{R}^T$.*

Proof. Fix m . The condition $x^\top u(m) = 0$ for all $x \in \ker C^\top$ says $u(m) \in (\ker C^\top)^\perp = \text{im} C$. If $u(m) \in \text{im} C$ for all m , put $v(m) := C^+ u(m)$, then $Cv(m) = CC^+ u(m) = u(m)$. Conversely, $x^\top Cv = 0$ for every P -invariant x . $\square$

Note that v can have negative entries for reverse firings.

Conservation fails under generic parameters. A model updates a marking as $m_p^+ = m_p + r_\theta(h_p) + c$, with a free output bias $c \in \mathbb{R}$. This is the same that message-passing models with an MLP readout do. Let x be a P -invariant where $\sum_p x_p \neq 0$. Two parameter vectors differing only in c give values of $x^\top(m^+ - m)$ that differ by $(c - c') \sum_p x_p \neq 0$. This means that for every input and every value of the other weights, at most one value of c conserves x . Thus, the conserving parameters form a set of Lebesgue measure zero, giving gradient training no reason to find. In short, a loss can drive such a model towards conservation, but nothing in the architecture keeps it there on new inputs.

A.2 The enabling rule is forced

Proposition 2 (The enabling rule is forced.). *$v_t(m) = f((m_p, e_p, \text{Pre}(p, t))_{p \in \bullet t}, a_t)$ is a rate law is local shared across nets, where $f \geq 0$ continuous. If on every pure net and from every $m(0) \in \mathbb{R}_{\geq 0}^P$ the equation $\dot{m} = Cv(m)$ has a solution that stays in $\mathbb{R}_{\geq 0}^P$ on some $[0, \epsilon)$, then $f = 0$ whenever an input place is empty.*

Proof. Suppose $f > 0$ at an argument with $m_q = 0$ for some $q \in \bullet t$. Then consider a pure net consisting of t , input places with these attributes and weights, and one new output place, letting $m(0)$ have these values. By hypothesis, there is a solution with $m(s) \geq 0$ on some $[0, \epsilon)$. The place q has no producer, so $0 \leq m_q(\tau) = -\text{Pre}(q, t) \int_0^\tau f ds$ along the solution. As $f \geq 0$, the integrand vanishes for most s , and, by continuity of f and of the solution for every s , especially at $s = 0$, there is a contradiction. $\square$

The rate law is the same formula everywhere, which means that if it should fire a transition with an empty input place, we could build a one-transition net that creates this situation. As nothing refills the empty place, it would go negative.

However, as negative markings are forbidden, the rate has to be zero when an input place is empty. This is important because this tells us that the enabling rule is not a design choice that we impose, but a consequence of non-negativity. Any learned or handwritten rate law that is local, shared, continuous, and that keeps markings nonnegative has to respect it, while one that violates it will, at some point, produce impossible states. For one firing at a time, as in the jump chain of Section 3 and in the token game, the rule is force without locality. On a pure net, a transition t that is not enabled at m has $m_p < \text{Pre}(p, t)$ for some input place p , so a rate law that keeps every marking non-negative has to set $\lambda_t(m) = 0$. The valence net is pure, and this zero rate is the mask of Section 4.1, applied to m° of Proposition 4.

A.3 Cancellation and invariance of the readout

Setting. The two graphs $G_A = (V_A, x^A, b^A)$ and $G_B = (V_B, x^B, b^B)$ with node attributes x and bond types $b(\cdot, \cdot)$, where $0 = \text{no bond}$, and $\pi = V_B \rightarrow V_A$ is injective. The R -ball of node (atom) i is the attributed (sub) graph induced on the nodes within distance R of i . $\psi_G(i)$ only depends on the isomorphism class of the R -ball of i in G . Let $D \subseteq V_B$ contain i if $x_i^B \neq x_{\pi(i)}^A$, or $b^B(i, k) \neq b^A(\pi(i), \pi(k))$ for some $k \in V_B$, or $b^A(\pi(i), u) \neq 0$ for some $u \notin \pi(V_B)$, and let $D_R = \{i : \text{dist}_B(i, D) \leq R\}$.

In chemistry terms, we have two molecules A and B that are atom-to-atom mapped by π . The featuriser $\psi_G(i)$ describes the atom i by its chemical environment within R bonds. D is the set of atoms in B where elements or bonding differs from their counterparts in A and D_R adds every atom within a radius of R . This is conceptually similar to the DRFP fingerprint.

Proposition 3 (Cancellation and invariance). *Let $r = \sum_{i \in V_B} \psi_B(i) - \sum_{j \in V_A} \psi_A(j)$. Then $r = \sum_{i \in D_R} [\psi_B(i) - \psi_A(\pi(i))] - \sum_{j \notin \pi(V_B)} \psi_A(j)$. Specifically, attaching the same attributed subgraph by one edge to i and $\pi(i)$, where i is more than $2R$ away from D and the attributes of i and $\pi(i)$ change identically, leaves r unchanged.*

Lemma 1. *If $\text{dist}_B(i, D) > R$, then π restricts to an isomorphism of the R -ball of i in G_B onto the R -ball of $\pi(i)$ in G_A . Specifically, it preserves distances to the root, and $\psi_B(i) = \psi_A(\pi(i))$.*

Proof. No node u of R -ball U of i lies in D , this means that the neighbours of $\pi(u)$ in G_A are exactly the images of the neighbours of u , with equal bond types and none of them is unmatched. By induction on $d \leq R$, π maps the nodes at a distance d from i onto the nodes at distance d from $\pi(i)$. Attributes agree on U and bond types agree on $U \times U$ due to $U \cap D = \emptyset$. $\square$

Proof of Proposition 3. As π is injective, V_A is the disjoint union of $\pi(V_B)$ and the unmatched nodes, so $r = \sum_{i \in V_B} [\psi_B(i) - \psi_A(\pi(i))] - \sum_{j \notin \pi(V_B)} \psi_A(j)$, and the terms with $i \notin D_R$ vanish by Lemma 1. For invariance, attach H to i_0 and to $\pi(i_0)$, where $\text{dist}_B(i_0, D) > 2R$, and extend π by the identity on H . As H is pendant and fully matched, and i_0 and $\pi(i_0)$ change identically, the sets D , D_R and the unmatched nodes are unchanged, so it suffices to check that no term of the formula changes. For $i \in D_R$ the triangle inequality gives $\text{dist}_B(i, i_0) > R$, so i_0 and H lie outside the R -ball of i in G_B . By Lemma 1 applied to i_0 , the R -ball of $\pi(i_0)$ in G_A is the image of the R -ball of i_0 , hence contains no $\pi(i)$ with $i \in D_R$ and no unmatched node. Therefore, every term of the formula is unchanged. $\square$

For chemistry, this means the difference fingerprint r only depends on the atoms at the reaction centre and within R bonds of this centre, and any leaving atoms. All other atoms have the same environment on both sides and cancel each other out. Invariance is a consequence of this, as decorating reactants and products identically far from the reaction centre leaves r unchanged. In short, atoms are split into three groups, those that changed or are close to a change, those far away from any change and those that leave. According to Lemma 1, the middle group contributes equally to sums and disappears, leaving only the first group plus the leaving atoms.

Similar to message passing, the encoder updates the embedding of each atom from its bonded neighbours for K rounds. Atom terms have $R = K$, and bond terms that read the embeddings of an atom and of its neighbours along bonds of one type have $R = K + 1$. In Section 6.2, we use $K = 3$ and attachment sites at least 9 bonds from D . A readout $\rho(\sum_B \psi, \sum_A \psi)$ with a generic ρ has neither cancellation nor invariance, as the sums themselves change with every spectator atom.

A.4 Validity of the token game

Proposition 4 (Validity). *Let $m_A^\circ = m_A + \frac{1}{2} \sum_i \mathbf{1}_{S_i}$ be the marking of the precursors with half a token of tolerance on every slack place. For all weights, given m is a marking visited by the token game described in Section 5, then $m^\circ = m + \frac{1}{2} \sum_i \mathbf{1}_{S_i}$ is reachable from m_A° in the valence net. Specifically m is non-negative on the bond places and at least $-\frac{1}{2}$ on the slack places, has the valence budgets of m_A , and $\sum_j b_{ij} \leq x^{(i)\top} m_A + \frac{1}{2}$ for every atom i .*

Proof. By induction over the steps. A step re-types one bond place B_{ij} from its order to another order in $\{0, 1, \frac{3}{2}, 2, 3\}$. If the order grows by δ , the step is a firing of $t_{ij}^{+\delta}$. The game admits it only if $\delta \leq s_i + \frac{1}{2}$ and $\delta \leq s_j + \frac{1}{2}$, which is the enabling rule at m° , whose slack places hold $s_i + \frac{1}{2}$. If the order is reduced by δ , the step is a firing of $t_{ij}^{-\delta}$, which is enabled. Therefore, the next marking is reachable, non-negative, and the valences, being P -invariant, remain unchanged. $\square$

A few notes. (1) The half token is needed for aromatic bonds. (2) We make the following design choices given the data: A game re-types each bond place once per reaction at most and fires twelve times at most. (3) The budget of an atom depends on its element and on its state in m_A as an atom already cationic or hypervalent there keeps its spare tokens. (4) Training states $m_A + C\sigma_F$ apply random parts of a target firing vector without order and does not have to be reachable. The guarantee only concerns the markings visited at inference. (5) A new bond needs $\delta \geq 1$, so a carbon with a valence budget of four, with $\sum_j b_{ij} \leq 4\frac{1}{2}$, never gets a fifth bond. Aromatic carbons at a ring fusion hold $4\frac{1}{2}$ in m_A and aromatic carbons with an exocyclic double bond hold 5. Only the Kekulé net of AppendixB caps their total bond order at four.

Lemma 2 (Realisability on the valence net). *Let σ be a firing vector of the valence net with $\sigma_t \leq 1$ for every transition t and at most one fired transition on every bond place. Let $m = m_A + C\sigma$ be non-negative. Then every sequence that fires the transitions of σ once each, with the bond-breaking ones first, is enabled at m_A , so σ is the count vector of a firing sequence enabled at m_A . The same holds with m_A° , the precursors with half a token more on every slack place (see Proposition 4), in place of m_A whenever $m^\circ = m_A^\circ + C\sigma$ is non-negative.*

Proof. A firing $t_{ij}^{-\delta}$ of σ is enabled at every marking before it, as no other firing of σ changes B_{ij} and $\delta \leq b_{ij}$ at m_A as $m \geq 0$. Breaking a bond only adds tokens to slack places. Let s' be the slack after all breaks, and let $t_{ij}^{+\delta}$ be a bond-forming firing after some of the others. Every forming firing removes tokens, which means that S_i then holds at least s'_i minus the tokens of all forming firings at i except this one, that is, at least $m_{S_i} + \delta \geq \delta$. Same for S_j . Therefore, every step is enabled and the same holds for m_A° . $\square$

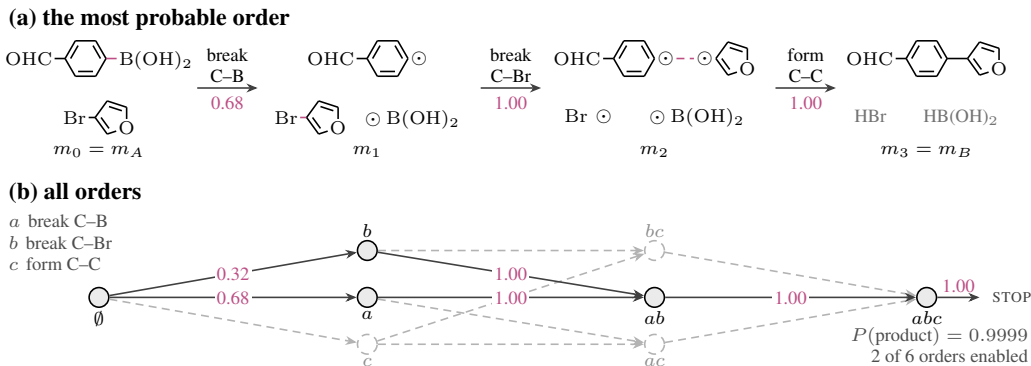


Figure 2: A bromo Suzuki-type coupling as a token game of the model trained without precomputed mappings. (a) Showing the most probable order, each bond that changes in magenta, dashed if formed. $\odot$ is a token that a broken bond returns to the slack place of its atom. The order is valence bookkeeping, not the Pd mechanism, which would break C-Br first. (b) Forming C-C requires a token of free valence on both aryl carbons that can only be supplied by the two breaks, meaning enabling excludes the four orders that form C-C before the two bond breaks. The two remaining orders fire the same transitions and reach the same product.

This means that the converse of the state equation, which fails in general as discussed in Section 3 holds for the firing vectors that the mapper returns and that the token game trains on, whenever the seated product marking is non-negative. In chemistry terms this means that breaking every bond first frees all the valence that the formations need. Therefore, the valence rule can forbid an order of the bond changes, such as a new bond to a carbon that still has four bonds, however, it can never forbid a product in which every atom stays within its valence budget, as long as each bond changes at most once because breaking the bonds first is then always an allowed order. So if we keep only training targets with an allowed order (Appendix B), it only ever asks that their products have valid valences.

A.5 What two markings can and cannot identify

Our layers are shaped by three gauge freedoms that limit what any estimator recovers from pairs of markings.

- **Rate scale.** The embedded jump chain only uses λ through $\lambda_t(m)/(\lambda_{\text{STOP}}(m) + \sum_{t'} \lambda_{t'}(m))$, this means that a common factor $e^{c(m)}$ on all the rates at a marking does not change any observation. Untimed pairs, as we have in chemistry, only identify the relative law. However, given timed chemistry data means that reactants and products by themselves could not tell fast kinetics observed briefly from slow kinetics observed for long. A P -invariant term $x^\top m$ in every log rate, which in chemistry is the valence budget of an atom, is such a factor that is constant along every path. Therefore, which bond changes happen would solely depend on how the possible changes compare and never on an overall speed or concentration.
- **The kernel of C .** Any given pair of markings only fixes σ modulo $\ker C$, which is large in the valence net. This means that a bond formed and then broken again, or a double bond made in one step instead of two, does not leave any trace in the products. Excluding both those cases, the token game re-types each bond place only once, making $\sigma \mapsto C\sigma$ injective and σ a function of the change $P_\pi m_B - m_A$ under a correspondence π . The map $\pi \mapsto \sigma(\pi)$ is constant on correspondences that differ by a symmetry of an unchanged part, moving the ambiguity to the choice of π , and the mapper whose minimum contains no cycling, is the right encoder for the inverse problem. For chemistry, this means that swapping two equivalent atoms, while changing the atom map, does not affect the bond changes. Therefore, uncertainty is limited to which atom is which, and this is left to the atom mapper.
- **Orders inside a trace.** Assuming that transitions a and b are enabled at m in any order and nothing enabled after both, the chain fires a or b first with a probability of x or y , respectively, and stops with a probability $z = 1 - x - y$, and stops after the first firing with a probability of s_1 or s_2 . The four final markings are seen with the probabilities z, xs_1, ys_2 and $x(1 - s_1) + y(1 - s_2)$, so the order is never recovered. Therefore, two markings identify which transitions fire, not the order in which they do. This also applies to chemistry, and not required by our models.

In summary, products fix the net bond changes and not the route, the speed, or anything constant along the way, and the layers are shaped in a way that they learn exactly the part that is fixed and nothing else.

B Implementation details

Training. All our networks are trained with AdamW with a weight decay of 10^{-5} as optimiser and a one-cycle learning rate schedule peaking at 10^{-3} , and at 4×10^{-4} for the rate law with width 256 after a warm-up over the first 10 % of the steps with gradients clipped at norm 1. For the token game on USPTO-MIT we use $4 \cdot 10^{-4}$. The table gives the hyperparameters of the models we report on Schneider50k and USPTO-MIT. The DRFP baseline is a perceptron with one hidden layer of 1 024 units and a dropout of 0.2, trained with AdamW and a weight decay of 10^{-4} for 40 epochs at a constant learning rate of 10^{-3} .

	token game	width 256	one-shot counterparts	classifier	classifier, firing vector
width	128	256	128	128	128
message-passing rounds	6	8	6	3	3
attention layers	4	8	4	—	—
epochs	60	60	60	60	60
batch size	32	32	32	64	64
parameters	1.6M	9.8M	1.6M	2.1M	2.5M

- **Features.** We one-hot encode the element, degree, formal charge, number of hydrogens, aromaticity, and ring membership. Atom-map numbers are removed before canonical atom ordering so they are not leaked by either features or order. The encoder has one message function per bond type, residual updates, and layer normalisation.
- **Token game.** In addition to the fixed features above, the input contains two quantities that change with the marking, namely the hydrogen count of every atom at the current marking (which is the slack place, its free valence minus capacity and negative charge) and whether a bond place of the atom has fired. Pair logits come from $[h_i + h_j, h_i \odot h_j]$ (the pair feature read by the rate law for the bond place B_{ij}), the current bond type, a same-molecule flag, and a fired flag. Batch size is 32. Training fires a random part $\sigma_F \leq \sigma^*$ of some $\sigma^* \in \Sigma^*$, and the loss is $-\log \sum_t \Pr(t \mid m_A + C\sigma_F)$ over the enabled transitions that continue a vector of Σ^* containing σ_F , together with STOP if $\sigma_F \in \Sigma^*$.
- **Classifier.** We want locality, so there is no attention. Dropout is 0.2. The participation gate learns whether a precursor molecule holds a seated atom from the maps via a binary cross-entropy of 0.5. We matched the

number of parameters with the generic comparison. The generic head pools each side and adds one learned term per seated atom. When marked, the transition types that fired are predicted by an auxiliary head, with targets from the maps of the mapper of all training reactions, including those with withheld class labels.

- **Forward.** On the USPTO-480K forward prediction, the rate law has width 256, eight message-passing rounds and eight attention layers over the whole marking, 9.8M parameters, and is trained for 60 epochs with batches of 32 reactions, a peak learning rate of $4 \cdot 10^{-4}$ and mixed precision. The targets are the minimum firing vectors of the mapper that decode to the recorded product, up to eight per reaction. A training reaction without such a vector is left out, which keeps 393 621 reactions, against 399 184 with the recorded atom maps. After every epoch the model is scored greedily on 1 500 validation reactions, and the best epoch is kept. At test time, a beam of width 5 merges count-equivalent sequences. The variant without the enabling rule is the same network with the mask removed, so it may fire any transition whose input places hold tokens, whether or not the atoms have room for the new bond.

	token game, recorded maps	token game, targets of the net	token game, targets of the net, no enabling
width	256	256	256
message-passing rounds	8	8	8
attention layers	8	8	8
epochs	60	60	60
batch (reactions)	32	32	32
peak learning rate	$4 \cdot 10^{-4}$	$4 \cdot 10^{-4}$	$4 \cdot 10^{-4}$
beam width at test time	5	5	5
training reactions	399 184	393 621	393 621
parameters	9.8M	9.8M	9.8M

- **Enzyme classifiers.** The CARE and ECREACT classifiers are the state-equation readout of Section 4.2 with the participation gate, trained with AdamW, a weight decay of 10^{-4} and a one-cycle schedule for 40 epochs; the model after the last epoch is evaluated. They have 4.6M and 4.8M parameters, the difference coming from the output layer over 4 874 and 5 192 EC numbers. The EnzymeMap classifier reads the firing vector of the mapper, as on Schneider50k, and is trained for 60 epochs.

	arrow net	electron net	classifier, CARE, ECREACT	classifier, EnzymeMap
width	256	256	128	128
message-passing rounds	6	6	3	3
attention layers	6	6	—	—
epochs	12	12	40	60
batch (atom pairs / reactions)	$\leq 2 \cdot 10^6$	$\leq 2 \cdot 10^6$	16	16
peak learning rate	$5 \cdot 10^{-4}$	$5 \cdot 10^{-4}$	10^{-3}	10^{-3}
parameters	7.3M	8.2M	4.6M / 4.8M	2.5M

- **Mechanism nets.** The shell capacity of an element is the largest shell of that element seen at least ten times in the training steps. Eight electrons for C, N, O, F, Cl, and Br, twelve for P, S, and I, never below what the atom starts with. Every formal charge stays within a window per element, widened by one while the step progresses. Both nets are trained with AdamW, a weight decay of 10^{-2} , a one-cycle schedule with a warm-up over the first 5 % of the updates and gradients clipped at norm 1. A step of n atoms has n^2 bond places, so batches are formed by size rather than by count: steps are sorted by size, and each batch holds steps of similar size up to $2 \cdot 10^6$ padded atom pairs and at most 256 steps, about 138 steps on average and 10 309 batches per epoch, in a random order per epoch. Twelve epochs are about $1.2 \cdot 10^5$ updates. The pair head has width 64, a step fires at most 16 arrows, and validation top-1 is measured greedily on 3 000 validation steps after every epoch. At test time, seed 0 uses a beam of 10 and seeds 1 and 2 a beam of 5.

	arrow net	electron net
token	electron pair	electron
width	256	256
message-passing rounds	6	6
attention layers	6	6
pair head width	64	64
epochs	12	12
batch (padded atom pairs)	$\leq 2 \cdot 10^6$	$\leq 2 \cdot 10^6$
peak learning rate	$5 \cdot 10^{-4}$	$5 \cdot 10^{-4}$
weight decay	10^{-2}	10^{-2}
arrows per step, at most	16	16
beam width at test time	10 / 5	10 / 5
training steps	1 445 189	1 445 189
parameters	7.3M	8.2M

Kekulé structures in the electron net. Molecules enter both mechanism nets as Kekulé structures, in which aromatic rings are written with alternating single and double bonds, as an aromatic bond of order $\frac{2}{3}$ would hold three electrons. Arrow pushing and the bond–electron matrix used by Joung et al. [2025] start from a Kekulé structure for the same reason. The valence net, in contrast, keeps aromatic bonds of order $\frac{3}{2}$, as its tokens count bond order rather than electrons, so a half token per atom is enough.

A Kekulé variant of the valence net. Every molecule is kekulised with RDKit [Landrum et al., 2026], so every bond place holds a whole number of tokens. Three changes are applied. First, a ring usually has more than one Kekulé structure, and RDKit may write a product ring in a different one than the precursor ring. This would make every bond of an unchanged ring look changed. Before the firing vector is computed, we therefore redraw each aromatic ring of the product with its double bonds in the same positions as in the precursor, using the atom map to match the atoms, so that a ring the reaction does not touch shows no bond changes. The positions are found by a maximum-weight perfect matching on the atoms that need a double bond. When no perfect matching exists, RDKit’s structure is kept. Second, the enabling rule is exact, without the half token of tolerance of Proposition 4. Third, a transition that forms a bond is also enabled only if the atom’s total bond order to heavy atoms stays within a maximum per element, measured on the training data. These are, 4 for C and N, 3 for O and 6 for S, so a spare token of capacity cannot give an atom more bonds than it can hold. With whole bond orders, the decoding rule for aromatic rings (Appendix B, rule 3) is no longer needed. Atom maps are computed on the aromatic molecules and transferred to the Kekulé atom order through canonical ranks, so both of the representations use the same maps.

Benchmarks.

Benchmarks. Atom mapping is evaluated on the Golden set by Lin et al. [2021], whose maps were curated by chemists, on the data sets recently introduced by Phan et al. [2026], and, for enzymatic reactions, on the 41 510 reactions of EnzymeMap from Heid et al. [2023b] against their validated maps. Reaction classification uses the published split of Schneider50k, whose 50 reaction classes were assigned by the rule-based NameRxn [Schneider et al., 2015]. EC classification, predicting the enzyme commission number of an enzymatic reaction, uses three benchmarks, namely, ECREACT [Probst et al., 2022a] in the split of Liu et al. [2026], on which six methods were retrained, task 2 of CARE [Yang et al., 2024] in its easy split, and EnzymeMap at EC level 3, where we compare maps from different sources as input to the same classifier (Table 13). Forward prediction is evaluated on USPTO-MIT (USPTO-480K), the patent reactions of Jin et al. [2017] in their standard split with 40 000 test reactions, and the ablations use Schneider50k, including training sets of 1 995 and 7 973 reactions for forward prediction and of 1 000 and 250 for classification. Reaction mechanisms are evaluated on the elementary steps of FlowER [Joung et al., 2025], where the electron net predicts the products of each step and whole reactions are scored as pathways of steps. Products are compared after aromaticity is perceived again, so the Kekulé structure a ring is written in does not matter. A test reaction counts for the pathway accuracy if some route from its reactants to a recorded product has every step within the top k .

Capacities of the valence net. Based on the data used in our experiments, one spare token lets N, O, Cl, Br, and I share a lone pair in one extra bond, where the atom still has eight valence electrons, and carbon has none, the enabling rule thereby keeps neutral and anionic C, N, O, and halogen atoms within the octet. S and P get two spare tokens, so they can form the S=O and P=O bonds of sulfoxides and phosphine oxides, but a sulfide cannot become a sulfone in one reaction. An atom that is already cationic or hypervalent in the precursors keeps its spare token, giving it a looser budget, while a nitro nitrogen could take a fifth bond.

Data. USPTO-MIT by Jin et al. [2017] holds patent reactions from Lowe [2012], split into 409 035 training, 30 000 validation, and 40 000 test reactions with reagents among the precursors and without stereochemistry. RDKit parses 409 006 training and 39 994 test reactions [Landrum et al., 2026]. For training and model selection we keep the 401 102 reactions with at most 100 and 70 heavy atoms in the precursors and products, respectively, to speed up training. We also remove reactions with a major product in the Golden set (940 for targets of the net, 931 for precomputed maps). The test set is never filtered, the results are shares of all 40 000 reactions, and the 6 unparsable reactions count as failures. The nested 1 % and 10 % subsets are the first 4 090 and 40 900 reactions of one fixed shuffle.

Schneider50k by Schneider et al. [2015] contains 50 000 reactions from patents in 50 classes from a rule-based classifier. 49 994 are parsable by RDKit. For classification, we use the published split, 200 training reactions per class, for a total of 10 000, and 800 per class for testing, for a total of 40 000. We use 500 training reactions to choose the best epoch.

The elementary steps of FlowER [Joung et al., 2025] come from USPTO-Full reactions whose mechanisms were imputed with 1 220 expert templates for 252 reaction classes, keeping the routes that reach the recorded product, together with the curated polar and radical steps of PMechDB and RMechDB. We use the published split into 1 445 189 training, 15 744 validation and 162 002 test steps, from 250 782, 2 801 and 28 049 overall reactions. Every atom, hydrogens included, is part of the net, and 2 905 test steps (1.79 %) move single electrons.

ECREACT [Probst et al., 2022a] is used in the split released with Enzyformer [Liu et al., 2026]: 49 202 enzymatic reactions with cofactors and common by-products removed from both sides, randomly split into 39 404 training, 4 891 validation and 4 907 test reactions. Compared to the split by Probst et al. [2022a], which keeps the products of training and test reactions apart, this split is random, and as a reaction can have more than one EC number, a test reaction can occur in training under another EC number. As in Enzyformer, training and validation reactions are pooled for training, two that RDKit cannot parse are dropped, leaving 44 293. The labels are the 5 192 four-level EC numbers of all splits, and the 224 test reactions whose EC number does not occur in training count as errors.

CARE task 2 [Yang et al., 2024], easy split, holds out reactions rather than EC numbers: 55 416 training, 5 858 validation and 393 test reactions over 4 874 EC numbers, with a median of four training reactions per EC number.

EnzymeMap is used at EC level 3 with 200 classes. Its own splits hold out whole EC classes, on which a classifier can only score zero, so we hold out reactions instead: 10 % of the reactions of every class with at least three reactions go to the test set, drawn once with a fixed seed and shared by all runs, which gives 41 816 training and 4 715 test reactions.

From a marking to a product. As previously discussed, a slack token on an atom can be a hydrogen, a lone pair, or a charge, without the marking saying which. This means that decoding a marking into molecules requires a rule set. These rules only use conservation arguments, are chosen on training reactions, and run after the token game has stopped. They are:

1. An atom whose free valence decreased first loses hydrogens and becomes an onium centre such as ammonium, once there are none left. Onium carrying a hydrogen are deprotonated.
2. S, Se and P, and I take up tokens in steps of two without a charge, while the valence expansion of S=O and P=O, and S, Se, P, and the halogens return tokens in steps of two.
3. In an aromatic ring, surpluses, and deficits at a carbon are settled by moving a hydrogen from or to a ring nitrogen where the ring has one. These are the tautomer shifts that are hidden by bond order $\frac{3}{2}$.
4. Total charge is conserved. This means that for every new cation, an atom that would have gained a hydrogen becomes an anion instead. Examples are N-oxides, nitro groups, and the halide counter-ions of quaternary salts.
5. Molecules that were touched by a firing sequence and that hold two or more heavy atoms are written in neutral form. This is by convention, unless their charges pair up within the molecule as, for example, in a nitro group. Single-atom ions stay charged.

Note that the net does not record where a hydrogen comes from, so a fragment that leaves is capped with hydrogen. The record of an atom shows bond orders, hydrogens, and formal charge as $\sum_j b_{ij} + h_i - q_i$. This is the P -invariant $x^{(i)\top} m$ of the valence net minus the fixed capacity c_i and, for cations, minus q_i . In Schneider50k, this count is the same for a product atom and the precursor atom it maps to in 99.85 % of the product atoms. This is the conservation law the net enforces (Proposition 1), and it is holding in real reactions. The 0.15 % that are lost are the price of the guarantee. Furthermore, with these rules, the firing vectors reproduce the product for 99.3 % of 5 000 training reactions in Schneider50k and for 96.6 % of all 40 000 test reactions in USPTO-MIT.

The mapping metrics. On the Golden set, we follow Lin et al. [2021]. A mapping is counts as correct if its condensed graph of reaction is isomorphic to that of the curated mapping. Where the canonical atom orders of the output of RXNMapper and of our molecules differ, the molecules are matched as graphs without stereochemistry.

The forward-prediction metric. A prediction is assumed correct, if the recorded major product (the largest recorded molecule, canonical SMILES without stereochemistry, which is not contained in USPTO-MIT) is among the molecules touched by a firing and every recorded product molecule occurs in the final marking. Molecules, such as by-products and spectators omitted in the products of a data set are naturally ignored, as in other graph-edit models. All 40 000 test reactions of USPTO-MIT, including six that could not be parsed by RDKit count for the denominator.

C General nets

Here we introduce a general net with continuous-time semantics that is separate from chemistry. It gives the layers of NPF when the rate law stays local, their guarantees and a test on measured metabolic fluxes against PGNN [Ademovic Tahirovic et al., 2025].

C.1 Continuous-time semantics and a local rate law

On general nets the rate law of NPF is local, meaning that for a transition t with attributes a_t , we set

$$\lambda_{\theta,t}(m) = \exp \left(\beta_{\theta}(a_t) + \sum_{p \in \bullet t} g_{\theta}(m_p, e_p, \text{Pre}(p, t)) \right) \cdot \min\{1, \text{enabl}(t, m)\}, \quad (5)$$

with two small multilayer perceptrons β_{θ} and g_{θ} learning a log rate constant from the attributes of the transition and a log factor per input place. They are shared across all transitions and nets. Reading only the input places, the law is local. It vanishes when an input place is empty, as Proposition 2 requires the laws. The enabling factor is continuous, as in fluid nets. The product form is that of generalised mass action, which is $g = \text{Pre}(p, t) \log m_p$ up to the enabling factor.

C.2 Forward semantics, the token-game layer

This is the continuous version of the token game described in Section 5. Every transition fires at once, in a fractional amount, compared to the chemistry that fires one at a time. One round with step h computes the demands $d_t = h\lambda_{\theta,t}(m)$, shares out the tokens of each place, limits each transition by its scarcest input, and finally applies the state equation,

$$x_p = \frac{1}{m_p} \sum_{t \in p^{\bullet}} \text{Pre}(p, t) d_t, \quad v_t = d_t \min_{p \in \bullet t} \varphi(x_p), \quad m^+ = m + Cv, \quad \varphi(x) = \frac{1 - e^{-x}}{x}, \quad (6)$$

with $\varphi(0) = 1$, $\varphi(x_p) := 0$ when $m_p = 0$ and some consumer has $d_t > 0$, and with $\min_{p \in \bullet t} \varphi(x_p) := 1$ when $\bullet t = \emptyset$, so a source transition fires its full demand. A place with load x_p offers $m_p(1 - e^{-x_p})$ tokens that is shared in proportion to the demands. A forward model is K rounds with tied weights, making depth time, and $h = 1/K$. For any demands, the layer conserves and stays non-negative.

Proposition 5 (Non-negativity of the token-game layer). *For all $d \geq 0$ and $m \geq 0$, the marking m^+ of Equation 6 satisfies $m^+ \geq 0$, $m_p^+ > 0$ whenever $m_p > 0$, and $x^{\top} m^+ = x^{\top} m$ for every P -invariant x .*

Proof. Let $\text{out}_p = \sum_t \text{Pre}(p, t) v_t$ be the consumption at p . If $m_p > 0$, every consumer $t \in p^{\bullet}$ has $v_t \leq d_t \varphi(x_p)$ because $p \in \bullet t$ takes part in the minimum, therefore $\text{out}_p \leq \varphi(x_p) \sum_t \text{Pre}(p, t) d_t = \varphi(x_p) x_p m_p = m_p(1 - e^{-x_p}) < m_p$. If $m_p = 0$, then either $\sum_t \text{Pre}(p, t) d_t = 0$, so that $d_t = 0$ for all consumers, or the convention $\varphi(x_p) = 0$ applies. In both cases, $\text{out}_p = 0$. Therefore, $m_p^+ = m_p - \text{out}_p + \sum_t \text{Post}(p, t) v_t \geq m_p e^{-x_p}$, which is non-negative, and positive if $m_p > 0$. Finally, $x^{\top} m^+ = x^{\top} m + x^{\top} Cv = x^{\top} m$ for every P -invariant x . $\square$

Therefore, each round is an enabled, continuous step of the net, which is how the layer stays a net for all weights.

C.3 Inverse semantics, the firing counts between two markings

Between two markings of a single run, NPF integrates the rate law over the elapsed time along a token game from m_A , whose end is pinned to m_B . This gives counts $\tilde{\sigma}$ and a bounded learned correction that stands in for conditioning the run on its end. A map Π then imposes the state equation $\hat{\sigma} = \Pi(\tilde{\sigma}) \in \mathcal{S} = \{\sigma : C\sigma = m_B - m_A\}$, as the I-projection, the point of $\mathcal{S}$ closes in Kullback-Leibler divergence to $\tilde{\sigma}$ made positive [Csiszar, 1975].

Every output is positive for all weights, meeting the state equation up to the tolerance of the solve, 0.006 to 0.019 mmol/gDW/h in Table 5. Up to this tolerance, the error has no component in $\text{im}C^\top$ and learning only has to resolve the part along the T -invariants, which are the cycles that cancel. Message passing cannot substitute for this layer.

Proposition 6 (Locality lower bound). *On the path net $p_0 \rightarrow t_1 \rightarrow p_1 \dots t_L \rightarrow p_L$ without T -invariants and $\sigma_k^* = -\sum_{j < k} (m_B - m_A)_j$, let f be any estimator whose output at t_k depends only on the part of the input within distance r of t_k in the incidence graph. If p_0 and p_L are farther than r from t_k , then for every $\delta > 0$ are two valid inputs on which f_{t_k} coincides while σ_k^* differs by δ . Therefore, $\sup |f_{t_k}| \geq \delta/2$ for every δ that the token range admits.*

Proof. The incidence matrix of the path net has the columns $\mathbf{1}_{p_k} - \mathbf{1}_{p_{k-1}}$ that are linearly independent. This means that $\ker C = 0$ and σ^* is determined by $m_B - m_A$. Summing the state equation over $p_0, \dots, p_{k-1}$ gives $\sigma_k^* = -\sum_{j < k} (m_B - m_A)_j$. Let (m_A, m_B) be a valid input with a firing sequence s , and let $m'_A = m_A + \delta \mathbf{1}_{p_0}$ and $m'_B = m_B + \delta \mathbf{1}_{p_L}$ with $\delta > 0$, a positive integer for discrete nets. As an input, this is valid as well. Firing $t_1, \dots, t_L$ from m'_A in amount δ each, moves δ tokens from p_0 to t_L and is enabled step by step, and then firing s , which is enabled because enabling is monotone in the marking. Its count vector is $\sigma^* + \delta \mathbf{1}_s$. The two inputs only differ at p_0 and p_L , which are farther than r from t_k , resulting in f_{t_k} taking the same value on both, while the targets differ by δ . One of the two errors is therefore at least $\delta/2$ $\square$

C.4 Results on metabolic fluxes

We cast metabolism as a Petri net whose markings are measured. With known stoichiometry, the uptake, secretion, and growth of a culture fix how metabolites change. The internal fluxes, measured by ^{13}C labelling, are the firing counts to be inferred. This tests the inverse semantics on real data, against PGNN and generic regressors. We show that the net makes the fluxes balance and lets NPF transfer to new studies and carbon sources where PGNN fails, the new studies only with unmeasured by-products open, while generic regressors projected onto the net are as accurate.

Data and net. Five studies estimated the central fluxes of *E. coli* by ^{13}C metabolic flux analysis [Ishii et al., 2007, Haverkorn van Rijsewijk et al., 2011, Long and Antoniewicz, 2019, Holm et al., 2010, Gerosa et al., 2015], and 159 of their cultures are kept. The net is the core model with the reactions of iJO1366 [Orth et al., 2010, 2011] that the studies measure or need, the Entner–Doudoroff pathway, cytochrome bo3, and the uptake of galactose, gluconate and glycerol. Places are metabolites, one biomass place, and one maintenance place. A reversible reaction is a forward and a backward transition. The two markings of a culture are one hour apart, their difference is the measured uptake, secretion, and growth. The fluxes are the firing counts of each hour. Exchanges that a study did not measure stay open as sinks, except for acetaldehyde, which no source model exchanges. We use the same nets for every method.

Closed by-products. We repeat the comparison with every unmeasured carbon by-product closed (Table 6). This makes the untrained state equation worse, 0.404 against 0.305 within studies, and NPF inherits part of it. Its fluxes still balance, and on new carbon sources it stays ahead of PGNN (0.387 against 0.979, $p = 0.03$, all 6 cultures), but within studies PGNN is ahead (0.120 against 0.170, $p < 0.001$), and on a new study the two are level (0.245 against 0.256, $p = 0.21$). A projected random forest is the most accurate on a new study and on new carbon sources (0.154 and 0.333), and within studies the most accurate method whose fluxes balance (0.117), behind ridge regression (0.095).

Table 5: Relative error of the fluxes of held-out cultures of *E. coli*, mean $\pm$ sample standard deviation over three seeds for the learned models, within the studies, on a held-out study and on other carbon sources, and the balance residual $\|C\sigma - (m_B - m_A)\|_1$ within the studies, in mmol/gDW/h.

method	within studies	new study	new carbon source	balance
NPF, GMA rate law	0.114 ± 0.002	0.153 ± 0.013	0.385 ± 0.002	0.006
NPF, rate law described in Section C.1	0.149 ± 0.007	0.157 ± 0.019	0.363 ± 0.023	0.019
PGNN, GMA rate law	0.119 ± 0.008	0.260 ± 0.019	0.798 ± 0.053	2.216
PGNN	0.144 ± 0.023	0.280 ± 0.019	0.858 ± 0.070	1.009
PGNN+ with the state equation, GMA	0.211 ± 0.017	0.208 ± 0.072	0.399 ± 0.025	0.008
random forest, projected onto the net	0.095	0.161	0.350	0.000
random forest	0.096	0.170	0.860	0.944
ridge regression, projected onto the net	0.130	0.180	0.655	0.000
ridge regression	0.095	0.207	164	172
flux sampling	0.196	0.194	0.355	0.000
pFBA	0.326	0.323	0.475	0.000
state equation alone	0.305	0.302	0.380	0.001

Table 6: The comparison of Table 5 with every carbon by-product that a study did not measure closed, carbon dioxide the only free carbon exchange. Mean $\pm$ sample standard deviation over three seeds for the learned models. NPF with the rate law of Appendix C.1 and PGNN without read arcs were not run under this rule.

method	within studies	new study	new carbon source	balance
NPF, GMA rate law	0.170 ± 0.013	0.245 ± 0.085	0.387 ± 0.020	0.011
PGNN, GMA rate law	0.120 ± 0.003	0.256 ± 0.020	0.979 ± 0.438	2.052
PGNN+ with the state equation, GMA	0.265 ± 0.088	0.355 ± 0.141	0.348 ± 0.016	2.512
random forest, projected onto the net	0.117	0.154	0.333	0.000
random forest	0.112	0.175	0.869	1.314
ridge regression, projected onto the net	0.144	0.176	0.649	0.000
ridge regression	0.095	0.207	164	172
flux sampling	0.226	0.223	0.379	0.000
pFBA	0.579	0.577	0.603	0.000
state equation alone	0.404	0.400	0.406	0.001

D Additional results

D.1 The minimum firing vector

Cost. Each mapping π yields a firing vector $\sigma\pi$ by the state equation (see Figure 3), and the mapper scores π on two levels. The first level counts the bonds formed and broken, which are the bond places that $\sigma(\pi)$ takes from empty to marked or vice versa. The second level counts the changes of bond order on kept bonds, in half bonds as an aromatic bond has an order of $\frac{3}{2}$, $2 \sum_{\text{kept}} |\Delta b_{ij}|$, and the changes of formal charge, $2 \sum_i |\Delta q_i|$. The second level only decides between mappings that tie in the first level. This is illustrated in Figure 3, where π_1 forms one bond and breaks one, and π_2 forms and breaks three bonds each. Now note that hydrogens do not have atom numbers, which we handle in the following way: For the cost, in the first level, a hydrogen on carbon gets a bond place of its own, so that a formed or broken C-H bond counts like any other bond, but not again in the second level. Most C-H bonds do not exchange under ordinary conditions, so we assume that a change of hydrogen on carbon is a bond that was formed or broken by the reaction. A hydrogen on atoms other than carbon, mostly O, N, or S, is not counted, as proton transfer with a protic solvent or with an acid or a base exchanges the hydrogen quickly, so its number on a product atom reflects the acid-base form in which the data set writes the product rather than a bond change. Finally, a map does not need to use every precursor atom. The atoms it leaves out go into by-products that are missing on the product side, such as the Cl of HCL in Figure 3a. In Schneider50k, this happens in 99.4 % of reactions. A bond from a product atom to such an atom counts as broken, and a bond between two of them counts as unchanged.

This cost is not fitted. The levels are compared in order rather than weighted against each other, with every count having a weight of one. How the cost is defined is a design decision we made based on experimenting on 200 random reactions on the Golden set, with the remaining 1 560 held out (Table 7).

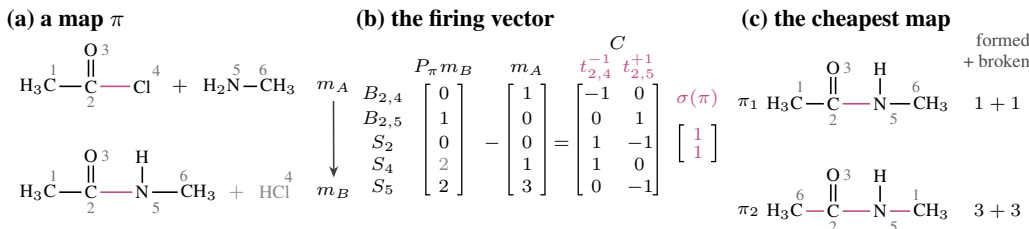


Figure 3: The firing vector. (a) A map π seats each product atom on the precursor atom with its number, and grey atoms leave unrecorded. (b) The state equation gives $\sigma(\pi)$, one firing per changed bond place, and the grey entry follows as $m_A + C\sigma$. The H that moves from N to Cl passes from S_5 to S_4 , while cycles in $\ker C$, such as the C=O of the tetrahedral intermediate, and the order of the firings stay unseen. (c) The mapper ranks maps by the bonds formed and broken, then by bond orders and charges, and returns $\hat{\sigma} = \sigma(\pi_1)$.

Finding the cheapest map. We use branch and bound. As the number of possible maps grows factorially with the number of atoms, the mapper doesn’t try them all. It places the product atoms on precursor atoms of the same atom type one by one, and, after each placement, bounds the cost of every way to finish the map from below. A branch whose bound exceeds the cost the search aims for is dropped. This is branch and bound. The bound compares neighbourhoods. The bonds among placed atoms are already fixed, so a product atom placed on a precursor atom with different neighbours causes at least one bond change. By matching all atoms that are not yet placed to their candidates at once and halving the sum (as a bond has two atoms) bounds the bonds formed and broken in the rest of the map, while a second assignment bounds the changes of bond order and charge. This assignment also rules out single candidates that cannot reach the target. An atom with one candidate left is placed at once, and precursor atoms a symmetry of the molecule exchanges are tried only once. The target starts at the bound of the empty map and rises by one bond at a time, making the first complete map found the cheapest. A search then collects all other maps with the same cost for the third level discussed in the next paragraph. A search that finishes proves that no cheaper maps exist.

Table 7: Atom mapping on the Golden set. Scored by the full condensed graph of reaction, for every level of the cost, on the 200 reactions of the random choice, the 1 560 held out, and all 1 760 usable reactions with a 95 % bootstrap interval. Of the held out reactions, 112 are only mapped correctly by the best variant of our mapper, and 66 only by RXNMapper. Proved is the share of reactions where the search finishes within 60 s.

cost	choice	held out	all	interval	proved
bonds made and broken only	83.0	81.03	81.25	79.4 to 83.1	99.94
+ second level, all hydrogen	83.5	82.44	82.56	80.8 to 84.3	99.89
+ hydrogen on heteroatoms not counted	85.0	83.40	83.58	81.8 to 85.3	99.89
+ C-H as bond places (the cost)	86.0	83.65	83.92	82.2 to 85.6	100.00
+ third level (the mapper)	91.0	88.53	88.81	87.3 to 90.2	100.00
RXNMapper	85.5	85.58	85.57	83.9 to 87.2	–

Introducing a third level. After implementing tie-breaking levels 1 and 2, a comparison with RXNMapper showed that most of our errors were still ties between maps of equally low cost. Therefore, we chose three further terms against the curated maps of the 200 development reactions, in the following order. (1) The sum of the absolute changes of oxidation state of the product carbons, as most reactions oxidise or reduce few carbons. We chose this because a step that is not a redox step moves no electrons between carbons. (2) The number of bond places that switch between an aromatic carbon and a heteroatom, as substitution there requires activation. (3) Has the number of bond places switched between an electron sink and an atom other than a carbon. A sink is a non-aromatic atom with a double or triple bond to a more electronegative atom, which can pass an incoming electron pair to that atom and take it back. This count enters with a negative sign, so the mapper prefers a nucleophile that adds to a sink while a leaving group leaves it.

The open net for missing reactants. In 4.75 % of reactions in the Golden data set and 0.85 % in Schneider50k, the products have more atoms of a given atom type than precursors. This means that no injection exists. For these reactions, the net opens with two source transitions, one for a potentially missing precursor molecule and one for a single atom of an atom type at a deficit in the products. Each costs one unit on each level. This allows us to map all 88 Golden and 426 Schneider50k reactions that previously failed.

Table 8: The Golden set by the number of places that the curated map changes, high numbers may be one-pot or multi-step reactions. Accuracy is given in %, the reactions that only our mapper or only RXNMapper map correctly with the exact sign test, and the share of curated maps that are not minimal, as they change more places than the cheapest map. Our mapper is ahead in every bin. Curated maps that are not minimal become more common the more places change, as a mechanism with more steps is likelier to move atoms along a costlier path, and a bond that forms and breaks again is invisible for every map.

places	reactions	NPF	RXNMapper	only one	p	not minimal
1 or 2	772	95.1	92.7	38 / 20	0.025	0.4
3 or 4	658	87.8	84.8	46 / 26	0.024	3.6
5 or 6	212	82.1	74.5	30 / 14	0.023	3.8
7 or more	118	65.3	62.7	16 / 13	0.711	12.7

Table 9: Atom mapping on SynRXN, our mapper against each mapper from the original publication. Reactions that only our mapper maps correctly / only the other mapper, and the exact McNemar p . The accuracies are in Table 1. Only 5 of the 382 Recon3D references are clean injections, the others reuse atom-map numbers, which caps every bijective mapper there, and 257 of the 273 of E. coli are.

set	RDT	RXNMapper	LocalMapper	GraphormerMapper
Golden	175 / 49, < 0.001	109 / 69, 0.003	119 / 108, 0.51	122 / 120, 0.95
NatComm	41 / 9, < 0.001	24 / 9, 0.01	21 / 31, 0.21	21 / 32, 0.17
USPTO-3k	78 / 40, < 0.001	3 / 45, < 0.001	4 / 173, < 0.001	17 / 106, < 0.001
Recon3D	15 / 4, 0.02	35 / 0, < 0.001	30 / 3, < 0.001	90 / 2, < 0.001
E. coli	17 / 31, 0.06	30 / 29, 1.00	22 / 14, 0.24	90 / 6, < 0.001

EnzymeMap mapping Results of our mapping system in comparison to RXNMapping of the EnzymeMap dataset reactions Table 10.

Table 10: Atom mapping of enzymatic reactions on EnzymeMap (41 510 reactions), against its validated maps. Correct reaction centre under the validator of SynRXN, as in Table 1 in %. Only one: reactions mapped correctly by our mapper only / by RXNMapper only, with the exact sign test.

criterion	NPF, minimum firing vector	RXNMapper	only one	p
reaction centre (SynRXN)	88.70	77.92	5 213 / 741	< 0.001

D.2 Reaction classification

Table 11 shows the results on the published split of Schneider50k. Table 12 shows the results of experiments testing whether the two classifiers of the net, namely the state-equation readout and the firing vector of the mapper, are more accurate than counterparts of the same size without the net, a generic readout that pools each side, a generic head on the same maps, and DRFP by Probst et al. [2022b] as a strong baseline. We ask where the Petri net helps.

Against the established baseline. The firing vector is, up to hydrogens and charges, the condensed graph of reaction counted as firings, so a D-MPNN on the condensed graph of reaction [Heid and Green, 2021], which reads the same maps is the established model closest to it. We ran it with Chemprop 2.3.1 by Heid et al. [2023a] on the same training, validation, and test reactions, label draws, and size split, with the default settings of Chemprop and nothing tuned, in three arms (Table 12), namely, the default reaction mode with 357K parameters, the balanced mode, in which atoms that leave do not count as broken bonds, and the default mode with widths of 850 instead of 300 (2.4M parameters). With all training reactions and on the size split, Chemprop keeps the epoch of the lowest validation loss. With a label budget, no validation reaction enters, and Chemprop keeps the epoch of the lowest training loss. With its default 50 epochs, a label budget gives only 200 optimiser steps at 250 labels, where the training loss stayed far above zero. After these runs had been seen, we added runs with the optimiser steps of the default run on all training reactions. The CGR D-MPNN is ahead of DRFP with all training reactions (97.61 ± 0.13 % at width 850) and behind the firing vector (98.80 ± 0.04 %, $p < 0.001$). The gap widens with fewer labels. Its best arms reach 89.18 ± 0.70 % on 1 000 and 40.53 ± 2.66 % on 250 training reactions, against 95.07 ± 0.65 and 81.19 ± 1.27 % for the firing vector (both with $p < 0.001$) and 86.62 and 65.03 % for DRFP. On larger molecules its best arm, the balanced mode, reaches 77.74 ± 3.00 %, level with the firing vector with the gate (81.30 ± 1.49 %, $p = 0.17$) and with DRFP (78.43 %).

Table 11: Reaction classification on Schneider50k, published split with 200 training and 800 test reactions per class. Mean $\pm$ sample standard deviation over n seeds. Best in **bold**, second underlined.

method	n	accuracy	macro-F1
DRFP + MLP	3	95.52 $\pm$ 0.04	95.47 $\pm$ 0.04
generic readout	3	97.74 $\pm$ 0.01	97.72 $\pm$ 0.02
generic head, firing vector	5	<u>98.64 $\pm$ 0.09</u>	<u>98.63 $\pm$ 0.09</u>
NPF, state-equation readout	5	97.68 $\pm$ 0.09	97.67 $\pm$ 0.10
NPF, firing vector of the mapper	5	98.80 $\pm$ 0.04	98.80 $\pm$ 0.04

Table 12: Classification on Schneider50k, accuracy on the 39 994 test reactions of the published split, mean $\pm$ sample standard deviation over 5 seeds for the readout, the firing vector and its generic head with all labels and 3 otherwise. With 1 000 or 250 labelled reactions, 20 or 5 per class, a stratified subsample drawn with the seed of the run, alone trains on these reactions only and + firing task also on the maps of the unlabelled rest. Larger molecules trained on reactions up to the median size and tested on the largest quarter. Firing task trained with the auxiliary task on the training reactions without a label (Appendix B). A dash where the task does not apply, as DRFP and the CGR D-MPNN have no net to attach it to, and the firing vector already holds what it predicts. The CGR D-MPNN is Chemprop 2.3.1 on the condensed graph of reaction with the maps of the mapper, 5 seeds with all training reactions and 3 otherwise, and with a label budget and matched steps it trains for the optimiser steps of its default run on all training reactions.

model	full training set	larger molecules	1 000 labelled		250 labelled	
			alone	+ firing task	alone	+ firing task
DRFP + MLP	95.52 $\pm$ 0.04	78.43 $\pm$ 0.63	86.62 $\pm$ 0.77	–	65.03 $\pm$ 1.58	–
generic readout	97.74 $\pm$ 0.01	71.76 $\pm$ 1.08	78.59 $\pm$ 1.27	90.02 $\pm$ 0.16	32.14 $\pm$ 1.64	52.64 $\pm$ 1.33
NPF, state-equation readout without gate	97.47 $\pm$ 0.14	67.43 $\pm$ 1.03	91.26 $\pm$ 0.27	94.17 $\pm$ 0.32	61.19 $\pm$ 4.24	81.65 $\pm$ 3.21
NPF, state-equation readout	97.68 $\pm$ 0.09	71.55 $\pm$ 3.65	91.57 $\pm$ 0.64	94.76 $\pm$ 0.20	57.01 $\pm$ 3.19	86.77 $\pm$ 1.26
generic head on the firing vector	98.64 $\pm$ 0.09	82.83 $\pm$ 1.03	93.83 $\pm$ 0.51	–	48.99 $\pm$ 1.31	–
NPF, firing vector of the mapper	98.80 $\pm$ 0.04	76.07 $\pm$ 3.75	95.07 $\pm$ 0.65	–	81.19 $\pm$ 1.27	–
with the participation gate	98.73 $\pm$ 0.10	81.30 $\pm$ 1.49	95.04 $\pm$ 0.55	–	79.77 $\pm$ 2.26	–
CGR D-MPNN, Chemprop defaults (357K)	96.83 $\pm$ 0.12	63.43 $\pm$ 1.26	61.25 $\pm$ 3.61	–	12.54 $\pm$ 2.32	–
balanced reaction mode	97.01 $\pm$ 0.11	77.74 $\pm$ 3.00	76.83 $\pm$ 5.10	–	9.14 $\pm$ 2.90	–
width 850 (2.4M)	97.61 $\pm$ 0.13	72.35 $\pm$ 1.02	83.33 $\pm$ 1.28	–	25.29 $\pm$ 3.61	–
defaults, matched steps	–	–	83.39 $\pm$ 2.19	–	30.33 $\pm$ 1.06	–
balanced, matched steps	–	–	89.18 $\pm$ 0.70	–	40.53 $\pm$ 2.66	–
width 850, matched steps	–	–	89.02 $\pm$ 1.50	–	39.56 $\pm$ 2.65	–

Locality of the readout. The contribution of a matched atom through the atom terms of the class readout falls from 22.2 at the re-typed bond to 0.001 four bonds away, reaches below 10^{-5} for 99.8 % of the atoms four bonds away. This is predicted by Proposition 3 for the atom terms $R = K = 3$. The exceptions lie near changes of attributes that are not bond changes.

Table 13: EC classification on EnzymeMap at EC level 3 (200 classes; 41 816 training and 4 715 test reactions, 10 % of every class held out), accuracy and macro-F1 in %, mean $\pm$ sample standard deviation over three seeds. The same classifier reads the firing vector of each source of atom maps: without maps, the state-equation readout reads the two sides of the reaction. p from Welch’s test against the classifier without maps.

atom maps	accuracy	macro-F1	p (accuracy)	p (macro-F1)
none, state-equation readout	90.36 $\pm$ 0.48	66.80 $\pm$ 0.77	–	–
RXNMapper	90.47 $\pm$ 1.00	67.23 $\pm$ 1.96	0.87	0.75
minimum firing vector (the mapper)	91.04 $\pm$ 0.74	67.51 $\pm$ 1.54	0.26	0.53
EnzymeMap’s curated maps	91.81 $\pm$ 0.12	69.63 $\pm$ 0.58	0.03	0.008

D.3 Forward prediction

Targets of the forward model. The forward model is trained on the set of tied minimum firing vectors of the mapper instead of the atom maps provided by the data set. On 10 % of USPTO-MIT these targets are ahead of the supplied maps by 1.2 points, 79.72 $\pm$ 0.03 against 78.57 $\pm$ 0.04 % greedy top-1 ($p < 0.001$, Table 15), and by 1.1 points on

the major product, 79.48 against 78.37 %. One vector of each set reaches 79.15 ± 0.26 %, between the two ($p = 0.06$ against each).

Table 14: Forward prediction on the nested 1, 10 and 25 % subsets of the USPTO-MIT training file (4 090, 40 900 and 102 259 lines), top-1 and top-5 in % of all 40 000 test reactions for the major product, the largest molecule of a prediction against the recorded major product, from beam search. NPF: mean $\pm$ sample standard deviation over three seeds, 1.6M parameters at width 128 and 9.8M at width 256. The Molecular Transformer (MT) is trained from scratch for 5 000, 50 000 and 75 000 steps, one run each.

model	1 %		10 %		25 %	
	top-1	top-5	top-1	top-5	top-1	top-5
MT	0.16	0.37	74.16	84.19	82.39	90.37
NPF, supplied maps	67.24 ± 0.24	80.36 ± 0.36	78.85 ± 0.04	88.73 ± 0.08	–	–
NPF, targets of the mapper	67.44 ± 0.19	80.45 ± 0.18	78.83 ± 0.14	88.78 ± 0.16	81.73 ± 0.13	90.64 ± 0.06
NPF width 256, supplied maps	–	–	–	–	82.95 ± 0.26	91.04 ± 0.12
NPF width 256, targets of the mapper	–	–	–	–	83.23 ± 0.20	91.00 ± 0.07

Table 15: Targets of the forward model on 10 % of USPTO-MIT, greedy and beam top-1 in % on all 40 000 test reactions under the rule of Appendix B, mean $\pm$ sample standard deviation over three seeds. Training reactions are those of the subset with a target that decodes to the product.

targets	training reactions	greedy top-1	beam top-1
atom maps supplied in the data set	39 936	78.57 ± 0.04	79.05 ± 0.04
mapper, set of tied vectors	39 381	79.72 ± 0.03	80.08 ± 0.05
mapper, one vector	39 381	79.15 ± 0.26	79.54 ± 0.25

Table 16: Forward prediction on our split of Schneider50k, 4 667 test reactions and 3 seeds. Greedy top-1 against the number of training reactions with a target, beam top-1 and top-5 with all of them, and the share of valence-valid predictions.

model	greedy top-1			beam		valid
	1 995	7 973	37 220	top-1	top-5	
NPF token game	84.31 ± 0.71	90.34 ± 0.34	93.34 ± 0.28	93.39 ± 0.18	98.08 ± 0.07	100.00 ± 0.00
without the enabling mask	84.19 ± 0.18	89.82 ± 0.64	93.06 ± 0.11	93.13 ± 0.12	98.07 ± 0.04	99.98 ± 0.02
one-shot, greedy valence repair	–	–	81.60 ± 0.50	–	–	100.00 ± 0.00
one-shot, generic	66.28 ± 0.51	75.02 ± 0.53	79.72 ± 0.22	–	–	97.21 ± 0.30

D.4 Reaction mechanisms

The arrow net scores 88.85 % top-1. Compared to the electron net, the difference comes entirely from steps that move single electrons. On the 98.21 % of test steps that move only pairs, the two nets match in scores, while the remaining 2 905 steps that move single electrons cannot be expressed by the arrow net. The electron net predicts 91.08 % correctly. Most of these steps are binding or release of phosphine at palladium, whose dative bond is written as a bond between two neutral atoms by FlowER.

D.5 What does each Petri component contribute?

The Petri net buys guarantees for every value of the weights, and accuracy where training data are scarce (Table 19). Enabling keeps every prediction valence-valid and the pure readout is unmoved by atoms far from the reaction, where the generic counterparts either break a budget or change their prediction. The mask itself does not add accuracy. Playing the net one bond change at a time is more accurate at every training size, the readout and the firing vector gain most on small training sets, and neither gains on molecules larger than those in the training set. With the participation gate, they match the generic counterparts.

Table 17: Validity of the top-1 predictions on USPTO-480K (39 994 test reactions that RDKit parses), one seed each. *Valence rule*: share of predictions whose markings respect the enabling rule of the valence net. *Valid molecules*: share of predictions whose products RDKit sanitises, with the number of invalid predictions. *Dropped fragments*: share of predictions in which a touched molecule could not be decoded and was left out. Invalid products of the aromatic models come from the half-token tolerance on aromatic bonds.

NPF model	valence rule	valid molecules	invalid	dropped fragments
aromatic, recorded maps	100	99.875	50	—
aromatic, targets of the net	100	99.897	41	0.130
aromatic, targets of the net, no enabling	99.987	99.890	44	0.138

Table 18: Validity and conservation of the predictions on the Flower test set, in %. Valid SMILES of the top-1 prediction, and the share of predictions that conserve heavy atoms, and heavy atoms, protons and electrons together. For NPF and Flower, conservation holds by construction, as every firing keeps the P-invariants of the net (Proposition 1) and Flower’s electron changes sum to zero. For NPF we report mean sample standard deviation over three seeds, all 162 002 steps. Baselines from the text of Joung et al. [2025], single runs, where Flower’s validity is given as approximately 95 %.

method	valid SMILES	heavy atoms	atoms, protons, electrons
Molecular Transformer	70.2	39.1	33.0
Graph2SMILES	76.3	30.7	17.2
Graph2SMILES+H	78.8	27.7	19.0
Flower	95	by construction	by construction
NPF, arrow net	100	by construction	by construction
NPF, electron net	100	by construction	by construction

Firing one bond change at a time. On our split of Schneider50k, the token game predicts the product for 93.34 % of the test reactions and a one-shot model with the same encoder, which labels all bond places at once and trains on the first vector of each target set, for 79.72 %. This gap grows with fewer training reactions. A valence repair, dropping a bond formation or adding a bond break until every atom is obeying the enabling rule, thereby making every output of the one-shot model valid only lifts it to 81.60 %. We can therefore say that the accuracy comes from sequential decoding, with each bond change being chosen at the marking the previous ones produced. This is an empirical effect without a proposition. Of course, sequential graph edits are not new, see Do et al. [2019] and Sacha et al. [2021], but here, they need neither a supervised order nor atom maps. Note that this comparison does not isolate conservation, as the one-shot model shares the firing form.

Table 19: Each Petri component against a counterpart of equal size without it on Schneider50k, with 4 667 forward test reactions, 3 seeds for forward prediction, and 3 to 5 seeds for classification. Mean $\pm$ sample standard deviation where shown, p from a Welch test, and a dash where a proposition guarantees the value. The rows of Proposition 3 are the pure readout, $w \equiv 1$, for which it holds. The subsamples of 1 000 and 250 training reactions, 20 and 5 per class, are stratified and drawn with the seed of the run, the same for all models of that seed. *Italic*, not load-bearing, as the Petri component is not significantly better, $p \geq 0.05$, or is worse.

component	criterion	Petri	generic	p
one bond change at a time	top-1, all training reactions	93.34 $\pm$ 0.28	79.72 $\pm$ 0.22	< 0.001
same	top-1, 1 995 training reactions	84.31 $\pm$ 0.71	66.28 $\pm$ 0.51	< 0.001
enabling (Prop. 4)	valence-valid products	100 (all weights)	97.21 $\pm$ 0.30	—
<i>enabling mask in the game</i>	<i>top-1</i>	93.34 $\pm$ 0.28	93.06 $\pm$ 0.11	0.22
readout (Prop. 3)	% changed by a far methyl	0.00	0.27	—
same	accuracy, 1 000 / 250 training reactions	91.26 / 61.19	78.59 / 32.14	0.002 / 0.003
same	<i>all training reactions / larger molecules</i>	97.47 / 67.43	97.74 / 71.76	0.08 / 0.007
<i>with the gate</i>	<i>all training reactions / larger molecules</i>	97.68 / 71.55	97.74 / 71.76	0.21 / 0.93
firing vector	accuracy, 250 training reactions	81.19	48.99	< 0.001
against a CGR D-MPNN of equal size	accuracy, 1 000 / 250 training reactions	95.07 / 81.19	89.02 / 39.56	0.01 / < 0.001
same	<i>accuracy, 1 000 training reactions</i>	95.07	93.83	0.06
same	all training reactions	98.80 $\pm$ 0.04	98.64 $\pm$ 0.09	0.01
same	<i>larger molecules</i>	76.07	82.83	0.08
<i>with the gate</i>	<i>larger molecules</i>	81.30	82.83	0.23

Enabling. With untrained weights on a set of 256 test reactions, none of the markings that the token game visits breaks the rule by more than half a token. As untrained weights do not know chemistry, the net and not the training keeps the products valid, while training alone does not avoid every violation. Without masks, the one-shot model exceeds the valence budget by more than half a token in 2.97 % of the predictions, the token game for none. Without the mask, the token game is as accurate and valence-valid in 99.98 % of predictions, meaning that the mask turns a learned regularity into a guarantee at no cost in accuracy because the rule removes orders but no product. On 5 000 random USPTO-MIT test reactions, the Schneider50k models without the mask break a valence budget in 0.16 ± 0.07 % of the predictions. The models with the mask in none at the same accuracy. The learned regularity therefore weakens where the data change, while the guarantee holds.

Readout and firing vector. Consider a methyl group attached to both sides of 4 000 test reactions, 9 or more bonds from every change. It changes no prediction of the pure readout, 0.12 % with a participation gate, and 0.27 % for a generic readout that pools each side. On the full training set, the pure readout is level with its generic counterpart ($p = 0.08$). However, it trains it on test reactions larger than those in training (64.73 against 71.76 %, $p = 0.007$, with the gate bringing it level to 71.55 %. On the full training set, the firing vector is ahead of its generic head ($p = 0.001$) and not significantly behind it on larger molecules ($p = 0.08$). However, both pay off on a stratified subsample of 250 training reactions, where the pure readout reaches 61.19 % against 32.14 % and the firing vector 81.19 % against 48.99 % for a generic readout on the same maps. On a larger subsample of 1 000, the readout stays ahead of its generic counterpart ($p = 0.002$), while the lead of the firing vector is not significant with 95.07 against 93.83 % ($p = 0.06$).